



eVOX PLATFORM

Product Catalogue

 **Bonfiglioli**


INDEX



CONFIGURATION GUIDELINES.....	2
Environmental conditions	3
Lubricant Table	5
Product Selection Guidelines	6
Application Inputs	6
Gear Unit Selection.....	8
Verification	10
COAXIAL GEARMOTOR & GEAR UNIT EVOX.....	12
Product Overview	13
Technical features.....	14
Target Applications	16
Modularity.....	18
Designation	20
Versions.....	22
Mounting positions	23
Performance	25
EVOX Coaxial Gearmotor	25
EVOX Coaxial Gear Unit.....	46
EVOX Coaxial Output Radial and Axial Loads.....	51
Sizes.....	52
EVOX Coaxial Gearmotor	52
EVOX Coaxial Gear Unit.....	53
Options available for EVOX coaxial gear unit.....	54
Option List.....	54
Option List Deep Dive	56
More on Options List	64

ELECTRIC MOTOR EVOX.....	66
Product Overview	67
Bonfiglioli Portfolio.....	67
Standards & Directives	70
Power output depending on the ambient temperature	72
Power output depending on the altitude	72
Terminal Box	72
Cable entry.....	72
Bearings.....	73
Product Modularity	74
Designation	76
Winding	78
Operation with inverter power supply	80
Protection class	81
Insulation class	82
Versions	83
Performance	84
EVOX electric motor	84
Brake EVOX Electric Motor	89
Brake Option List.....	89
Brake Performance.....	90
Brake Option List Deep Dive	92
Options EVOX Electric Motor Side	100
Option List.....	100
Option List Deep Dive	102
Sizes	109
EVOX electric motor	109
Brake and E-motor options	110
ORDER INFO	111
Our Global Presence	112

CONFIGURATION GUIDELINES

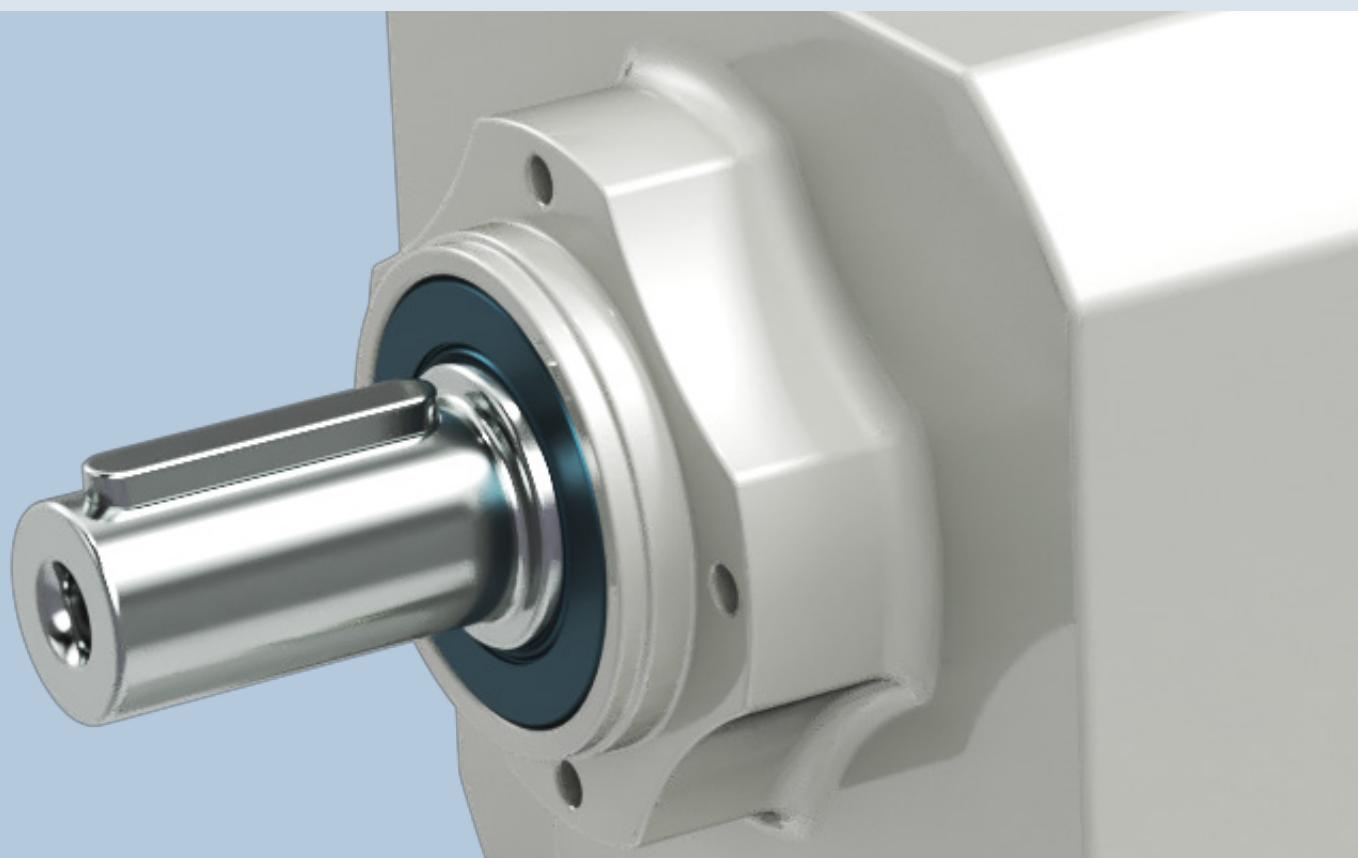

ENVIRONMENTAL CONDITIONS

Ambient temperature

The ambient temperature influences the gear unit and motor performance.

Please take into account the following guidelines for a correct product configuration:

- **Oil Seals:** please refer to the oil seal options in the catalogue section relating to gear unit options and select the correct alternative according to product operating conditions.
- **Lubricant:** if the operating temperature is outside the indicated range for the standard lubricant, please select SO to order the gear unit without oil and then refer to the [Lubricant table](#) to select the correct oil for the application operating temperature range.
- **Gear unit housing and component resistance:** if the operating temperature is below -25°C, or above 50°C, please [contact Bonfiglioli's Technical Service](#). From -25°C to -10°C, please start the gearmotor with partial loads.
- **Motor:** in case of special humidity and ambient temperature resistance requirements, please see the motor tropicalisation option.

To allow a proper heat dissipation, make sure the product is installed with adequate air circulation, away from temperature-sensitive components.

For altitude < 3000m and ambient temperature <50°C, these Gear Units thermal power is not a possible cause of fault. Should the product be operated under different conditions, please [contact Bonfiglioli's Technical Service](#).

Rating values are calculated for standard environmental conditions (40°C; altitude<1000m a.s.l) as specified in CEI EN 60034-1.

Motors can be used within the temperature range of -15°C and +40°C as standard. For temperature higher than 40°C the rated power output should be adjusted by factors given in the table below.

Ambient temperature (°C)	40	45	50
k _{ft} coefficient	100%	95%	90%

Permitted power = P_{n1} · k_{ft} · f_m

For f_m refer to the [Duty Cycle](#) options



ENVIRONMENTAL CONDITIONS

Altitude

The installation altitude influences the gear unit and motor performance. For motor temperature derating data, see the [e-motor Configuration Guidelines & Setup](#) Catalogue Section.

If the application altitude is above 1500 m and the gear unit is factory filled with oil, place the product with the oil drain plug at the top and open it to balance out the internal pressure and the external atmosphere, then close the oil plug. Make sure that no object or substance falls into the gear unit, as it could damage its internal components during its operating lifetime.

If, during its lifetime, the gear unit operates with a difference of altitude higher than 1000 m, [contact Bonfiglioli's Technical Service](#) to find the correct solution, based on the required performance, the seals equipped and the mounting position needed.

Noise Level

Gear unit noise levels have been tested according to UNI ISO 3746. The noise of the gear unit is always lower than the motor's, which is compliant with the CEI EN 60034-9 standard.



Corrosion Protection

The gear unit and motors can be configured with several devices to enhance their protection against corrosion, see EVOX Painting Options against corrosion protection and FO option to add stainless steel components to your product.

Storage

See the Product Storage Guidelines on the EVOX user manual at www.bonfiglioli.com for a thorough description of every environment and treatment conditions (for less and more than 6 storage months).

Observe the following instructions to correctly store the products:

- a) Do not store outdoors, in areas exposed to the weather or with excessive humidity.
- b) always place wooden boards or other materials between the products and the floor.

The gear units should have no direct contact with the floor.

- c) In case of long-term storage, all machined surfaces such as flanges, shafts and couplings must be coated with a suitable rust inhibiting product (Mobilarma 248 or equivalent).

In addition, the gear units must be placed with the filler plug at the top and filled up with oil.


Before putting the units into operation, top-up with the appropriate quantity and type of oil (refer to the User's manual available at www.bonfiglioli.com).

Gear Unit Efficiency

For Helical In-Line gear units, consider as a general order of magnitude $0,98^{N_{st}}$ [N_{st} = stage number], for an efficient calculation.

PRODUCT SELECTION GUIDELINES

In order to correctly choose the product that fits your needs, please refer to the Application Input parameters listed below. Choose the configuration in the performance table, then verify your EVOX with the [Verification parameters](#).

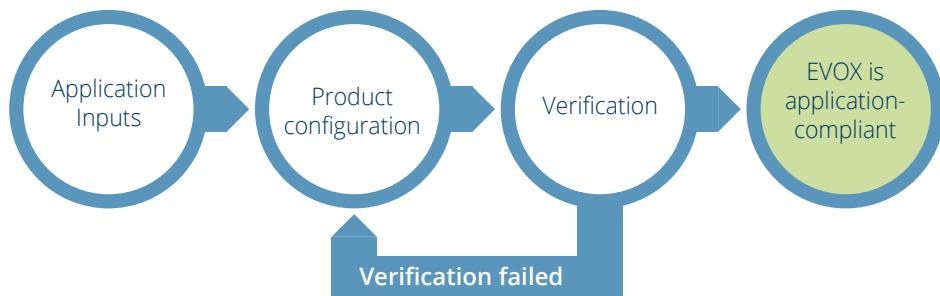

APPLICATION INPUTS

Some fundamental data are necessary to assist the correct selection of a gear unit or gearmotor. The table below briefly sums up this information.

To simplify selection, fill in the table and send a copy to [Bonfiglioli Technical Service](#), which will select the most suitable gear unit for your application.

Type of application	
P_{r2}	Output power at n ₂kW
M_{r2}	Output torque at n ₂Nm
n₂	Output speedrpm
n₁	Input speedrpm
R_{c2}	Radial load on output shaftN
x₂	Load application distance (*)mm
Load orientation at input
Output shaft rotation direction (CW-CCW) (***)
R_{c1}	Radial load on input shaftN
x₁	Load application distance (*)mm
Load orientation at input
Input shaft rotation direction (CW-CCW) (***)

A_{c2}	Axial load on output shaft (+/-) (***)N
A_{c1}	Axial load on input shaft (+/-) (***)N
J_c	Moment of inertia of the loadKgm ²
t_a	Ambient temperatureC°
	Altitude above sea levelm
	Duty type to IEC norms	S...../.....%
Z_r	Startup frequency1/h
	Motor voltageV
	Brake voltageV
	FrequencyHz
M_b	Brake torqueNm
	Motor protection degree	IP
	Insulation class

(*) Distance x1-2 refers to the distance between the point of force application and the shaft shoulder (if not indicated, the force acting at half the shaft extension will be considered).

(**) CW = clockwise; CCW = counter-clockwise

(***) + = push; - = pull

Application Service Factor

The Suggested Service Factor [S_f] is the ratio between the Nominal Table Torque [M_{r2}] and the Calculated Torque [M_{c2}] needed by your Application.



The [S_f] calculation depends on 3 factors in the previous diagram:

- **Start-up frequency [Z_r]**: this parameter **describes the gear unit start-ups per hour**
- **Daily work hours**: this parameter selects the y axis where you can check your Suggested Service Factor [S_f]
- **Mass acceleration factor [$k..$]**: this parameter describes the shock loads of your application on the Gear Unit and drives the S_f curve selection

K1: Uniform Load	K \leq 0.25	When $K = \frac{J_c}{J_m}$
K2: Moderate shock load	0.25 < K \leq 3	
K3: Heavy shock load	3 < K \leq 10	
K4: Contact Bonfiglioli's Technical Service	K > 10	
J_c = Driven masses moment of inertia reduced to the motor shaft		
$J_c = J_a \left(\frac{1}{i^2} \right)$	J_a = Driven masses moment of inertia reduced to the gear unit output shaft i = Gear Ratio	
J_m = EVOX e-motor moment of inertia reduced to the motor shaft		

PRODUCT SELECTION GUIDELINES

GEAR UNIT SELECTION

Gear Unit Configuration

- a) Determine Suggested Service Factor [S_f] according to type of duty (factor K), number of starts per hour [Z_r] and hours of operation.
- b) From values of torque [M_{r2}], speed [n_2] and dynamic efficiency [η_d] the required input power can be calculated from the equation:

$$P_{r1} = \frac{M_{r2} \cdot n_2}{9550 \cdot \eta_d} \text{ [kW]}$$

Value of [η_d] for the captioned gear unit can be sorted out from [Gear Unit Efficiency](#) paragraph.

- c) Consult the gearmotor selection tables and refer to the appropriate rated power [P_n]:

$$P_n \geq P_{r1}$$

At the end consider a Gear Unit configuration within a Service Factor S that match or exceeds the Suggested Service Factor [S_f].

$$S = \frac{M_{n2}}{M_2} = \frac{P_{n1}}{P_1}$$

Unless otherwise specified, power [P_n] of motors indicated in the catalogue refers to continuous duty S1. For motors used in conditions other than S1, the type of duty required by reference to CEI 2-3/IEC 34-1 Standards must be mentioned.

For duties from S2 to S9 extra power output can be obtained with respect to continuous duty, see the "[e-motor Configuration Guidelines & Setup](#)" catalogue section.

Accordingly the following condition must be satisfied:

$$P_n \geq \frac{P_{r1}}{f_m}$$

The adjusting factor [f_m] can be obtained from table below.



Intermittence ratio

$$I = \frac{t_f}{t_f + t_r} \cdot 100$$

t_f = operating time under constant load
 t_r = rest time

	Duration						Please contact us	
	S2			S3*				
	of the duty cycle [min]			Cycle duration factor [I]				
	10	30	60	25%	40%	70%		
f_m	1.35	1.15	1.05	1.25	1.15	1.1		

* Cycle duration, in any event, must be 10 minutes or less. If it is longer, please [contact Bonfiglioli's Technical Service](#)

Next, refer to the appropriate [P_n] section within the gearmotor selection charts and locate the unit that features the desired output speed [n_2], or closest to, along with a Service Factor S that meets or exceeds the Suggested Service Factor [S_f].

The Service Factor is so defined:

$$S = \frac{M_{n2}}{M_2} = \frac{P_{n1}}{P_1}$$

Selection of speed reducer and gear unit with IEC motor adapter

- Determine Suggested Service Factor [S_f].
- Assuming the required output torque for the application [M_{r2}] is known, the calculation torque can be then defined as:

$$M_{c2} = M_{r2} \cdot S_f$$

- The gear ratio is calculated according to requested output speed [n_2] and drive speed [n_1]:

$$i = \frac{n_1}{n_2}$$

Once values for [M_{c2}] and [i] are known consult the rating charts under the appropriate input speed [n_1] and locate the gear unit that features the gear ratio closest to [i] and at same time offers a rated torque value [M_{n2}] so that:

$$M_{n2} \geq M_{c2}$$

If a IEC motor must be fitted on the gear unit, check the geometrical compatibility with the gear unit in [Gear units performance tables](#).

PRODUCT SELECTION GUIDELINES

VERIFICATION

After the selection of the speed reducer, or gearmotor, is complete it is recommended that the following verifications are conducted:

Thermal capacity

For altitude < 3000m and ambient temperature <50°C, these Gear Units thermal power is not a possible cause of fault. Should the product be operated under different conditions, please [contact Bonfiglioli's Technical Service](#).

To allow a proper heat dissipation, make sure the product is installed with adequate air circulation, away from temperature-sensitive components.

Load Conditions on Gear Unit Shafts



Please shown in the [Catalog Performances Table](#).

External Load Calculation on Gear Unit Shafts

External transmission could generate loads on the Gear Unit shafts.

The guidelines below are used to calculate the radial load.


This is a very simplified method to get the order of magnitude of the radial loads on the Gear Unit shafts. We recommend you follow more detailed considerations on your application to select the correct EVOX Gear Unit.

$R_c = \frac{2000 \cdot M_a \cdot K_r}{d}$	
$K_r = 1$	
$K_r = 1.25$	
$K_r = 1.5 - 2.0$	

Position of the radial component on the gear unit shafts

Radial loads in performance tables are considered as applied in the middle of the shaft.

To compare the radial component of the force applied on the output shaft [R_c] with the value [R_{max}] specified in the performance tables, shift the line of action of [R_c] using the following formula so as to keep the stress on bearings unchanged.

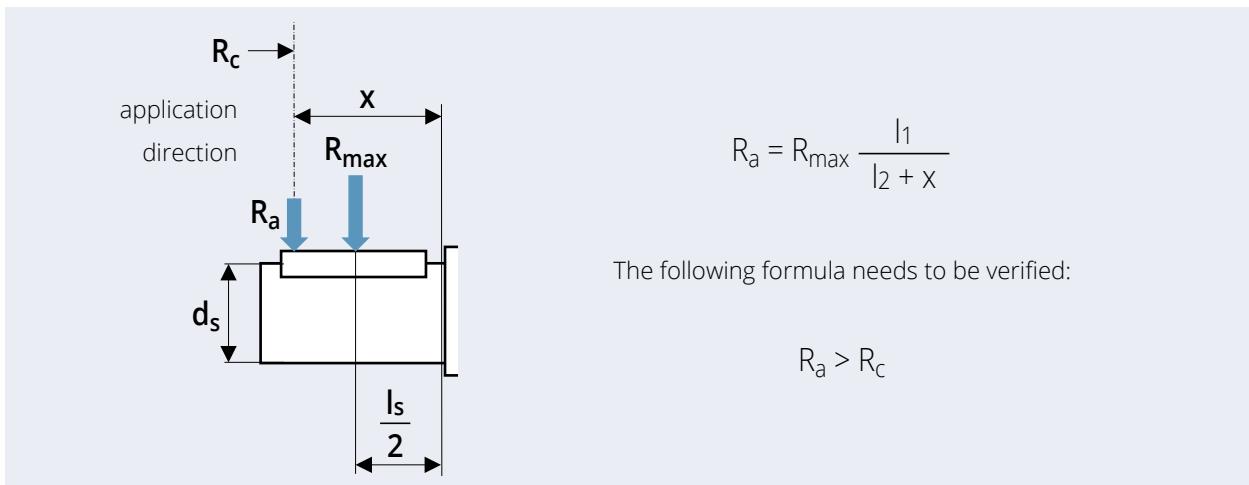

Check values [l_1] and [l_2] in the following tables:


Size	l_1	l_2	Coaxial Gear Unit Output Shaft		l_1	l_2	ds	l_s
			ds	l_s				
			[mm]					
07	87	67	20	40	3.425	2.638	3/4	1-9/16
17	97.75	77.75	20	40	3.848	3.061	3/4	1-9/16
37	118	93	25	50	4.646	3.661	1	2
47	130.2	100.2	30	60	5.126	3.945	1-1/4	2-3/8

Size	Solid input shaft			
	l_1	l_2	ds	l_s
[mm]				
HS1	97	77	16	40
HS2	81	61	19	40
HS3	117.5	92.5	24	50
[in]				
NHS1	3.819	3.032	5/8	1-9/16
NHS2	3.189	2.402	3/4	1-9/16
NHS3	4.626	3.642	7/8	2

Axial Load on Shafts

If the force on the output shaft has both radial and axial components, [contact Bonfiglioli's Technical Service](#) and check if your solution is suitable.

COAXIAL GEARMOTOR & GEAR UNIT EVOX

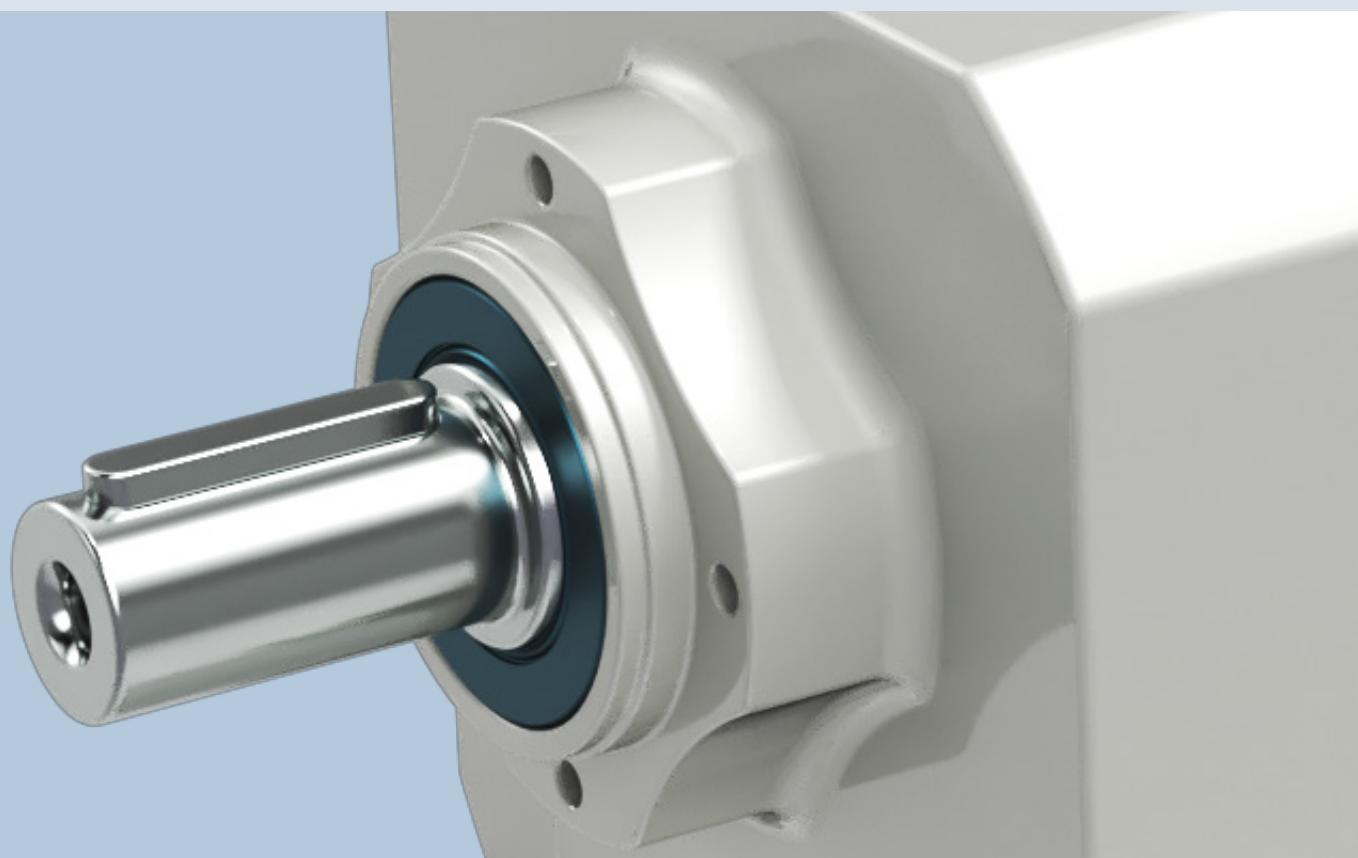

PRODUCT OVERVIEW

EVOX is Bonfiglioli's new gearmotor platform; the EVOX family starts with the new **CP**.

EVOX CP is a Helical In-Line product designed with a smooth housing and a performance/value focus.

The interface, aligned with the market standards, allows adapting EVOX CP to most existing industrial machines without the need for specific machining. Thanks to the wide range of versions/options and motors available in **Bonfiglioli's portfolio**, this new product can meet a wide range of application needs.



Features	Benefits
Overall dimensions in line with market standards	Fully interchangeable with market standards
Smooth surface	Easy-clean shape
Every mounting position available with the standard Product	Lower codes in stock
High torque density for in-line technology	High roughness and performances
Reinforced radial/axial bearing option	Product ready for decentralized transmission
Feet & flange output & long speed ratios	Product ready for pumps & compressors

EVOX CP sizes	Nominal torque [Nm]	Gear ratio range	Max radial loads [N] ¹	Maximum compact gearmotor power [kW]	[hp]
07	55	2.8-81.2	1470	0.37	0.5
17	100	2.4-85.9	2460	0.75	1
37	200	2.3-133	4110	1.5	2
47	335	2.4-172	5240	4	5.5
57	500				
67	650				


(1) Max performances @ 1400 rpm in input, Nominal output torque and radial load, applied in the middle of the o. shaft.

This value could change with the gear ratio

PRODUCT OVERVIEW

TECHNICAL FEATURES

Gear Unit – Coaxial CP

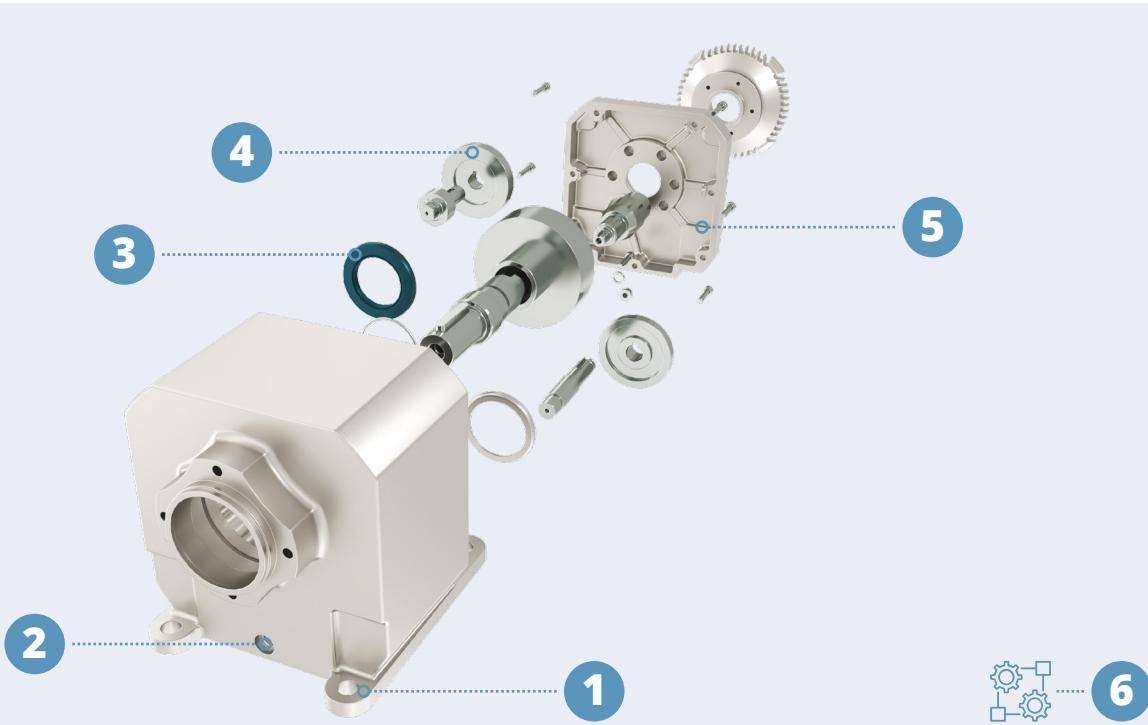

1

Overall dimensions in line with market standards

2

Every mounting position possible with one product

With its unique oil level, this gear unit can be fitted on any position.

3

Reliability focus for every standard component

Using more reliable components improves the reliability of the whole product.

4

Efficiency and low noise gears set

These highly effective gears reduce oil heating, preventing its leakage through the seals.

5


Product flexibility/modularity

Easy assembly with simple equipment.

6

Great set of versions and options

Electric Motor – MXN/MNN

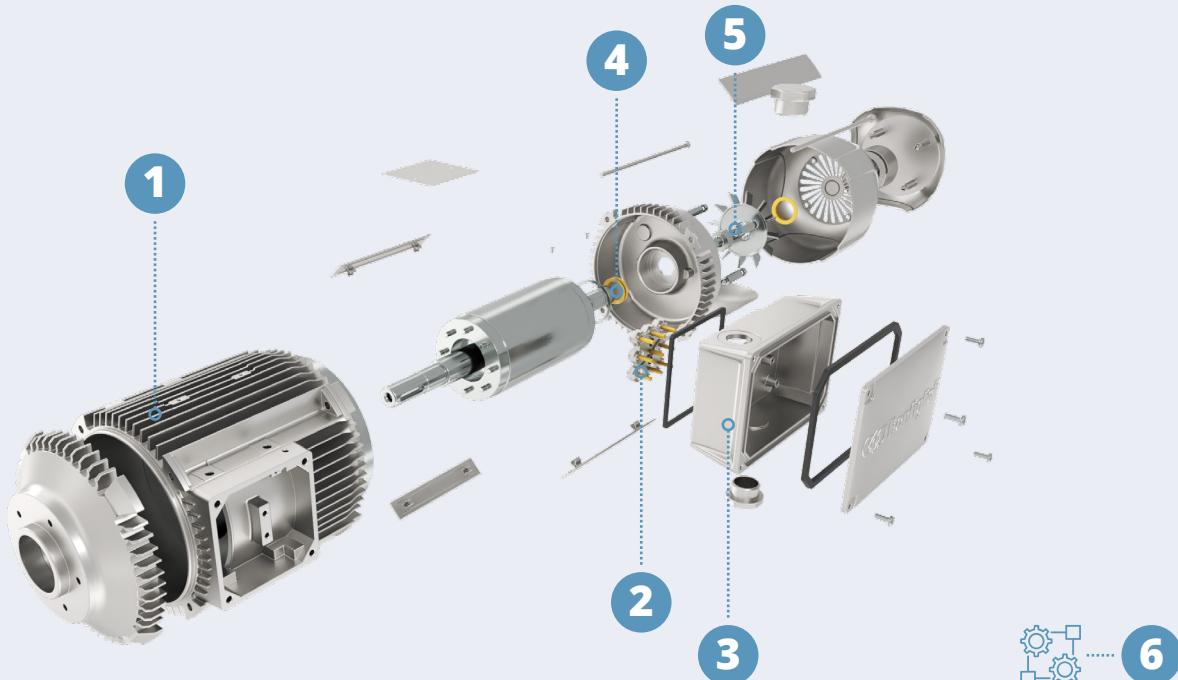

1 Uncompromised IE3/NEMA Premium Efficiency

This motor is compliant with the most severe regulations in the world in terms of efficiency.

2 One motor for EU, USA, India & Australia

With its particular 9-PIN terminal box, you could get the right voltage for most markets.

3 Reliability focus for every standard component

Using more reliable components improves the reliability of the whole product.

4 Rotating terminal box

With this feature, you could rotate the terminal box in every position you need.

5 Modular brakes and encoders

6 Wide range of versions and options

PRODUCT OVERVIEW

TARGET APPLICATIONS

- Product fully interchangeable with market standard
- **IE3/NEMA Premium uncompromised efficiency** making it technically ready for premium efficiency applications worldwide.



Options for high radial and axial loads
making this product suitable for screw conveyors and/or decentralized transmissions.



Market Best-in-Class in terms of Torque making the product with the highest torque density of its category.



**AUTOMATIC GATES &
BARRIERS**



RECYCLING



TEXTILE



FOOD & BEVERAGE



PACKAGING



**HEATING, VENTILATION &
AIR CONDITIONING**



MATERIAL HANDLING


PRODUCT OVERVIEW

MODULARITY

Gear Unit – Coaxial CP



These gear unit solutions can meet **all basic MKT needs**.
Soon to be followed by several other products.

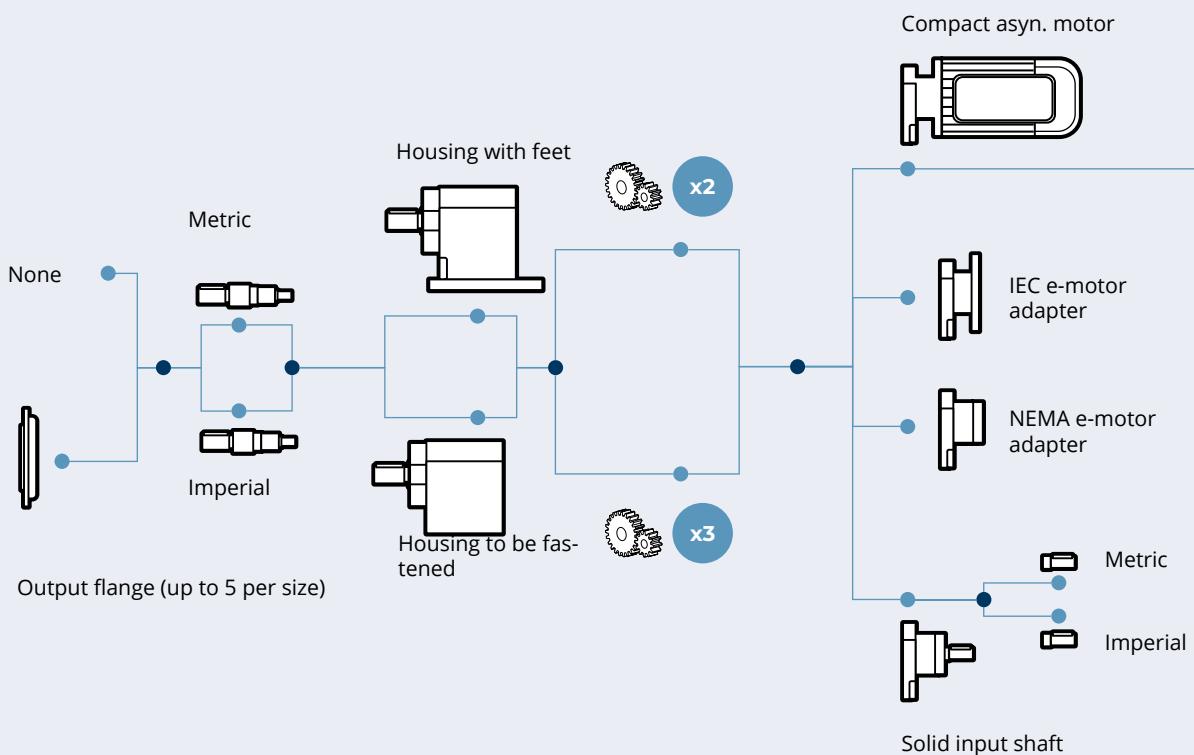


Feet and Flange config available

Electric Motor – MXN/MNN



Lots of e-motor versions available to perfectly **match** your application needs.

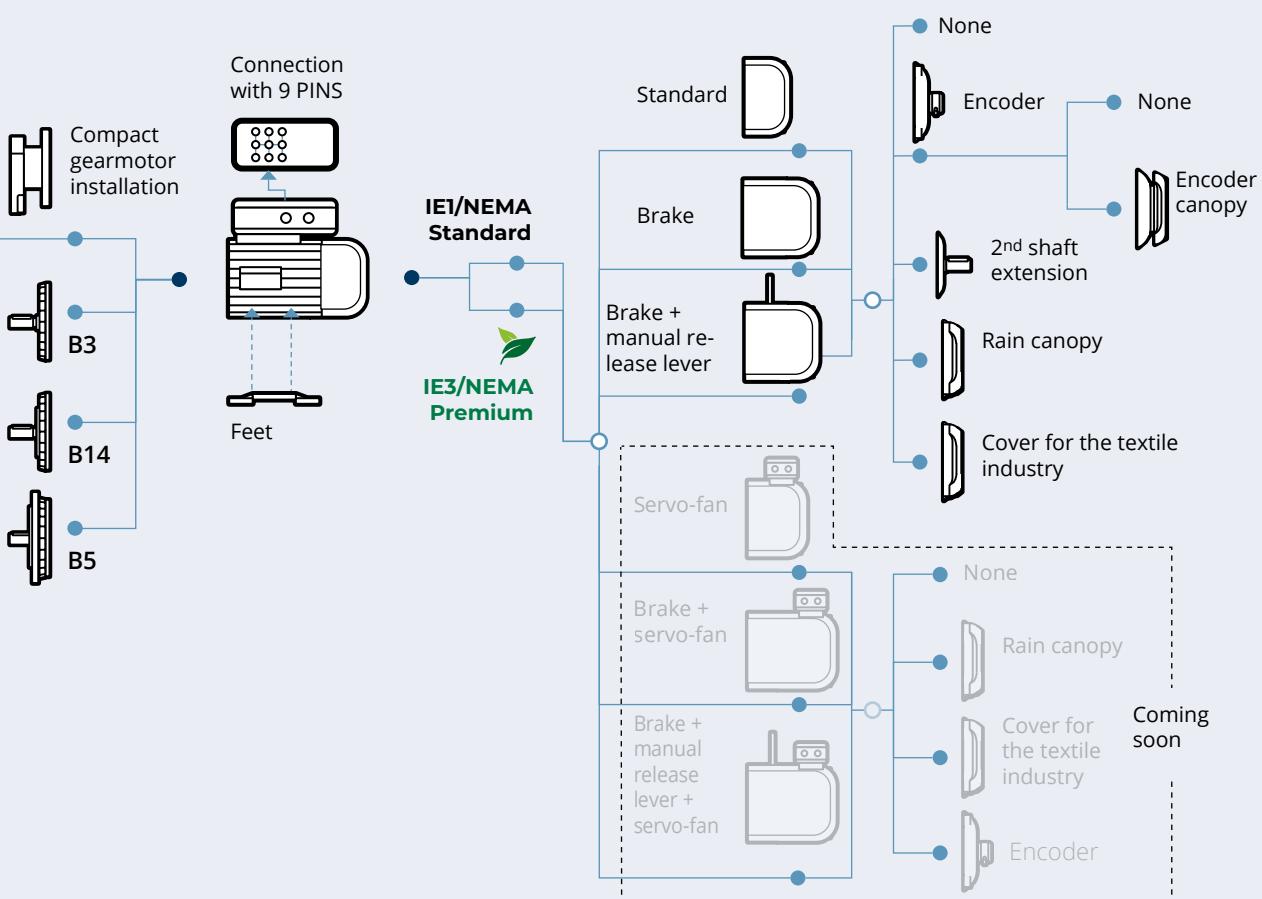

DC brake are available.

DESIGNATION

Gear Unit – Coaxial CP

CP	37	2	N	P	F140	7.5	S20	All	+ Options	+ Motor

Size

- 07 55 Nm
- 17 100 Nm
- 37 200 Nm
- 47 335 Nm
- 57 500 Nm
- 67 650 Nm

Gear unit series
CP Coaxial

Stages

- 2
- 3

Output shaft

- Metric
- N Inch

Housing

- P Feet
- U Shaft mounted

Output flange dimension

- No flange
- F120 Ø120 flange
- F140 Ø140 flange
- F160 Ø160 flange
- F200 Ø200 flange
- F250 Ø250 flange

Gear ratio

See "Performance Tables - Gear Units"

Inputs

See "Input table"

Mounting positions

All Every mounting position is possible as standard
For exceptions see [link]

See "Options | available for EVOX coaxial gear unit"

Electric Motor – MXN/MNN

MXN	20MB	4	WD1	60	IP55	CLF	C	N	+	Brake	+	Options

MXN | 20MB | 4 | WD1 | 60 | IP55 | CLF | C | N | + | Brake | + | Options

See "[Option | EVOX Electric Motor Side](#)"

See "[Brake | EVOX Electric Motor](#)"

Terminal box position

(Standard)

Motor Versions – Integrated motors (MXN, MNN)

Insulation class
CLF

Motor without brake Motor with brake

IP55 Standard IP54 Standard

IP56 Option IP55 Option

Winding frequency - Only for Brake motors*

50 - 50Hz
60 - 60Hz

Winding

See "[Winding - Voltage/Frequency correspondences table](#)"

Poles
4

The Winding and Winding frequency fields will be automatically generated by the product configurator. These values will be different from the ones selected by the user. For more info about winding correspondences see [table Product selector Winding - Voltage/Frequency correspondences](#)

Size

See "[Asynchronous E-Motor Performance Table](#)"

Asynchronous Compact E-motor series

MXN IE3/NEMA Premium

MNN IE1/NEMA Standard

* The "Winding frequency" field is only present in case of FD brake with direct supply (DIR)

DESIGNATION

VERSIONS

Gear Unit – Coaxial CP

Input table

Input type	Sizes							
	P56	P63	P71	P80	P90	P100	P112	P132
IEC motor adapter	P56	P63	P71	P80	P90	P100	P112	P132
Compact motor adapters	-	S05	S10	S20	S25	S30	S35	Coming soon
Solid Shaft		HS1/NHS1		HS2/NHS2		HS3/NHS3		
NEMA motor adapter			N56	N143	N145	N182	N184	N213 N215
CP07								
CP17		X						
CP37		X		X				
CP47				X		X		
CP57								Coming soon
CP67								

IEC and NEMA input coupling available
 Solid input shaft coupling available

Output flange table

	Sizes				
	F120	F140	F160	F200	F250
CP07	X				
CP17	X	X	X		
CP37	X	X	X	X	X
CP47		X	X	X	X
CP57					Coming soon
CP67					

Output flange compatible
 PF feet and flange version availability



MOUNTING POSITIONS


Gear Unit – Coaxial CP

Every mounting position possible with one code

Thanks to the enhanced performances and the reliability of components, this gear unit can be mounted in every possible position as standard.

EVOX CP is supplied with a long-life oil fill and a single level for every possible mounting position. By selecting the SO option, the gear unit is shipped by Bonfiglioli without oil and can be filled by the customer, using a special plug.

This feature can increase the flexibility of your design and allow you to install this product in any possible position.

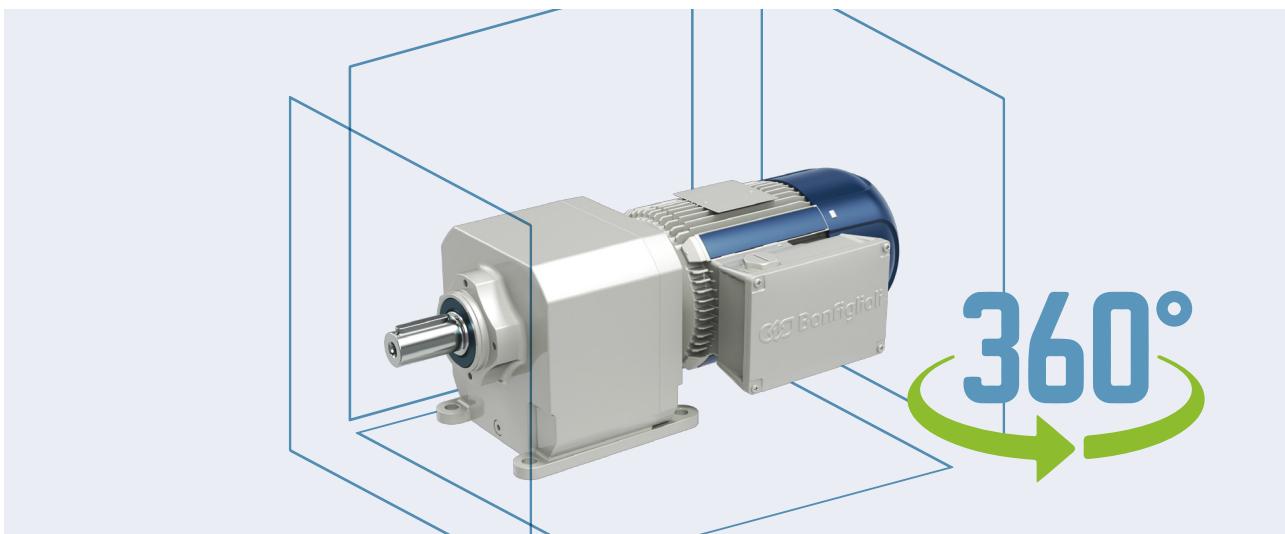



Mounting position limitations

Reinforced output bearings option [OHA - OHR]

If you need EVOX CP with both:

- OHR or OHA
- vertical position with the output shaft up, or a position within 60° of it, facing any direction, [contact Bonfiglioli's Technical Service](#) and check whether the standard oil level is correct for your application or if a customised solution is required.

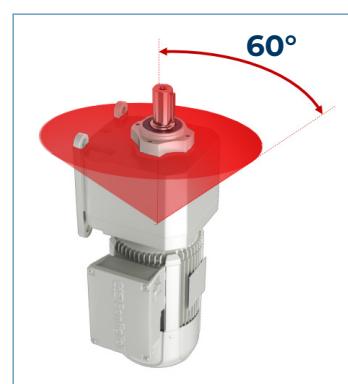

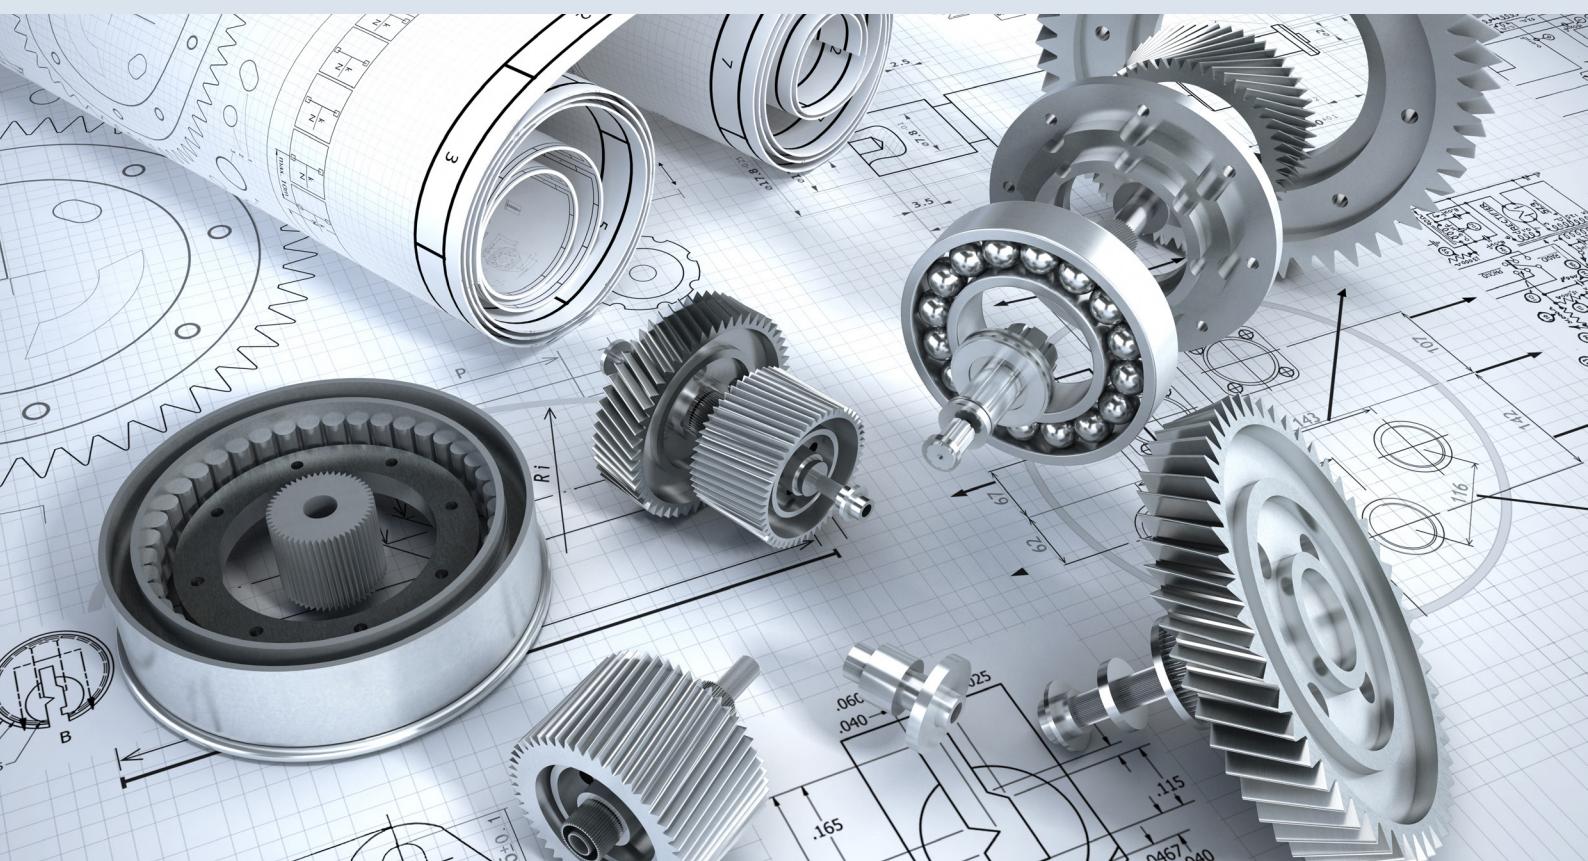

PERFORMANCE

EVOX COAXIAL GEARMOTOR

Tables introduction

P ₁ = 0.25 kW / 0.33 HP 4-POLE MOTORS · IE3 PREMIUM EFFICIENCY											
Power	50Hz			60Hz			i	Size	Stages	IEC Input	Compact EVOX Input
	n ₂	M ₂	S	n ₂	M ₂	S					
kW	HP	rpm	Nm	lb-in	rpm	Nm	lb-in	CP		BXN	MXN
0.25	0.33	126.1	19	168	2.9			10.6	07	2	P63
		117.0	21	186	2.7			11.5			S05
		99.9	24	212	2.3	126.4	19	168	2.9		
								13.4			

Number of poles Gear Unit data calculated @ indicated rpm in input and **50Hz** motor frequency Gear Unit data calculated @ indicated rpm in input and **60Hz** motor frequency Gear ratio Gear unit size Gear unit stages

Nominal motor output power Service factor: S = M_{n2}/M₂
You can see Mn2 in the Gear Unit Performance Table Output torque calculated with the indicated compact IE3/NEMA Premium motor Output speed calculated with the indicated compact IE3/NEMA Premium motor IEC Motor size Compact Motor size

Performance data are calculated at a temperature of 25°C, and altitude < 1000m.

Refer to the [Configuration Guidelines & Setup](#) section, before configuring the motor, to select the correct power.



PERFORMANCE

EVOX COAXIAL GEARMOTOR

Performance Table

P₁ = 0.12 kW / 0.16 HP 4-POLE MOTORS · IE3 PREMIUM EFFICIENCY											
Power	50 Hz			60 Hz			i	Size		IEC Input	Compact EVOX Input
	n ₂		M ₂	S	n ₂		M ₂	S	CP	Stages	
	kW	HP	rpm	Nm	lb-in	rpm	Nm	lb-in			BXN
0.12 0.16	62.5	18	159	3.0					22.5	07	3
	54.1	21	186	2.6					26.0		
	50.1	23	204	2.4	61.4	19	168	2.9	28.1		
	42.8	27	239	2.1	52.5	22	195	2.5	32.9		
	36.1	32	283	1.7	44.3	26	230	2.1	38.9		
	32.8	35	310	1.6	40.2	28	248	1.9	42.9		
	30.5	38	336	1.5	37.4	31	274	1.8	46.1		
	28.4	40	354	1.4	34.8	33	292	1.7	49.6		
	26.3	44	389	1.3	32.3	36	319	1.5	53.4		
	22.5	51	451	1.1	27.5	42	372	1.3	62.6		
	19.0	60	531	0.9	23.2	49	434	1.1	74.2		
					21.2	54	478	1.0	81.2		
	33.7	34	301	2.9					41.8	17	3
	28.9	40	354	2.5					48.7		
	26.8	43	381	2.3	32.9	35	310	2.9	52.4		
	24.9	46	407	2.2	30.5	38	336	2.7	56.6		
	21.3	54	478	1.9	26.0	44	389	2.3	66.2		
	17.9	64	566	1.6	22.0	52	460	1.9	78.4		
	16.4	70	620	1.4	20.1	57	504	1.8	85.9		
	16.8	68	602	2.9					83.6	37	3
	15.7	73	646	2.7					89.7		
	13.5	85	752	2.4	16.6	69	611	2.9	104.0		
	11.5	99	876	2.0	14.1	81	717	2.5	122.1		
	10.6	108	956	1.8	12.9	89	788	2.3	133.2		
	8.9	129	1142	2.6					158.0	47	3
	8.2	140	1239	2.4	10.0	114	1009	2.9	171.9		

P₁ = 0.18 kW / 0.25 HP

4-POLE MOTORS · IE3 PREMIUM EFFICIENCY



Power	50 Hz			60 Hz			i	Size		IEC Input	Compact EVOX Input
	n ₂		M ₂	S	n ₂		M ₂	S	CP	Stages	
	kW	HP	rpm	Nm	lb-in	rpm	Nm	lb-in		BXN	MXN
0.18 0.25	86.4	20	177	2.8					15.9	07	2
	78.9	22	195	2.5					17.4		
	65.5	26	230	2.1	82.0	21	186	2.6	21.0		
	61.0	28	248	2.0	76.4	23	204	2.4	22.5		
	52.8	33	292	1.7	66.1	26	230	2.1	26.0		
	48.9	35	310	1.6	61.3	28	248	2.0	28.1		
	41.8	41	363	1.3	52.3	33	292	1.7	32.9		
	35.3	49	434	1.1	44.2	39	345	1.4	38.9		
	32.0	54	478	1.0	40.1	43	381	1.3	42.9		
	29.8	58	513	1.0	37.3	46	407	1.2	46.1		
					34.7	50	443	1.1	49.6		
					32.2	53	469	1.0	53.4		
	50.4	34	301	2.9					27.2	17	3
	43.9	39	345	2.6					31.2		
	38.1	45	398	2.2	47.7	36	319	2.8	36.0		
	35.4	49	434	2.1	44.3	39	345	2.6	38.8		
	32.8	52	460	1.9	41.1	42	372	2.4	41.8		
	28.2	61	540	1.6	35.3	49	434	2.1	48.7		
	26.2	66	584	1.5	32.8	52	460	1.9	52.4		
	24.3	71	628	1.4	30.4	57	504	1.8	56.6		
	20.7	83	735	1.2	26.0	66	584	1.5	66.2		
	17.5	98	867	1.0	21.9	78	690	1.3	78.4		
	16.0	108	956	0.9	20.0	86	761	1.2	85.9		
	25.6	67	593	3.0					53.6	37	3
	23.6	73	646	2.7					58.2		
	22.7	76	673	2.6					60.4		
	20.1	86	761	2.3	25.1	68	602	2.9	68.5		
	18.8	91	805	2.2	23.5	73	646	2.7	73.0		
	16.4	105	929	1.9	20.6	84	743	2.4	83.6		
	15.3	112	991	1.8	19.2	90	797	2.2	89.7		
	13.2	130	1151	1.5	16.5	104	920	1.9	104.0		
	11.2	153	1354	1.3	14.1	122	1080	1.6	122.1		
	10.3	167	1478	1.2	12.9	133	1177	1.5	133.2		
	15.2	113	1000	3.0					90.4	47	3
	14.3	120	1062	2.8					96.1		
	12.6	137	1213	2.4					109.4		
	11.7	147	1301	2.3	14.7	117	1036	2.9	117.1		
	10.2	169	1496	2.0	12.7	135	1195	2.5	135.1		
	8.7	198	1752	1.7	10.9	158	1398	2.1	158.0		
	8.0	215	1903	1.6	10.0	172	1522	1.9	171.9		



PERFORMANCE

EVOX COAXIAL GEARMOTOR

Performance Table

P ₁ = 0.25 kW / 0.33 HP											
4-POLE MOTORS · IE3 PREMIUM EFFICIENCY											
Power	50 Hz			60 Hz			i	Size		IEC Input	Compact EVOX Input
	n ₂	M ₂	S	n ₂	M ₂	S		CP	Stages		
kW	HP	rpm	Nm	lb-in	rpm	Nm	lb-in			BNX	MXN
0.25 0.33	121.2	20	177	2.8	127.2	19	168	2.9	11.4	07	2
	103.5	23	204	2.4	107.4	22	195	2.5	13.4		
	87.3	27	239	2.0	98.1	24	212	2.3	15.9		
	79.8	30	266	1.8	66.2	36	319	1.5	17.4		
	66.2	36	319	1.5	81.3	29	257	1.9	21.0		
	61.7	39	345	1.4	75.8	31	274	1.7	22.5		
	53.3	45	398	1.2	65.6	36	319	1.5	26.0		
	49.5	48	425	1.1	60.8	39	345	1.4	28.1		
	42.2	57	504	1.0	51.9	46	407	1.2	32.9		
					43.8	54	478	1.0	38.9		
					39.8	60	531	0.9	42.9		
	70.4	34	301	2.9					19.7	17	2
	60.0	40	354	2.5					23.2		
	55.0	43	381	2.3	67.6	35	310	2.8	25.2		
	51.0	47	416	2.1	62.6	38	336	2.6	27.2		
	44.4	54	478	1.9	54.6	44	389	2.3	31.2		
	38.5	62	549	1.6	47.3	50	443	2.0	36.0		
	35.8	67	593	1.5	44.0	54	478	1.8	38.8		
	33.2	72	637	1.4	40.8	59	522	1.7	41.8		
	28.5	84	743	1.2	35.0	68	602	1.5	48.7		
	26.5	90	797	1.1	32.5	73	646	1.4	52.4		
	24.5	97	859	1.0	30.2	79	699	1.3	56.6		
					25.8	93	823	1.1	66.2		
					21.7	110	974	0.9	78.4		
	33.9	70	620	2.8					40.9	37	3
	29.7	80	708	2.5					46.8		
	27.6	86	761	2.3	34.0	70	620	2.8	50.2		
	25.9	92	814	2.2	31.8	75	664	2.7	53.6		
	23.8	100	885	2.0	29.3	81	717	2.5	58.2		
	23.0	104	920	1.9	28.2	85	752	2.4	60.4		
	20.3	118	1044	1.7	24.9	96	850	2.1	68.5		
	19.0	126	1115	1.6	23.4	102	903	2.0	73.0		
	16.6	144	1275	1.4	20.4	117	1036	1.7	83.6		
	15.5	154	1363	1.3	19.0	125	1106	1.6	89.7		
	13.3	179	1584	1.1	16.4	146	1292	1.4	104.0		
	11.4	210	1859	1.0	14.0	171	1513	1.2	122.1		
					12.8	186	1646	1.1	133.2		
	19.4	123	1089	2.7					71.6	47	3
	17.3	138	1221	2.4	21.3	112	991	3.0	80.2		
	15.4	155	1372	2.2	18.9	126	1115	2.6	90.4		
	14.4	165	1460	2.0	17.7	135	1195	2.5	96.1		
	12.7	188	1664	1.8	15.6	153	1354	2.2	109.4		
	11.9	201	1779	1.7	14.6	164	1452	2.0	117.1		
	10.3	232	2053	1.4	12.6	189	1673	1.8	135.1		
	8.8	272	2407	1.2	10.8	221	1956	1.5	158.0		
	8.1	296	2620	1.1	9.9	241	2133	1.4	171.9		

P₁ = 0.37 kW / 0.50 HP

4-POLE MOTORS · IE3 PREMIUM EFFICIENCY



Power	50 Hz						60 Hz						i	Size	Stages	IEC Input	Compact EVOX Input			
	n ₂			M ₂			n ₂			M ₂										
	kW	HP	rpm	Nm	lb-in		rpm	Nm	lb-in		rpm	Nm	lb-in				CP			
0.37 0.50	206.7	17	150	2.9										6.9	07	2	71MB	10MB		
	188.9	19	168	2.7										7.5						
	177.6	20	177	2.8										8.0						
	154.5	23	204	2.4			188.4	19	168	2.9				9.2						
	143.8	25	221	2.2			175.4	20	177	2.7				9.9						
	133.6	26	230	2.1			163.0	22	195	2.5				10.6						
	123.9	29	257	1.9			151.1	23	204	2.4				11.4						
	105.8	33	292	1.6			129.1	27	239	2.0				13.4						
	89.3	40	354	1.4			108.9	32	283	1.7				15.9						
	81.6	43	381	1.3			99.5	36	319	1.5				17.4						
	67.7	52	460	1.1			82.5	43	381	1.3				21.0	07	3	71MB	10MB		
	63.1	56	496	1.0			76.9	46	407	1.2				22.5						
							66.5	53	469	1.0				26.0						
							61.7	57	504	1.0				28.1						
	102.5	34	301	2.9										13.8	17	2	71MB	10MB		
	89.6	39	345	2.5										15.8						
	83.5	42	372	2.4			101.9	35	310	2.9				17.0						
	72.0	49	434	2.0			87.8	40	354	2.5				19.7						
	61.3	58	513	1.7			74.8	47	416	2.1				23.2						
	56.2	63	558	1.6			68.6	51	451	1.9				25.2						
	52.1	68	602	1.5			63.5	56	496	1.8				27.2	17	3	71MB	10MB		
	45.4	78	690	1.3			55.4	64	566	1.6				31.2						
	39.4	90	797	1.1			48.0	74	655	1.4				36.0						
	36.6	97	859	1.0			44.6	79	699	1.3				38.8						
	33.9	104	920	1.0			41.4	85	752	1.2				41.8						
							35.5	99	876	1.0				48.7						
							33.0	107	947	0.9				52.4						
	47.3	75	664	2.7										30.0	37	3	71MB	10MB		
	41.9	84	743	2.4			51.2	69	611	2.9				33.8						
	37.0	95	841	2.1			45.1	78	690	2.6				38.3						
	34.7	102	903	2.0			42.3	84	743	2.4				40.9						
	30.3	117	1036	1.7			37.0	96	850	2.1				46.8						
	28.3	125	1106	1.6			34.5	102	903	2.0				50.2						
	26.5	133	1177	1.5			32.3	109	965	1.8				53.6						
	24.4	145	1283	1.4			29.7	119	1053	1.7				58.2						
	23.5	150	1328	1.3			28.6	123	1089	1.6				60.4						
	20.7	170	1505	1.2			25.3	140	1239	1.4				68.5						
	19.4	182	1611	1.1			23.7	149	1319	1.3				73.0						
	17.0	208	1841	1.0			20.7	171	1513	1.2				83.6						
							19.3	183	1620	1.1				89.7						
							16.6	212	1876	0.9				104.0						



PERFORMANCE

EVOX COAXIAL GEARMOTOR

Performance Table

P₁ = 0.37 kW / 0.50 HP												
4-POLE MOTORS · IE3 PREMIUM EFFICIENCY												
Power		50 Hz			60 Hz			i	Size	Stages	IEC Input	Compact EVOX Input
kW	HP	rpm	Nm	lb-in	rpm	Nm	lb-in					
0.37 0.50	33.7	105	929	3.0				42.1	47	3	71MB	10MB
	29.6	119	1053	2.8				47.9				
	27.7	128	1133	2.6				51.3				
	25.6	138	1221	2.2	31.2	113	1000	2.7				
	23.4	151	1336	2.2	28.5	124	1097	2.7				
	19.8	178	1575	1.9	24.2	146	1292	2.3				
	17.7	200	1770	1.7	21.6	164	1452	2.0				
	15.7	225	1991	1.5	19.2	184	1629	1.8				
	14.8	239	2115	1.4	18.0	196	1735	1.7				
	13.0	272	2407	1.2	15.8	223	1974	1.5				
	12.1	291	2576	1.1	14.8	239	2115	1.4				
	10.5	336	2974	1.0	12.8	276	2443	1.2				
					11.0	323	2859	1.0				
					10.1	351	3107	1.0				
								171.9				

P₁ = 0.55 kW / 0.75 HP												
4-POLE MOTORS · IE3 PREMIUM EFFICIENCY												
Power		50 Hz			60 Hz			i	Size	Stages	IEC Input	Compact EVOX Input
kW	HP	rpm	Nm	lb-in	rpm	Nm	lb-in					
0.55 0.75	191.7	27	239	2.9				7.6	17	2	80MA	20MA
	169.6	31	274	2.9				8.5				
	142.6	37	327	2.6				10.2				
	126.4	42	372	2.4	153.3	34	301	2.9				
	111.5	47	416	2.1	135.2	39	345	2.6				
	104.6	50	443	2.0	126.8	41	363	2.4				
	91.4	57	504	1.7	110.8	47	416	2.1				
	85.2	62	549	1.6	103.3	51	451	2.0				
	53.1	99	876	1.0	64.4	82	726	1.2				
					56.2	94	832	1.1				
					48.7	108	956	0.9				
	75.1	70	620	2.9				19.3				
	48.2	109	965	1.8	58.5	90	797	2.2				
	42.8	123	1089	1.6	51.9	101	894	2.0				
	37.7	139	1230	1.4	45.8	115	1018	1.7				
	35.4	148	1310	1.3	42.9	122	1080	1.6				
	30.9	170	1505	1.2	37.5	140	1239	1.4				
	28.8	182	1611	1.1	35.0	150	1328	1.3				
	27.0	194	1717	1.0	32.8	160	1416	1.2				



P₁ = 0.55 kW / 0.75 HP

4-POLE MOTORS · IE3 PREMIUM EFFICIENCY



Power	50 Hz			60 Hz			i	Size	Stages	IEC Input	Compact EVOX Input
	n ₂	M ₂	S	n ₂	M ₂	S					
kW HP	rpm	Nm lb-in		rpm	Nm lb-in			CP		BXN	MXN
0.55 0.75	23.9	219 1938	0.9	29.0	181 1602	1.1	60.4	37	3	80MA	20MA
				25.6	205 1814	1.0	68.5				
				24.0	219 1938	0.9	73.0				
	54.3	97 859	3.0				26.6	47	3	80MA	20MA
	46.1	114 1009	2.7				31.4				
	41.2	128 1133	2.4	49.9	105 929	2.8	35.2				
	36.5	144 1275	2.2	44.3	119 1053	2.6	39.6				
	34.3	153 1354	2.0	41.7	126 1115	2.5	42.1				
	30.2	174 1540	1.9	36.6	143 1266	2.3	47.9				
	28.2	186 1646	1.8	34.2	154 1363	2.2	51.3				
	26.1	201 1779	1.5	31.7	166 1469	1.9	55.4				
	23.8	221 1956	1.5	28.9	182 1611	1.8	60.8				
	20.2	260 2301	1.3	24.5	214 1894	1.6	71.6				
	18.0	291 2576	1.2	21.9	240 2124	1.4	80.2				
	16.0	328 2903	1.0	19.4	270 2390	1.2	90.4				
	15.1	349 3089	1.0	18.3	288 2549	1.2	96.1				
				16.0	327 2894	1.0	109.4				
				15.0	350 3098	1.0	117.1				

P₁ = 0.75 kW / 1.0 HP

4-POLE MOTORS · IE3 PREMIUM EFFICIENCY



Power	50 Hz			60 Hz			i	Size	Stages	IEC Input	Compact EVOX Input
	n ₂	M ₂	S	n ₂	M ₂	S					
kW HP	rpm	Nm lb-in		rpm	Nm lb-in			CP		BXN	MXN
0.75 1.00	321.7	22 195	2.9				4.5	17	2	80MB	20MB
	285.1	25 221	2.8				5.1				
	251.9	28 248	2.6				5.8				
	235.9	30 266	2.5	285.7	25 221	3.0	6.2				
	206.1	35 310	2.3	249.6	29 257	2.8	7.0				
	192.2	37 327	2.1	232.7	31 274	2.6	7.6				
	170.1	42 372	2.1	206.0	35 310	2.6	8.5				
	143.0	50 443	1.9	173.1	41 363	2.3	10.2				
	126.7	57 504	1.8	153.4	47 416	2.1	11.4				
	111.8	64 566	1.6	135.4	53 469	1.9	13.0				
	104.8	68 602	1.5	127.0	56 496	1.8	13.8				
	91.6	78 690	1.3	110.9	65 575	1.5	15.8				
	85.4	84 743	1.2	103.4	69 611	1.4	17.0				



PERFORMANCE

EVOX COAXIAL GEARMOTOR

Performance Table

P₁ = 0.75 kW / 1.0 HP 4-POLE MOTORS · IE3 PREMIUM EFFICIENCY											
Power	50 Hz			60 Hz			i	Size	Stages	IEC Input	Compact EVOX Input
	n ₂	M ₂	S	n ₂	M ₂	S					
kW	HP	rpm	Nm	lb-in	rpm	Nm	lb-in	CP	3	BXN	MXN
0.75 1.00					64.5	111	982	0.9	27.2	17	
	123.2	58	513	3.0					11.8	37	2
	109.9	65	575	2.8					13.2		
	91.7	78	690	2.5	111.1	64	566	3.0	15.8		
	80.6	89	788	2.3	97.6	73	646	2.7	18.0		
	75.3	95	841	2.1	91.2	79	699	2.5	19.3		
	48.4	148	1310	1.4	58.6	122	1080	1.6	30.0	37	3
	42.9	167	1478	1.2	51.9	138	1221	1.4	33.8		
	37.8	189	1673	1.1	45.8	156	1381	1.3	38.3		
	35.5	202	1788	1.0	42.9	167	1478	1.2	40.9		
					37.5	191	1690	1.0	46.8		
					35.0	205	1814	1.0	50.2		
					32.8	218	1929	0.9	53.6		
	68.2	105	929	3.0					21.3	47	2
	63.9	112	991	2.8					22.7		
	59.7	120	1062	2.3	72.3	99	876	2.7	24.3	47	3
	54.5	131	1159	2.2	66.0	109	965	2.5	26.6		
	46.3	155	1372	2.0	56.0	128	1133	2.2	31.4		
	41.3	174	1540	1.8	50.0	143	1266	2.1	35.2		
	36.6	195	1726	1.6	44.4	161	1425	1.9	39.6		
	34.4	208	1841	1.5	41.7	172	1522	1.8	42.1		
	30.3	237	2098	1.4	36.6	195	1726	1.7	47.9		
	28.3	253	2239	1.3	34.2	209	1850	1.6	51.3		
	26.2	274	2425	1.1	31.7	226	2000	1.4	55.4		
	23.9	300	2655	1.1	28.9	248	2195	1.4	60.8		
	20.3	353	3124	0.9	24.5	292	2584	1.1	71.6		
					21.9	327	2894	1.0	80.2		
					19.4	368	3257	0.9	90.4		

P₁ = 1.1 kW / 1.50 HP

4-POLE MOTORS · IE3 PREMIUM EFFICIENCY



Power	50 Hz			60 Hz			i	Size	Stages	IEC Input	Compact EVOX Input
	n ₂	M ₂	S	n ₂	M ₂	S					
kW HP	rpm	Nm lb-in		rpm	Nm lb-in						
1.1 1.50	339.1	31 274	2.8				4.3	37	2	90S	25S
	225.2	47 416	2.8				6.4				
	184.9	57 504	2.4	224.0	47 416	2.7	7.8				
	144.8	73 646	2.2	175.4	60 531	2.7	10.0				
	122.9	85 752	2.0	148.9	71 628	2.5	11.8				
	109.7	96 850	1.9	132.9	79 699	2.3	13.2				
	91.5	115 1018	1.7	110.9	95 841	2.0	15.8				
	80.4	131 1159	1.5	97.4	108 956	1.9	18.0				
	75.2	140 1239	1.4	91.1	115 1018	1.7	19.3				
	48.3	218 1929	0.9	58.5	180 1593	1.1	30.0	37	3	90S	25S
				51.8	203 1797	1.0	33.8				
	181.9	58 513	2.9				8.0	47	2	90S	25S
	119.2	88 779	2.8				12.2				
	102.1	103 912	2.6				14.2				
	91.6	115 1018	2.4	111.0	95 841	2.9	15.8				
	81.8	128 1133	2.3	99.1	106 938	2.7	17.7				
	77.1	136 1204	2.2	93.4	112 991	2.6	18.8				
	68.1	154 1363	2.0	82.5	127 1124	2.4	21.3				
	63.8	165 1460	1.9	77.2	136 1204	2.3	22.7				
	59.6	176 1558	1.6	72.2	145 1283	1.8	24.3	47	3	90S	25S
	54.4	193 1708	1.5	65.9	159 1407	1.7	26.6				
	46.2	228 2018	1.4	55.9	188 1664	1.5	31.4				
	41.2	255 2257	1.2	49.9	211 1868	1.4	35.2				
	36.6	287 2540	1.1	44.3	237 2098	1.3	39.6				
	34.4	306 2708	1.0	41.6	252 2230	1.2	42.1				
	30.2	348 3080	0.9	36.6	287 2540	1.1	47.9				
	28.2	372 3292	0.9	34.2	307 2717	1.1	51.3				
				31.6	332 2938	0.9	55.4				
				28.9	364 3222	0.9	60.8				

PERFORMANCE

EVOX COAXIAL GEARMOTOR

Performance Table

P₁ = 1.5 kW / 2.00 HP
4-POLE MOTORS · IE3 PREMIUM EFFICIENCY




Power	50 Hz			60 Hz			i	Size	Stages	IEC Input	Compact EVOX Input
	n ₂	M ₂	S	n ₂	M ₂	S					
kW HP	rpm	Nm lb-in		rpm	Nm lb-in						
1.5 2.00	640.4	22 195	3.0				2.2	37	2	90L	25L
	533.7	27 239	2.7				2.7				
	453.1	32 283	2.5	550.3	26 230	2.8	3.2				
	423.8	34 301	3.0				3.4				
	354.9	40 354	2.7				4.1				
	337.5	42 372	2.0	409.8	35 310	2.3	4.3				
	301.5	48 425	2.5	366.1	39 345	2.8	4.8				
	268.8	53 469	2.3	326.5	44 389	2.6	5.4				
	224.1	64 566	2.0	272.2	53 469	2.3	6.4				
	184.0	78 690	1.7	223.5	64 566	2.0	7.8				
	144.1	99 876	1.6	175.0	82 726	2.0	10.0				
	122.3	117 1036	1.5	148.6	96 850	1.8	11.8				
	109.2	131 1159	1.4	132.6	108 956	1.7	13.2				
	91.1	157 1390	1.2	110.6	129 1142	1.5	15.8				
	80.1	179 1584	1.1	97.2	147 1301	1.4	18.0				
	74.8	191 1690	1.0	90.9	158 1398	1.3	19.3				
	480.3	30 266	2.8				3.0	47	2	90L	25L
	432.7	33 292	2.7				3.3				
	292.9	49 434	2.8				4.9				
	263.4	54 478	2.7				5.5				
	225.9	63 558	2.5	274.3	52 460	2.8	6.4				
	202.7	71 628	2.3	246.1	58 513	2.6	7.1				
	181.0	79 699	2.1	219.8	65 575	2.4	8.0				
	167.8	85 752	2.5				8.6				
	148.9	96 850	2.3	180.8	79 699	2.8	9.7				
	131.7	109 965	2.3	160.0	90 797	2.7	10.9				
	118.6	121 1071	2.1	144.0	99 876	2.5	12.2				
	101.6	141 1248	1.9	123.4	116 1027	2.3	14.2				
	91.2	157 1390	1.8	110.8	129 1142	2.1	15.8				
	81.4	176 1558	1.6	98.9	145 1283	2.0	17.7				
	76.7	187 1655	1.6	93.2	154 1363	1.9	18.8				
	67.7	211 1868	1.5	82.3	174 1540	1.8	21.3				
	63.5	226 2000	1.4	77.1	186 1646	1.7	22.7				
	59.3	241 2133	1.2	72.0	199 1761	1.3	24.3	47	3	90L	25L
	54.1	265 2345	1.1	65.7	218 1929	1.2	26.6				
	45.9	312 2761	1.0	55.8	257 2275	1.1	31.4				
				49.8	288 2549	1.0	35.2				
				44.2	324 2868	1.0	39.6				

P₁ = 2.2 kW / 3.00 HP

4-POLE MOTORS · IE3 PREMIUM EFFICIENCY



Power kW HP	50 Hz			60 Hz			i	Size CP	Stages	IEC Input BXN	Compact EVOX Input MXN
	n ₂	M ₂	S	n ₂	M ₂	S					
2.2 3.0	617.8	34 301	2.9				2.4	47	2	100LA	30LA
	486.0	43 381	2.7				3.0				
	437.8	48 425	2.8				3.3				
	377.7	56 496	2.7				3.9				
	335.2	63 558	2.6				4.3				
	296.3	71 628	2.4	358.7	59 522	2.9	4.9				
	266.5	79 699	2.3	322.7	65 575	2.8	5.5				
	228.5	92 814	2.1	276.6	76 673	2.5	6.4				
	205.1	102 903	2.0	248.2	85 752	2.4	7.1				
	183.2	115 1018	1.8	221.7	95 841	2.2	8.0				
	169.7	124 1097	1.7	205.5	102 903	2.1	8.6				
	150.6	139 1230	1.6	182.3	115 1018	2.0	9.7				
	133.3	158 1398	1.6	161.3	130 1151	1.9	10.9				
	120.0	175 1549	1.4	145.3	145 1283	1.7	12.2				
	102.8	204 1806	1.3	124.5	169 1496	1.6	14.2				
	92.3	228 2018	1.2	111.7	188 1664	1.5	15.8				
	82.4	255 2257	1.1	99.7	211 1868	1.4	17.7				
				72.7	289 2558	0.9	24.3	47	3	100LA	30LA

PERFORMANCE

EVOX COAXIAL GEARMOTOR

Performance Table

P₁ = 3.0 kW / 4.0 HP 4-POLE MOTORS · IE3 PREMIUM EFFICIENCY												
Power		50 Hz			60 Hz			i	Size	Stages	IEC Input	Compact EVOX Input
kW	HP	n ₂	M ₂	S	n ₂	M ₂	S					
3.0	4.0	rpm	Nm	lb-in	rpm	Nm	lb-in	CP	47	2	BXN	MXN
615.3	47	416	2.1		746.2	38	336	2.4	2.4			
484.0	59	522	1.9		587.0	49	434	2.3	3.0			
436.0	66	584	2.1		528.8	54	478	2.3	3.3			
376.2	76	673	2.0		456.2	63	558	2.4	3.9			
333.8	86	761	1.9		404.8	71	628	2.3	4.3			
295.1	97	859	1.8		357.9	80	708	2.1	4.9			
265.4	108	956	1.7		321.9	89	788	2.0	5.5			
227.6	126	1115	1.5		276.0	104	920	1.8	6.4			
204.2	140	1239	1.4		247.7	116	1027	1.7	7.1			
182.4	157	1390	1.3		221.2	129	1142	1.6	8.0			
169.0	169	1496	1.3		205.0	140	1239	1.5	8.6			
150.0	191	1690	1.2		181.9	157	1390	1.4	9.7			
132.7	216	1912	1.1		161.0	178	1575	1.4	10.9			
119.5	240	2124	1.0		144.9	198	1752	1.3	12.2			
102.4	280	2478	0.9		124.2	231	2045	1.1	14.2			
					111.5	257	2275	1.1	15.8			
					99.5	288	2549	1.0	17.7			

P₁ = 4.0 kW / 5.5 HP

4-POLE MOTORS · IE3 PREMIUM EFFICIENCY



Power kW HP	50 Hz			60 Hz			i	Size CP	Stages	IEC Input BXN	Compact EVOX Input MXN
	n ₂	M ₂	S	n ₂	M ₂	S					
4.0 5.5	615.7	62	549	1.6	746.6	47	416	2.0	2.4	47	2
	484.3	79	699	1.5	587.3	60	531	1.8	3.0		
	436.3	88	779	1.5	529.1	67	593	1.9	3.3		
	376.4	101	894	1.5	456.5	77	682	1.9	3.9		
	334.0	114	1009	1.4	405.1	87	770	1.8	4.3		
	295.3	129	1142	1.3	358.1	99	876	1.7	4.9		
	265.6	144	1275	1.3	322.1	110	974	1.6	5.5		
	227.7	168	1487	1.1	276.2	128	1133	1.5	6.4		
	204.4	187	1655	1.1	247.8	143	1266	1.4	7.1		
	182.5	209	1850	1.0	221.4	160	1416	1.3	8.0		
	169.2	226	2000	1.0	205.1	172	1522	1.2	8.6		
					182.0	194	1717	1.2	9.7		
					161.1	219	1938	1.1	10.9		
					145.0	244	2160	1.0	12.2		
					124.3	284	2514	0.9	14.2		

PERFORMANCE

EVOX COAXIAL GEARMOTOR

Performance Table

P₁ = 0.12 kW / 0.16 HP											
4-POLE MOTORS · IE1 STANDARD EFFICIENCY											
Power	50 Hz			60 Hz			i	Size		IEC Input	Compact EVOX Input
	kW	HP	n ₂ rpm	M ₂ Nm	S lb-in			CP	Stages		
0.12 0.16	64.9	19	168	2.9			21.0	07	3		05MA
	60.5	20	177	2.7			22.5				
	52.3	23	204	2.3			26.0				
	48.5	25	221	2.2	60.0	19 168	2.9	28.1			
	41.5	30	266	1.9	51.2	22 195	2.5	32.9			
	35.0	35	310	1.6	43.3	26 230	2.1	38.9			
	31.8	39	345	1.4	39.3	29 257	1.9	42.9			
	29.6	41	363	1.3	36.6	31 274	1.8	46.1			
	27.5	45	398	1.2	34.0	34 301	1.6	49.6			
	25.5	48	425	1.1	31.5	36 319	1.5	53.4			
	21.8	56	496	1.0	26.9	43 381	1.3	62.6			
					22.7	50 443	1.1	74.2			
					20.7	55 487	1.0	81.2			
	35.1	35	310	2.9			38.8	17	3		05MA
	32.6	38	336	2.7			41.8				
	27.9	44	389	2.3			48.7				
	26.0	47	416	2.1	32.1	36 319	2.8	52.4			
	24.1	51	451	2.0	29.8	38 336	2.6	56.6			
	20.6	60	531	1.7	25.4	45 398	2.2	66.2			
	17.4	71	628	1.4	21.5	53 469	1.9	78.4			
	15.9	77	682	1.3	19.6	58 513	1.7	85.9			
	16.3	75	664	2.7			83.6	37	3		05MA
	15.2	81	717	2.5			89.7				
	13.1	94	832	2.1	16.2	71 628	2.8	104.0			
	11.2	110	974	1.8	13.8	83 735	2.4	122.1			
	10.2	120	1062	1.7	12.6	91 805	2.2	133.2			
	10.1	122	1080	2.8			135.1	47	3		05MA
	8.6	142	1257	2.4			158.0				
	7.9	155	1372	2.2	9.8	117 1036	2.9	171.9			

P₁ = 0.18 kW / 0.25 HP

4-POLE MOTORS · IE1 STANDARD EFFICIENCY



Power kW HP	50 Hz			60 Hz			i	Size CP	Stages	IEC Input	Compact EVOX Input MNN
	n ₂ rpm	M ₂ Nm	S lb-in	n ₂ rpm	M ₂ Nm	S lb-in					
	kW 79.0	HP 21	186	2.7	kW 72.2	HP 23	204	2.4			
0.18 0.25	59.9	27	239	2.0	79.0	22	195	2.5	15.9	07	2
	55.8	29	257	1.9	73.7	23	204	2.4	17.4		
	48.3	34	301	1.6	63.7	27	239	2.0	21.0		
	44.8	36	319	1.5	59.1	29	257	1.9	22.5		
	38.2	43	381	1.3	50.5	34	301	1.6	26.0		
	32.3	51	451	1.1	42.6	40	354	1.4	28.1		
	29.3	56	496	1.0	38.7	44	389	1.2	32.9		
	27.3	60	531	0.9	36.0	48	425	1.2	38.9		
					33.4	51	451	1.1	42.9		
					31.0	55	487	1.0	46.1		
									49.6		
									53.4		
	46.1	35	310	2.8					27.2	17	3
	40.2	41	363	2.5					31.2		
	34.9	47	416	2.1	46.0	37	327	2.7	36.0		
	32.4	50	443	2.0	42.8	40	354	2.5	38.8		
	30.0	54	478	1.8	39.7	43	381	2.3	41.8		
	25.8	63	558	1.6	34.0	51	451	2.0	48.7		
	24.0	68	602	1.5	31.6	54	478	1.8	52.4		
	22.2	74	655	1.4	29.3	59	522	1.7	56.6		
	19.0	86	761	1.2	25.0	69	611	1.5	66.2		
	16.0	102	903	1.0	21.1	81	717	1.2	78.4		
					19.3	89	788	1.1	85.9		
	23.4	70	620	2.9					53.6	37	3
	21.6	76	673	2.6					58.2		
	20.8	79	699	2.5					60.4		
	18.3	89	788	2.2	24.2	71	628	2.8	68.5		
	17.2	95	841	2.1	22.7	76	673	2.6	73.0		
	15.0	109	965	1.8	19.8	87	770	2.3	83.6		
	14.0	117	1036	1.7	18.5	93	823	2.2	89.7		
	12.1	135	1195	1.5	15.9	108	956	1.9	104.0		
	10.3	159	1407	1.3	13.6	127	1124	1.6	122.1		
	9.4	173	1531	1.2	12.5	138	1221	1.4	133.2		
0.13 0.17	13.9	117	1036	2.9					90.4	47	3
	13.1	125	1106	2.7					96.1		
	11.5	142	1257	2.4	15.2	113	1000	3.0	109.4		
	10.7	152	1345	2.2	14.2	121	1071	2.8	117.1		
	9.3	176	1558	1.9	12.3	140	1239	2.4	135.1		
	7.9	205	1814	1.6	10.5	164	1452	2.0	158.0		
	7.3	223	1974	1.5	9.6	178	1575	1.9	171.9		

PERFORMANCE

EVOX COAXIAL GEARMOTOR

Performance Table

P ₁ = 0.25 kW / 0.33 HP											
4-POLE MOTORS · IE1 STANDARD EFFICIENCY											
Power	50 Hz			60 Hz			i	Size		IEC Input	Compact EVOX Input
	kW	HP	n ₂	M ₂	S	rpm	Nm	lb-in	CP		
			rpm	Nm	lb-in					MNN	
0.25 0.33	124.0	19	168	2.9					10.6	07	2
	115.0	21	186	2.6					11.4		
	98.2	24	212	2.3	124.7	19	168	2.9	13.4		
	82.9	29	257	1.9	105.2	23	204	2.4	15.9		
	75.7	32	283	1.7	96.1	25	221	2.2	17.4		
	62.8	38	336	1.4	79.7	30	266	1.8	21.0		05MC
	58.5	41	363	1.3	74.3	32	283	1.7	22.5		
	50.6	47	416	1.2	64.2	37	327	1.5	26.0		
	46.9	51	451	1.1	59.6	40	354	1.4	28.1		
	40.1	60	531	0.9	50.9	47	416	1.2	32.9		
					42.9	56	496	1.0	38.9		
	66.8	36	319	2.8					19.7	17	2
	56.9	42	372	2.4					23.2		
	52.2	46	407	2.2	66.3	36	319	2.8	25.2		
	48.3	49	434	2.0	61.4	39	345	2.6	27.2		05MC
	42.1	57	504	1.8	53.5	45	398	2.2	31.2		
	36.6	65	575	1.5	46.4	51	451	1.9	36.0		
	34.0	70	620	1.4	43.1	55	487	1.8	38.8		
	31.5	76	673	1.3	40.0	60	531	1.7	41.8		
	27.0	88	779	1.1	34.3	70	620	1.4	48.7		
	25.1	95	841	1.1	31.9	75	664	1.3	52.4		
	23.3	103	912	1.0	29.6	81	717	1.2	56.6		
					25.3	95	841	1.1	66.2		
	34.4	69	611	2.9					38.3	37	3
	32.2	74	655	2.7					40.9		
	28.1	85	752	2.4	35.7	67	593	3.0	46.8		
	26.2	91	805	2.2	33.3	72	637	2.8	50.2		
	24.6	97	859	2.1	31.2	76	673	2.6	53.6		
	22.6	106	938	1.9	28.7	83	735	2.4	58.2		
	21.8	110	974	1.8	27.7	86	761	2.3	60.4		
	19.2	124	1097	1.6	24.4	98	867	2.0	68.5		
	18.0	132	1168	1.5	22.9	104	920	1.9	73.0		
	15.8	151	1336	1.3	20.0	119	1053	1.7	83.6		
	14.7	163	1443	1.2	18.6	128	1133	1.6	89.7		
	12.7	189	1673	1.1	16.1	148	1310	1.3	104.0		
	10.8	221	1956	0.9	13.7	174	1540	1.1	122.1		
					12.6	190	1682	1.1	133.2		
	18.4	130	1151	2.6					71.6	47	3
	16.4	145	1283	2.3	20.8	115	1018	2.9	80.2		
	14.6	164	1452	2.0	18.5	129	1142	2.6	90.4		

P₁ = 0.25 kW / 0.33 HP

4-POLE MOTORS · IE1 STANDARD EFFICIENCY



Power kW HP	50 Hz			60 Hz			i	Size CP	Stages	IEC Input	Compact EVOX Input MNN
	n ₂ rpm	M ₂ Nm	S lb-in	n ₂ rpm	M ₂ Nm	S lb-in					
	kW	HP									
0.25 0.33	13.7	174	1540	1.9	17.4	137	1213	2.4	96.1	47	3
	12.0	198	1752	1.7	15.3	156	1381	2.1	109.4		
	11.3	212	1876	1.6	14.3	167	1478	2.0	117.1		
	9.7	245	2168	1.4	12.4	193	1708	1.7	135.1		
	8.3	286	2531	1.2	10.6	226	2000	1.5	158.0		
	7.7	312	2761	1.1	9.7	245	2168	1.4	171.9		
	129.4	18	159	3.0					10.6		07
	120.0	20	177	2.8					11.4		
	102.5	23	204	2.4	126.5	19	168	2.9	13.4		
	86.5	28	248	2.0	106.7	22	195	2.5	15.9		
	79.0	30	266	1.8	97.5	24	212	2.2	17.4		
0.25 0.33	65.6	36	319	1.5	80.9	30	266	1.9	21.0	07	3
	61.1	39	345	1.4	75.4	32	283	1.7	22.5		
	52.8	45	398	1.2	65.2	37	327	1.5	26.0		
	49.0	49	434	1.1	60.4	40	354	1.4	28.1		
	41.8	57	504	1.0	51.6	46	407	1.2	32.9		
					43.6	55	487	1.0	38.9		
					39.6	60	531	0.9	42.9		
	69.8	34	301	2.9					19.7		17
	59.4	40	354	2.5					23.2		
	54.5	44	389	2.3	67.2	36	319	2.8	25.2		
0.25 0.33	50.5	47	416	2.1	62.3	38	336	2.6	27.2	17	3
	44.0	54	478	1.8	54.3	44	389	2.3	31.2		
	38.2	63	558	1.6	47.1	51	451	2.0	36.0		
	35.5	67	593	1.5	43.7	55	487	1.8	38.8		
	32.9	73	646	1.4	40.6	59	522	1.7	41.8		
	28.2	85	752	1.2	34.8	69	611	1.5	48.7		
	26.2	91	805	1.1	32.3	74	655	1.4	52.4		
	24.3	98	867	1.0	30.0	80	708	1.3	56.6		
					25.6	93	823	1.1	66.2		
					21.6	110	974	0.9	78.4		
0.25 0.33	35.9	67	593	3.0					38.3	37	3
	33.6	71	628	2.8					40.9		
	29.4	81	717	2.5					46.8		
	27.4	87	770	2.3	33.8	71	628	2.8	50.2		
	25.7	93	823	2.2	31.7	75	664	2.7	53.6		
	23.6	101	894	2.0	29.1	82	726	2.4	58.2		
	22.8	105	929	1.9	28.1	85	752	2.4	60.4		
	20.1	119	1053	1.7	24.8	96	850	2.1	68.5		
	18.8	127	1124	1.6	23.2	103	912	1.9	73.0		



PERFORMANCE

EVOX COAXIAL GEARMOTOR

Performance Table

P₁ = 0.25 kW / 0.33 HP
4-POLE MOTORS · IE1 STANDARD EFFICIENCY




Power kW HP	50 Hz			60 Hz			i	Size CP	Stages 3	IEC Input	Compact EVOX Input MNN
	n ₂ rpm	M ₂ Nm	S lb-in	n ₂ rpm	M ₂ Nm	S lb-in					
0.25 0.33	16.5	145	1283	1.4	20.3	118	1044	1.7	83.6	37	3
	15.3	156	1381	1.3	18.9	126	1115	1.6	89.7		
	13.2	181	1602	1.1	16.3	146	1292	1.4	104.0		
	11.3	212	1876	0.9	13.9	172	1522	1.2	122.1		
					12.7	187	1655	1.1	133.2		
	19.2	124	1097	2.7					71.6	47	3
	17.1	139	1230	2.4	21.1	113	1000	3.0	80.2		
	15.2	157	1390	2.1	18.8	127	1124	2.6	90.4		
	14.3	167	1478	2.0	17.6	135	1195	2.5	96.1		
	12.6	190	1682	1.8	15.5	154	1363	2.2	109.4		
0.37 0.50	11.7	203	1797	1.6	14.5	165	1460	2.0	117.1	07	2
	10.2	235	2080	1.4	12.6	190	1682	1.8	135.1		
	8.7	274	2425	1.2	10.7	222	1965	1.5	158.0		
	8.0	298	2638	1.1	9.9	242	2142	1.4	171.9		

P₁ = 0.37 kW / 0.50 HP
4-POLE MOTORS · IE1 STANDARD EFFICIENCY




Power kW HP	50 Hz			60 Hz			i	Size CP	Stages 2	IEC Input	Compact EVOX Input MNN	
	n ₂ rpm	M ₂ Nm	S lb-in	n ₂ rpm	M ₂ Nm	S lb-in						
0.37 0.50	199.3	18	159	2.8				6.9	07	2	10MB	
	182.1	19	168	2.6				7.5				
	171.2	21	186	2.7				8.0				
	148.9	24	212	2.3	184.4	19	168	2.9				
	138.6	25	221	2.2	171.6	21	186	2.7				
	128.8	27	239	2.0	159.5	22	195	2.5	10.6	17	3	
	119.4	30	266	1.9	147.9	24	212	2.3	11.4			
	102.0	35	310	1.6	126.3	28	248	2.0	13.4			
	86.1	41	363	1.3	106.6	33	292	1.7	15.9			
	78.6	45	398	1.2	97.4	36	319	1.5	17.4			
0.55 0.75	65.2	54	478	1.0	80.8	44	389	1.3	21.0	07	3	10MB
	60.8	58	513	0.9	75.3	47	416	1.2	22.5			
					65.1	54	478	1.0	26.0			
					60.4	59	522	0.9	28.1			
	105.4	34	301	3.0				13.0	17	2	10MB	
	98.8	36	319	2.8				13.8				
	86.4	41	363	2.4				15.8				
	80.5	44	389	2.3	99.7	35	310	2.8	17.0			

P₁ = 0.37 kW / 0.50 HP

4-POLE MOTORS · IE1 STANDARD EFFICIENCY



Power kW HP	50 Hz			60 Hz			i	Size		IEC Input	Compact EVOX Input	
	n ₂ rpm	M ₂ Nm	S lb-in	n ₂ rpm	M ₂ Nm	S lb-in		CP	Stages			
	kW HP	Nm	lb-in	kW HP	Nm	lb-in			MNN			
0.37 0.50	69.4	51	451	2.0	85.9	41	363	2.4	19.7	17	2	10MB
	59.1	60	531	1.7	73.2	48	425	2.1	23.2			
	54.2	65	575	1.5	67.1	53	469	1.9	25.2			
	50.2	70	620	1.4	62.2	57	504	1.8	27.2	17	3	10MB
	43.8	81	717	1.2	54.2	65	575	1.5	31.2			
	38.0	93	823	1.1	47.0	75	664	1.3	36.0			
	35.3	100	885	1.0	43.7	81	717	1.2	38.8			
	32.7	108	956	0.9	40.5	87	770	1.1	41.8			
					34.8	102	903	1.0	48.7			
					32.3	109	965	0.9	52.4			
	52.6	67	593	3.0					26.0	37	2	10MB
	45.6	77	682	2.6					30.0	37	3	10MB
	40.4	87	770	2.3	50.1	71	628	2.8	33.8			
	35.7	99	876	2.0	44.2	80	708	2.5	38.3			
	33.4	106	938	1.9	41.4	85	752	2.3	40.9			
	29.2	121	1071	1.7	36.2	98	867	2.0	46.8			
	27.2	130	1151	1.5	33.7	105	929	1.9	50.2			
	25.5	138	1221	1.4	31.6	112	991	1.8	53.6			
	23.5	150	1328	1.3	29.1	121	1071	1.6	58.2			
	22.6	156	1381	1.3	28.0	126	1115	1.6	60.4			
	20.0	177	1567	1.1	24.7	143	1266	1.4	68.5			
	18.7	189	1673	1.1	23.2	152	1345	1.3	73.0			
	16.4	216	1912	0.9	20.3	174	1540	1.1	83.6			
					18.9	187	1655	1.1	89.7			
					16.3	217	1921	0.9	104.0			
	32.5	109	965	2.8					42.1	47	3	10MB
	28.5	124	1097	2.7					47.9			
	26.7	132	1168	2.5					51.3			
	24.7	143	1266	2.2	30.6	116	1027	2.7	55.4			
	22.5	157	1390	2.1	27.9	127	1124	2.6	60.8			
	19.1	185	1637	1.8	23.7	149	1319	2.2	71.6			
	17.1	207	1832	1.6	21.1	167	1478	2.0	80.2			
	15.1	233	2062	1.4	18.7	188	1664	1.8	90.4			
	14.2	248	2195	1.3	17.6	201	1779	1.7	96.1			
	12.5	283	2505	1.2	15.5	228	2018	1.5	109.4			
	11.7	302	2673	1.1	14.5	244	2160	1.4	117.1			
	10.1	349	3089	1.0	12.5	282	2496	1.2	135.1			
					10.7	330	2921	1.0	158.0			
					9.9	359	3177	0.9	171.9			



PERFORMANCE

EVOX COAXIAL GEARMOTOR

Performance Table

P ₁ = 0.55 kW / 0.75 HP												
4-POLE MOTORS · IE1 STANDARD EFFICIENCY												
Power	50 Hz			60 Hz			i	Size		Stages	IEC Input	Compact EVOX Input
	kW	HP	n ₂	M ₂	S	rpm	Nm	lb-in	CP			
			rpm	Nm	lb-in						MNN	
0.55 0.75	422.0	12	106	3.0					3.2	07	2	10MC
	394.2	13	115	3.0					3.4			
	342.8	15	133	2.6					4.0			
	296.4	18	159	2.5					4.6			
	274.9	19	168	2.4	341.4	15	133	2.9	5.0			
	234.8	22	195	2.2	291.6	18	159	2.8	5.8			
	198.1	27	239	1.9	246.1	21	186	2.3	6.9			
	181.0	29	257	1.8	224.8	23	204	2.2	7.5			
	170.2	31	274	1.8	211.4	25	221	2.2	8.0			
	148.1	35	310	1.6	183.9	29	257	1.9	9.2			
	137.8	38	336	1.4	171.1	31	274	1.8	9.9			
	128.0	41	363	1.3	159.0	33	292	1.7	10.6			
	118.7	44	389	1.2	147.5	36	319	1.5	11.4			
	101.4	52	460	1.1	125.9	42	372	1.3	13.4			
					106.3	49	434	1.1	15.9			
					97.1	54	478	1.0	17.4			
	193.2	27	239	2.9					7.0	17	2	10MC
	180.1	29	257	2.7					7.6			
	159.4	33	292	2.7					8.5			
	134.0	39	345	2.4	166.4	32	283	3.0	10.2			
	118.8	44	389	2.3	147.5	36	319	2.8	11.4			
	104.8	50	443	2.0	130.1	40	354	2.5	13.0			
	98.3	53	469	1.9	122.0	43	381	2.3	13.8			
	85.9	61	540	1.6	106.6	49	434	2.0	15.8			
	80.0	66	584	1.5	99.4	53	469	1.9	17.0			
	69.0	76	673	1.3	85.7	61	540	1.6	19.7			
	58.7	89	788	1.1	73.0	72	637	1.4	23.2			
	53.9	97	859	1.0	66.9	78	690	1.3	25.2			
	49.9	105	929	1.0	62.0	85	752	1.2	27.2	17	3	10MC
					54.0	97	859	1.0	31.2			
0.55 0.75	173.7	30	266	2.8					7.8	37	2	10MC
	150.6	35	310	2.6	187.0	28	248	3.0	9.0			
	128.8	41	363	2.3	159.9	33	292	2.6	10.6			
	75.6	70	620	2.9					18.0			
	70.6	74	655	2.7					19.3			
	61.2	86	761	2.3	75.9	69	611	2.9	22.2			
	52.3	100	885	2.0	65.0	81	717	2.5	26.0			
	45.3	116	1027	1.7	56.3	93	823	2.1	30.0	37	3	10MC
	40.2	131	1159	1.5	49.9	105	929	1.9	33.8			
	35.5	148	1310	1.4	44.1	119	1053	1.7	38.3			

P₁ = 0.55 kW / 0.75 HP

4-POLE MOTORS · IE1 STANDARD EFFICIENCY



Power kW HP	50 Hz			60 Hz			i	Size CP	Stages 3	IEC Input	Compact EVOX Input MNN
	n ₂	M ₂	S	n ₂	M ₂	S					
	rpm	Nm lb-in	rpm	Nm lb-in	rpm	Nm lb-in					
0.55 0.75	33.2	158 1398	1.3	41.3	127 1124	1.6	40.9	37	3	IEC Input	Compact EVOX Input MNN
	29.1	181 1602	1.1	36.1	146 1292	1.4	46.8				
	27.1	194 1717	1.0	33.6	156 1381	1.3	50.2				
	25.4	207 1832	1.0	31.5	167 1478	1.2	53.6				
				29.0	181 1602	1.1	58.2				
				27.9	188 1664	1.1	60.4				
				24.7	213 1885	0.9	68.5				
	63.9	82 726	3.0				21.3	47	2	IEC Input	Compact EVOX Input MNN
	59.9	88 779	2.8				22.7				
	52.1	101 894	2.5	64.7	81 717	3.0	26.1				
	44.8	117 1036	2.3	55.6	94 832	2.6	30.4				
	41.2	127 1124	2.1	51.2	103 912	2.5	33.0				
0.55 0.75	56.0	94 832	3.0				24.3	47	3	IEC Input	Compact EVOX Input MNN
	51.1	103 912	2.8				26.6				
	43.4	121 1071	2.6	53.8	98 867	2.9	31.4				
	38.7	136 1204	2.3	48.0	109 965	2.7	35.2				
	34.3	153 1354	2.0	42.7	123 1089	2.5	39.6				
	32.3	163 1443	1.9	40.1	131 1159	2.4	42.1				
	28.4	185 1637	1.8	35.2	149 1319	2.2	47.9				
	26.5	198 1752	1.7	32.9	160 1416	2.1	51.3				
	24.5	214 1894	1.4	30.5	172 1522	1.8	55.4				
	22.4	235 2080	1.4	27.8	189 1673	1.8	60.8				
	19.0	276 2443	1.2	23.6	223 1974	1.5	71.6				
	17.0	310 2744	1.1	21.1	249 2204	1.3	80.2				
	15.1	349 3089	1.0	18.7	281 2487	1.2	90.4				
	14.1	371 3284	0.9	17.6	299 2646	1.1	96.1				
				15.4	340 3009	1.0	109.4				
				14.4	364 3222	0.9	117.1				

PERFORMANCE

EVOX COAXIAL GEAR UNIT

Tables introduction

The following tables show geometrically possible combinations between gear ratios and inputs for each gear unit size.

For each of these combinations, a possible service factor has been calculated using the maximum motor power that can be coupled in Bonfiglioli's asynchronous electric motors portfolio (considering different poles and efficiency levels).

In the table, combinations with a service factor below 0.9 are highlighted with a lighter colour. Here you should pay attention to the power of the electric motor coupled with the gear unit, because it shouldn't exceed the "Maximum input power" shown.

The left table section shows the inputs that are geometrically compatible with each gear ratio by IEC, NEMA and solid input shaft. For further information on the input interface, see the Dimension section of this document.

EVOX CP17

Legend:

- Gear unit size
- Rated output torque [Service factor =1]
- Input speed
- Output speed gear unit performance data are calculated at 1400 rpm.
- Max input power [@ 1400rpm input & service factor =1]
- Nominal output torque ... Nm
- NEMA motor adapters size
- IEC motor adapters size
- Solid Shaft
- HS1/ NHS1
- Gear ratio
- Stage no.

Performance Data:

Stage no.	Gear ratio	[$n_1=1.400\text{rpm}$]			[$n_1=1.700\text{rpm}$]			Motor adapters								Size of the solid input shaft [Compatible with gear ratio]		
		Mn ₂	n ₂	Pn ₁	Mn ₂	n ₂	Pn ₁	IEC	P56	P63	P71	P80	P90	P100	P112		P132	
2 stages	24	45	583	2,7	373	708	4,2	-	-	-	N56C	N143TC	N145TC	N182TC	N184TC	N213TC	N215TC	HS1/ NHS1

- Adapter can be coupled
- Adapter can be coupled [Input power should not exceed the "Max input power"]
- Adapter can be coupled in NEMA version only. [Input power should not exceed the "Max Input power"]
- Adapter cannot be coupled

Please, configure N140TC, to have the N143TC or N145TC input flange; or configure N180TC, if you want the N182TC or N184TC; or select N210TC, to have the N213TC or N215TC

EVOX CP07

55 Nm

i	[n ₁ =1,400rpm]			[n ₁ =1,700rpm]			
	Mn ₂	n ₂	Pn ₁	Mn ₂	n ₂	Pn ₁	
	Nm	rpm	kW	lb·in	rpm	HP	
2 stages	2.8	35	497	1.8	290	603	2.8
	3.2	37	434	1.7	307	527	2.6
	3.5	40	406	1.7	332	493	2.6
	4.0	40	353	1.5	332	428	2.3
	4.6	45	305	1.4	373	371	2.2
	4.9	45	283	1.3	373	344	2.0
	5.8	50	242	1.3	415	293	1.9
	6.9	50	204	1.1	415	248	1.6
	7.5	51	186	1.0	423	226	1.5
	8.0	55	175	1.0	487	213	1.6
	9.2	55	152	0.9	487	185	1.4
	9.9	55	142	0.8	487	172	1.3
	10.6	55	132	0.8	487	160	1.2
	11.5	55	122	0.7	487	148	1.1
	13.4	55	104	0.6	487	127	1.0
3 stages	15.9	55	88	0.5	487	107	0.8
	17.4	55	80	0.5	487	98	0.8
	21.0	55	67	0.4	487	81	0.6
	22.5	55	62	0.4	487	76	0.6
	26.0	55	54	0.3	487	65	0.5
	28.1	55	50	0.3	487	61	0.5
	32.9	55	43	0.2	487	52	0.4
	38.9	55	36	0.2	487	44	0.3
	42.9	55	33	0.2	487	40	0.3
	46.1	55	30	0.2	487	37	0.3
4 stages	49.6	55	28	0.2	487	34	0.3
	53.5	55	26	0.2	487	32	0.2
	62.6	55	22	0.1	487	27	0.2
	74.2	55	19	0.1	487	23	0.2
	81.2	55	17	0.1	487	21	0.2



Adapter can be coupled



Adapter can be coupled [Input power should not exceed the "Max input power"]



Adapter can be coupled in NEMA version only. Input power should not exceed the "Max. Input power".



Adapter cannot be coupled in...

Please, configure N140TC, to have the N143TC or N145TC input flange; or configure N180TC, if you want the N182TC or N184TC; or select N210TC, to have the N232TC or N215TC.



PERFORMANCE

EVOX COAXIAL GEAR UNIT

Performance Table

EVOX CP17

100 Nm

i	[n ₁ =1,400rpm]			[n ₁ =1,700rpm]			Motor adapters								Solid Shaft		
	Mn ₂	n ₂	Pn ₁	Mn ₂	n ₂	Pn ₁	IEC	P56	P63	P71	P80	P90	P100	P112	P132		
	Nm	rpm	kW	lb·in	rpm	HP	NEMA	-	-	N56C	N143TC	N145TC	N182TC	N184TC	N213TC	N215TC	
2 stages	2.4	45	583	2.7	373	708	4.2					•					HS1/ NHS1
	2.9	50	483	2.5	415	586	3.9					•					
	3.3	55	428	2.5	456	520	3.8					•					
	3.8	60	369	2.3	498	449	3.5					•					
	4.5	65	310	2.1	539	377	3.2					•					
	5.1	70	275	2.0	581	334	3.1					•					
	5.8	75	243	1.9	622	295	2.9					•					
	6.2	75	228	1.8	622	276	2.7					•					
	7.0	80	199	1.7	664	241	2.5					•					
	7.6	80	185	1.6	664	225	2.4					•					
	8.5	90	164	1.5	747	199	2.4					•					
	10.2	95	138	1.4	788	167	2.1					•					
	11.5	100	122	1.3	885	148	2.1					•					
	13.0	100	108	1.1	885	131	1.8					•					
	13.8	100	101	1.1	885	123	1.7					•					
	15.8	100	88	0.9	885	107	1.5					•					
	17.0	100	82	0.9	885	100	1.4					•					
	19.7	100	71	0.7	885	86	1.2										
	23.2	100	60	0.6	885	73	1.0										
	25.2	100	55	0.6	885	67	0.9										
3 stages	27.2	100	51	0.5	885	62	0.9										
	31.3	100	45	0.5	885	54	0.8										
	36.0	100	39	0.4	885	47	0.7										
	38.8	100	36	0.4	885	44	0.6										
	41.8	100	33	0.4	885	41	0.6										
	48.7	100	29	0.3	885	35	0.5										
	52.4	100	27	0.3	885	32	0.5										
	56.6	100	25	0.3	885	30	0.4										
	66.2	100	21	0.2	885	26	0.4										
	78.5	100	18	0.2	885	22	0.3										
	85.9	100	16	0.2	885	20	0.3										

Adapter can be coupled

Adapter can be coupled [Input power should not exceed the "Max input power"]

Adapter can be coupled in NEMA version only. [Input power should not exceed the "Max Input power"]

Adapter cannot be coupled

Please, configure N140TC, to have the N143TC or N145TC input flange; or configure N180TC, if you want the N182TC or N184TC; or select N210TC, to have the N213TC or N215TC



EVOX CP37

200 Nm

i	[n ₁ =1,400rpm]			[n ₁ =1,700rpm]			Motor adapters								Solid Shaft		
	Mn ₂	n ₂	Pn ₁	Mn ₂	n ₂	Pn ₁	IEC	P56	P63	P71	P80	P90	P100	P112	P132		
	Nm	rpm	kW	lb-in	rpm	HP	NEMA	-	-	N56C	N143TC	N145TC	N182TC	N184TC	N213TC	N215TC	
2 stages	2.3	73	622	4.8	606	756	7.3						•	•			HS2/NHS2
	2.7	84	519	4.6	697	630	7.0						•	•			
	3.2	94	440	4.3	780	535	6.6						•	•			
	3.4	103	412	4.4	854	500	6.8						•	•			
	4.1	113	345	4.1	937	419	6.2						•	•			
	4.3	110	328	3.8	913	398	5.8										
	4.8	121	293	3.7	1004	356	5.7						•	•			
	5.4	127	261	3.5	1054	317	5.3						•	•			
	6.4	137	218	3.1	1137	264	4.8										
	7.8	148	179	2.8	1228	217	4.2										
	9.0	156	155	2.5	1294	188	3.9										
	10.0	163	140	2.4	1352	170	3.6						•	•			
	10.6	166	133	2.3	1377	161	3.5										
	11.8	174	119	2.2	1444	144	3.3						•	•			
	13.2	181	106	2.0	1502	129	3.1						•	•			
	15.8	194	88	1.8	1609	107	2.7										
	18.0	200	78	1.6	1770	94	2.7										
	19.3	200	73	1.5	1770	88	2.5										
	22.2	200	63	1.3	1770	76	2.1										
	26.0	200	54	1.1	1770	65	1.8										
3 stages	30.0	200	47	1.0	1770	57	1.6						•	•			HS1/NHS1
	33.8	200	41	0.9	1770	50	1.4						•	•			
	38.3	200	37	0.8	1770	44	1.2						•	•			
	40.9	200	34	0.7	1770	42	1.2										
	46.8	200	30	0.6	1770	36	1.0										
	50.2	200	28	0.6	1770	34	1.0										
	53.6	200	26	0.5	1770	32	0.9						•	•			
	58.2	200	24	0.5	1770	29	0.8										
	60.4	200	23	0.5	1770	28	0.8						•	•			
	68.5	200	20	0.4	1770	25	0.7						•	•			
	73.1	200	19	0.4	1770	23	0.7										
	83.6	200	17	0.4	1770	20	0.6										
	89.7	200	16	0.3	1770	19	0.5										
	104.0	200	13	0.3	1770	16	0.5										
	122.1	200	11	0.2	1770	14	0.4										
	133.2	200	11	0.2	1770	13	0.4										

Adapter can be coupled

Adapter can be coupled [Input power should not exceed the "Max input power"]

• Adapter can be coupled in NEMA version only. [Input power should not exceed the "Max Input power"]

Adapter cannot be coupled

Please, configure N140TC, to have the N143TC or N145TC input flange; or configure N180TC, if you want the N182TC or N184TC; or select N210TC, to have the N213TC or N215TC



PERFORMANCE

EVOX COAXIAL GEAR UNIT

Performance Table

EVOX CP47

335 Nm

i	[n ₁ =1,400rpm]			[n ₁ =1,700rpm]			Motor adapters								Solid Shaft		
	Mn ₂	n ₂	Pn ₁	Mn ₂	n ₂	Pn ₁	IEC	P56	P63	P71	P80	P90	P100	P112	P132		
	Nm	rpm	kW	lb-in	rpm	HP	NEMA	-	-	N56C	N143TC	N145TC	N182TC	N184TC	N213TC	N215TC	
2 stages	2.4	100	593	6.2	830	720	9.5										HS3/NHS3
	3.0	115	467	5.6	954	567	8.6										
	3.3	145	420	6.4	1203	511	9.7										
	3.9	152	363	5.8	1261	440	8.8										
	4.4	160	322	5.4	1327	391	8.2										
	4.9	170	285	5.1	1410	346	7.7										
	5.5	180	256	4.8	1493	311	7.4										
	6.4	190	219	4.4	1576	266	6.7										
	7.1	200	197	4.1	1659	239	6.3										
	8.0	210	176	3.9	1742	214	5.9										
	8.6	215	163	3.7	1784	198	5.6										
	9.7	225	145	3.4	1867	176	5.2										
	10.9	245	128	3.3	2033	155	5.0										
	12.2	250	115	3.0	2074	140	4.6										
	14.2	265	99	2.7	2198	120	4.2										
	15.8	278	89	2.6	2306	108	3.9										
	17.7	290	79	2.4	2406	96	3.7										
	18.8	297	75	2.3	2464	91	3.5										
	21.3	310	66	2.1	2744	80	3.5										
	22.7	315	62	2.0	2788	75	3.3										
	26.1	335	54	1.9	2965	65	3.1										HS2/NHS2
	30.4	335	46	1.6	2965	56	2.6										
	33.0	335	42	1.5	2965	52	2.4										
3 stages	24.3	280	58	1.7	2323	70	2.6										
	26.6	290	53	1.6	2406	64	2.4										
	31.4	310	45	1.4	2572	54	2.2										
	35.2	310	40	1.3	2572	48	2.0										
	39.6	310	35	1.1	2572	43	1.8										
	42.1	310	33	1.1	2572	40	1.6										
	47.9	330	29	1.0	2921	35	1.6										
	51.3	335	27	1.0	2965	33	1.6										
	55.4	310	25	0.8	2744	31	1.3										
	60.8	335	23	0.8	2965	28	1.3										
	71.6	335	20	0.7	2965	24	1.1										
	80.2	335	17	0.6	2965	21	1.0										
	90.4	335	15	0.5	2965	19	0.9										
	96.1	335	15	0.5	2965	18	0.8										
	109.4	335	13	0.4	2965	16	0.7										
	117.1	335	12	0.4	2965	15	0.7										
	135.1	335	10	0.4	2965	13	0.6										
	158.0	335	9	0.3	2965	11	0.5										
	171.9	335	8	0.3	2965	10	0.5										

■ Adapter can be coupled

■ Adapter can be coupled [Input power should not exceed the "Max input power"]

● Adapter can be coupled in NEMA version only. [Input power should not exceed the "Max Input power"]

— Adapter cannot be coupled

Please, configure N140TC, to have the N143TC or N145TC input flange; or configure N180TC, if you want the N182TC or N184TC; or select N210TC, to have the N213TC or N215TC




PERFORMANCE

EVOX COAXIAL OUTPUT RADIAL AND AXIAL LOADS

Tables introduction

Max radial loads are calculated with:

- M_{n2} torque applied on output shaft
- most unfavourable gear unit rotating direction [CW or CCW]
- the applied radial force with the most unfavourable α angle, among all gear ratios
- radial load applied in the middle of the output shaft



The permitted radial loads can increase considerably when the parameters listed above vary. [contact Bonfiglioli's Technical Service](#) if your application requires radial loads greater than the values indicated in the tables, because they could be available with a standard gear unit or with a simple option

Axial load values are not dependent on the service factor or output speed, but are referred to pure axial forces applied with inward direction in the gear unit direction. If the force on the output shaft has both radial and axial components or the direction of the force is outgoing from the gear unit, [contact Bonfiglioli's Technical Service](#).

[contact Bonfiglioli's Technical Service](#)

S Service Factor [M_{n2}/M_2]

M_{n2} Nominal Output Torque

M_2 Gear Unit Output Torque

N_2 Gear Unit Output Speed

Maximum load with standard output bearings


n ₂ [rpm]	Radial				Axial N
	0.9 ≤ S < 1.25	1.25 ≤ S < 1.4	1.4 ≤ S < 2	2 ≤ S < 3	
CP07	n ₂ < 50	1,470	1,570	1,840	2,030
	50 ≤ n ₂ < 150	1,350	1,460	1,600	1,700
	150 ≤ n ₂ < 300	•	870	1,130	1,310
	300 ≤ n ₂ < 500	•	•	660	1,000
	n ₂ ≥ 500	•	•	•	840

Maximum load with output reinforced bearings

	Radial [OHR]				Axial [OHA] N
	0.9 ≤ S < 1.25	1.25 ≤ S < 1.4	1.4 ≤ S < 2	2 ≤ S < 3	
CP17	n ₂ < 50	2,460	2,660	3,100	3,470
	50 ≤ n ₂ < 150	1,850	2,050	2,470	2,870
	150 ≤ n ₂ < 300	940	1,140	1,580	2,220
	300 ≤ n ₂ < 500	•	•	860	1,540
	n ₂ ≥ 500	•	•	•	1,190
CP37	n ₂ < 50	4,110	4,440	5,130	5,430
	50 ≤ n ₂ < 150	3,110	3,460	4,080	4,330
	150 ≤ n ₂ < 300	1,530	1,880	2,670	3,340
	300 ≤ n ₂ < 500	•	•	1,410	2,560
	n ₂ ≥ 500	•	•	•	2,040
CP47	n ₂ < 50	5,240	5,570	6,300	7,450
	50 ≤ n ₂ < 150	3,460	3,820	4,630	5,830
	150 ≤ n ₂ < 300	1,780	2,140	2,950	4,210
	300 ≤ n ₂ < 500	•	•	1,610	2,890
	n ₂ ≥ 500	•	•	•	2,230

SIZES

EVOX COAXIAL GEARMOTOR

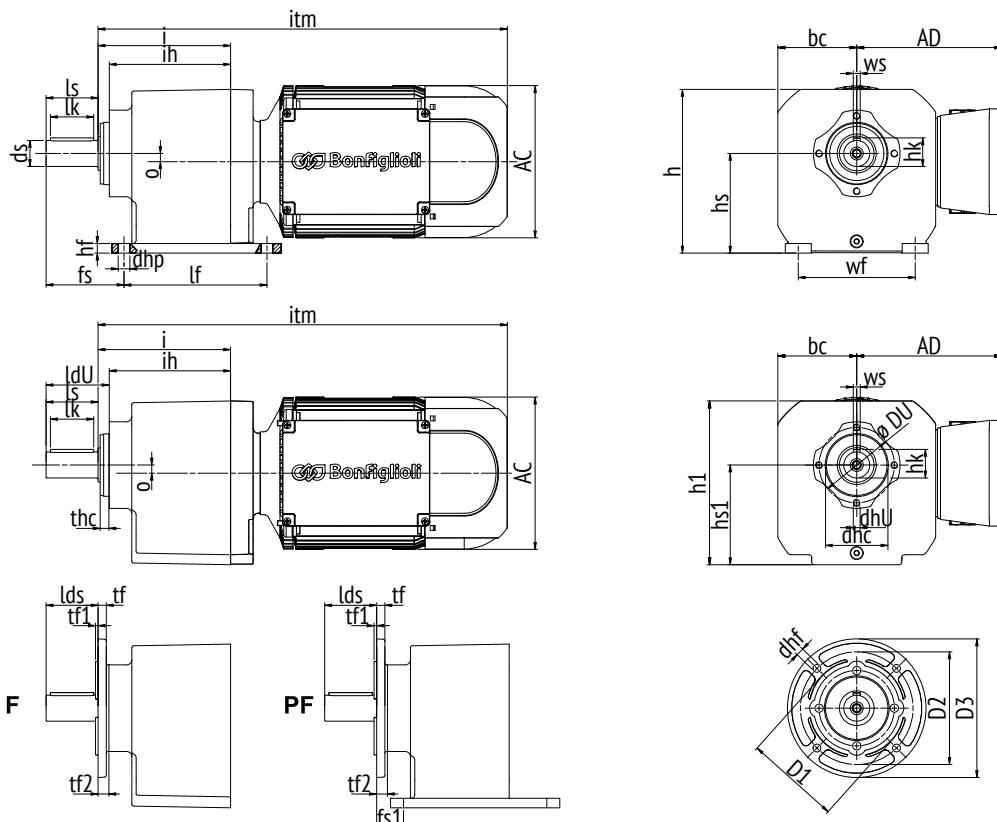

	If	wf	dhp	Recommended screw	hf	hs	h	ih	i	o	bc	h1	hs1	DU	dhU	dhc	lds	thc	tf	tf1	tf2
CP07	95	85	6,5	M6	6	65	107	79	84,5	0	51,5	106,5	64,5	60	M6	50 f7	40	4	4,5	4,0	5
CP17	110	110	9	M8	11	75	134	99	109	0	70	133,5	74,5	87	M8	70 f7	40	5,5	9,5	3,5	10,5
CP37	130	110	9	M8	11	90	145	117,5	130	6,4	75	144,5	89,5	87	M8	70 f7	50	6	9,5	3,5	13,5
CP47	165	135	13,5	M12	11	115	189	140	153	9,5	91	188,5	114,5	87	M8	72 f7	60	6,5	9,5	3,5	13,5
CP57																					
CP67																					

MXN - [Compact IE3/NEMA Premium] & MNN - [Compact IE1/NEMA Standard]

Motor size (kW)	05MA (0.12)	10MA (0.25)	20MA (0.55)	25S (1.1)	30LA (2.2)	35M (4)	40S (5.5)	40M (7.5)
AC	122	138	158	177	195	220		
AD	136	138	148	170	179	191		
itm								
CP07	377	381	-	-	-	-		
CP17	389	393	438	-	-	-		
CP37	407	411	456	461	-	-		
CP47	430	434	479	484	582	600		
CP57								
CP67								

Coming soon

	D1	D2	D3	dhf	dhf CP07
F120	80 f7	100	120	6,6	6,5
F140	95 f7	115	140	9	6,5
F160	110 f7	130	160	9	6,5
F200	130 f7	165	200	10,5	-
F250	180 f7	215	250	13	-

Available soon diameter dhf = 9 for F140 and F160 flanges of CP 07

Metric [Standard output shaft version]

	ds	ls	lk	ldU	hk	ws	fs	fs1
CP07	20 h6	40	32	45	22,5	6 h9	48	8
CP17	20 h6	40	32	50,5	22,5	6 h9	58	18
CP37	25 h6	50	40	63,5	33	8 h9	75	25
CP47	30 h6	60	50	73,5	33	8 h9	90	30
CP57								
CP67								

Coming soon

Imperial [N-output shaft version] - Dimensions expressed in inches

	ds	ls	lk	ldU	hk	ws	fs	fs1
CP07	3/4 ^{+0,0000} _{-0,0006}	1-9/16	-	1-25/32	27/32	3/16 ^{+0,0000} _{-0,0014}	1.890	0.315
CP17	3/4 ^{+0,0000} _{-0,0006}	1-9/16	-	1-31/32	27/32	3/16 ^{+0,0000} _{-0,0014}	2.283	0.709
CP37	1 ^{+0,0000} _{-0,0006}	2	-	2-1/2	1-3/32	1/4 ^{+0,0000} _{-0,0014}	2.953	0.984
CP47	1-1/4 ^{+0,0000} _{-0,0006}	2-3/8	-	2-29/32	1-3/8	1/4 ^{+0,0000} _{-0,0014}	3.543	1.181
CP57								
CP67								


Coming soon

If not otherwise specified, dimensions are expressed in mm

For motor brake and options dimension see [EVOX Electric Motor and Brake Dimension](#)



EVOX COAXIAL GEAR UNIT

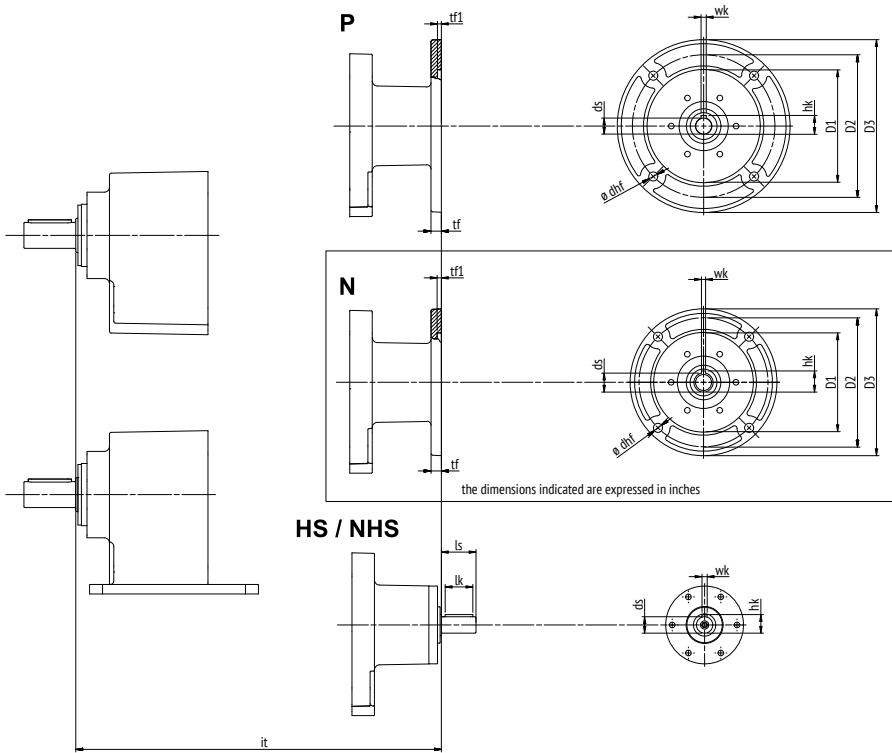

IEC Standard Flanges

Metric dimensions	D3	D2	tf	dhf	D1	tf1	ds	hk	wk
P56	120								
P63	140	115	10	9	95 f7	4	11 E7	12.8	4 H9
P71	160	130	10	9	110 f7	4	14 E7	16.3	5 H9
P80	200	165	12	10.5	130 f7	4.5	19 E7	21.8	6 H9
P90	200	165	12	10.5	130 f7	4.5	24 E7	27.3	8 H9
P100	250	215	15	13	180 f7	4.5	28 E7	31.3	8 H9
P112	250	215	15	13	180 f7	4.5	28 E7	31.3	8 H9
P132					Coming soon				

NEMA Standard Flanges - Dimensions expressed in inches

	D3	D2	tf	dhf	D1	tf1	ds	hk	wk
Inch dimensions									
N56	6-1/2	5-7/8	0.472	0.413	4-1/2	^{+0.0020} _{-0.0011}	0.197	5/8	^{+0.0014} _{-0.0006}
N143	6-1/2	5-7/8	0.472	0.413	4-1/2	^{+0.0020} _{-0.0011}	0.197	7/8	^{+0.0014} _{-0.0006}
N145	6-1/2	5-7/8	0.472	0.413	4-1/2	^{+0.0020} _{-0.0011}	0.197	7/8	^{+0.0014} _{-0.0006}
N182	8,996	7-1/4	0.827	0.551	8-1/2	^{+0.0020} _{-0.0012}	0.197	1-1/8	^{+0.0014} _{-0.0006}
N184	8,996	7-1/4	0.827	0.551	8-1/2	^{+0.0020} _{-0.0012}	0.197	1-1/8	^{+0.0014} _{-0.0006}
N213									
N215								Coming soon	

it	CP07	CP17	CP37	CP47	CP57	CP67
	7.362	7.835	8.504	9.449		
	-	7.874	8.543	9.488		
	-	-	8.543	9.488		
	-	-	10.787	11.220		Coming soon
	-	-	10.787	11.220		
					Coming soon	

Solid input shaft

	ds	ls	hk	wk	lk
Metric dimensions					
HS1	16 h6	40	18	5 h9	32
HS2	19 h6	40	21.5	6 h9	32
HS3	24 h6	50	27	8 h9	40
Inch dimensions					
NHS1	5/8 +0.0000 -0.0004	1.575	23/32	3/16 +0.0000 -0.0001	1.26
NHS2	3/4 +0.0000 -0.0005	1.575	27/32	3/16 +0.0000 -0.0001	1.26
NHS3	7/8 +0.0000 -0.0098	2	31/32	3/16 +0.0000 -0.0001	1.575


it	CP07	CP17	CP37	CP47	CP57	CP67
-	196	215		-		
-	-	235		260		
-	-	-		284		
						Coming soon
-	7.717	8.445		-		
-	-	9.154		10.236		
-	-	-		11.181		

If not otherwise specified, dimensions are expressed in mm



OPTIONS | AVAILABLE FOR EVOX COAXIAL GEAR UNIT

Option Designation - CP"

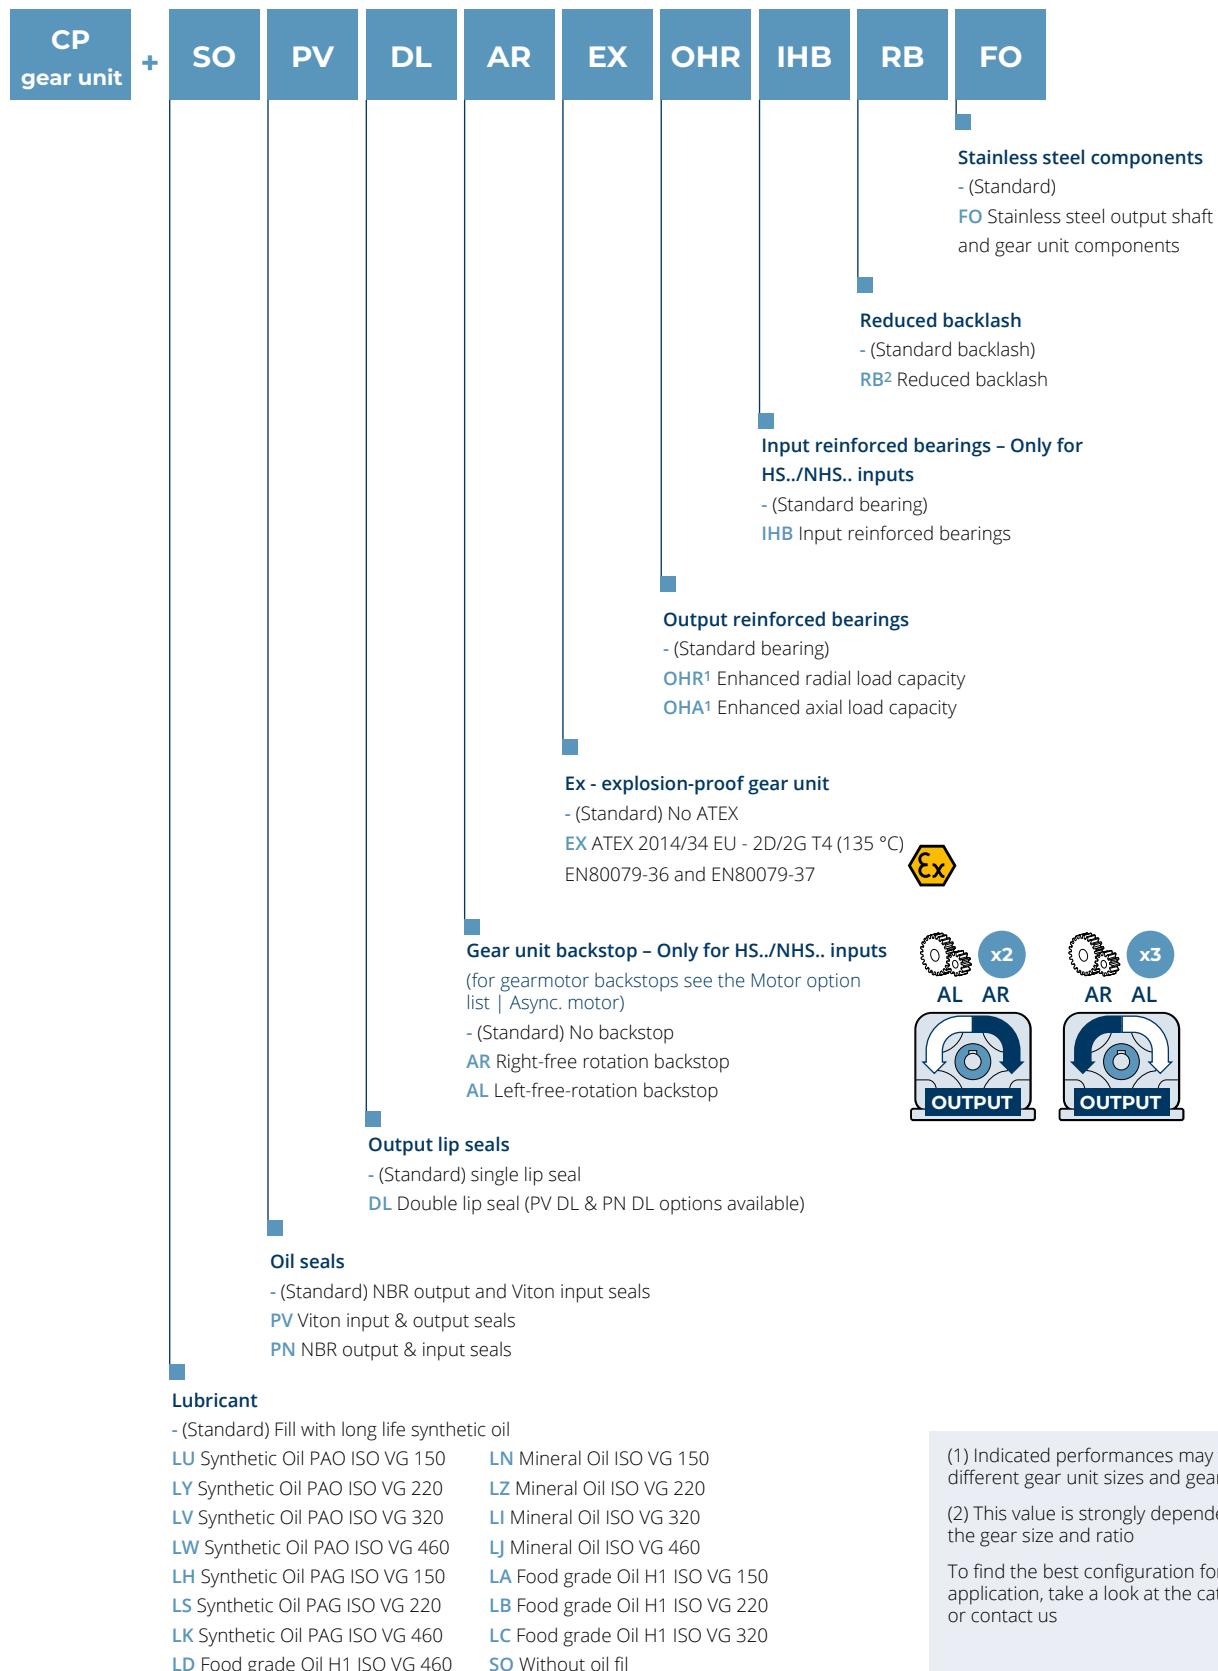

... ⁽¹⁾	+	RAL5010	C3	AC
				<p>Certificates</p> <ul style="list-style-type: none"> - (Standard) Without certificate AC Gear unit compliance certificate CC Inspection certificate
			<p>Surface protection</p> <ul style="list-style-type: none"> - (Standard) C2 protection C3 C4 <p>For C5 according to UNI EN ISO 12944-2, please contact our Technical Customer Support for further details</p>	
				<p>Painting</p> <ul style="list-style-type: none"> - (Standard) RAL7042 Traffic Grey A RAL5010 Gentian Blue RAL9005 Jet Black RAL9006 White aluminium RAL9010 Pure White RAL7035 Light Grey RAL7001 Silver Grey RAL7037 Dusty Grey RAL5015 Sky Blue RAL5024 Pastel blue

(1) Those options are available for Gear Units, Gearmotors, Gear brake motors, Stand alone motors and Stand alone Brake motors

OPTIONS | AVAILABLE FOR EVOX COAXIAL GEAR UNIT

OPTION DETAIL

Lubricant

EVOX CP gear units are supplied **lubricated for life** with Shel Omala S4 WE320 (PAG) synthetic oil. It is recommended to carry out monthly oil level checks if the gear unit works at intermittent duty. If the gear unit works at continuous duty, more frequent checks are recommended. In both cases, top up if lubricant level is low.

The following additional variants are available:

Synthetic oil variants

LU	Synthetic Oil PAO ISO VG 150	LH	Synthetic Oil PAG ISO VG 150
LY	Synthetic Oil PAO ISO VG 220	LS	Synthetic Oil PAG ISO VG 220
LV	Synthetic Oil PAO ISO VG 320	LK	Synthetic Oil PAG ISO VG 460
LW	Synthetic Oil PAO ISO VG 460		

Mineral oil variants

LI	Mineral Oil ISO VG 320	LN	Mineral Oil ISO VG 150
LJ	Mineral Oil ISO VG 460	LZ	Mineral Oil ISO VG 220

Mineral oil can be used in gearmotors with service factor $S \geq 1.3$

Edible oil variants

LA	Food grade Oil H1 ISO VG 150	LC	Food Grade Oil H1 ISO VG 320
LB	Food Grade Oil H1 ISO VG 220	LD	Food Grade Oil H1 ISO VG 460

When configuring LA, LB, LC and LD variants, the gear unit will be filled with oils compatible with the area of incidental contact with products and packaging materials from the food, cosmetics, pharmaceutical and feed industries. These lubricants are NSF H1 approved, FDA 21 CFR § 178.3570 compliant and ISO 21469 certified.

For the use of these oils, further risk analysis (e.g. HACCP) is recommended to validate the technical solution.

Oil-free variant

SO	Without oil fill
-----------	-------------------------


When configuring SO option, gear units are supplied without lubricant.

The oil quantity for each gear unit size is:

Size	Volume (L)
07	0,35
17	0,7
37	1,1
47	1,8

The gear unit can be filled with different oils, according to the application needs.

Refer to the following table to identify correct viscosity according to the operating temperature of the gear unit.

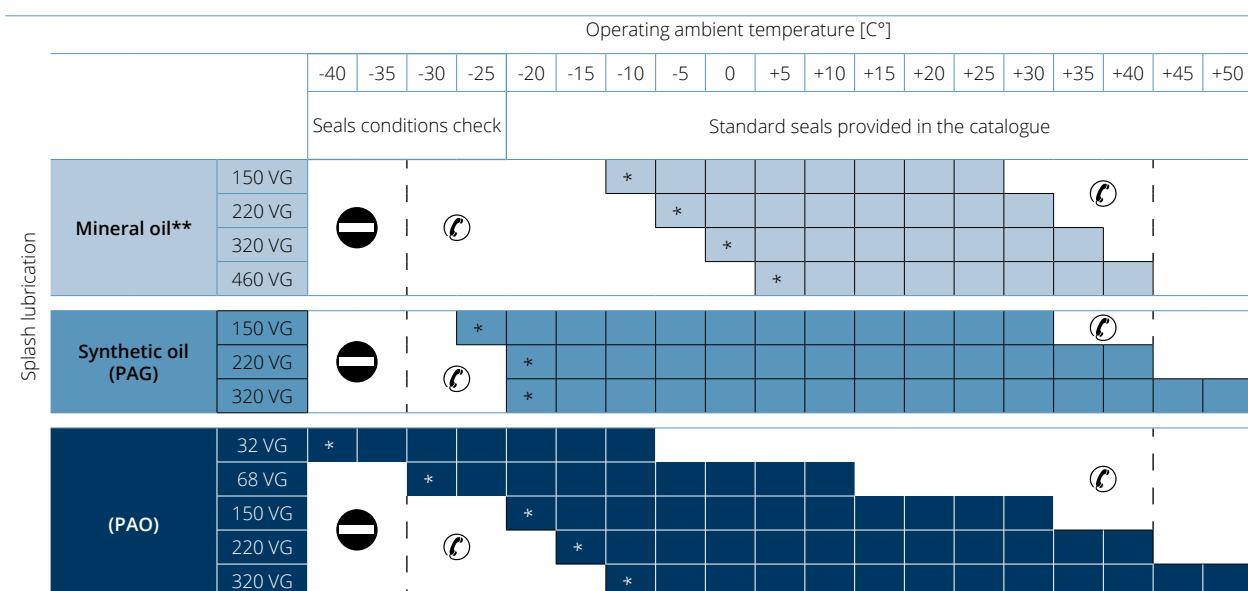

 Recommended operating limits.

 Allowed operating limits. 

 Forbidden operating limits.

 If needed, and in the event of impulse loads, [contact Bonfiglioli's Technical Service](#).

* For temperatures that are too low, the density of the oil is high enough that there is a risk of damaging the gearbox and the motor. Therefore, it is highly recommended to provide an adequate starting ramp

** Mineral oil can be used in gearmotors with service factor $S \geq 1.3$

ATTENTION

- Bonfiglioli's factory filled gear units should not be operated outside the temperature range indicated in this catalogue.
- Bonfiglioli shall not be liable for use of lubricants outside the suggested temperature range or mixtures of different lubricant types or manufacturers.
- Oils with the same viscosity and different brands may have different characteristics in terms of operating temperature ranges. The table above provides a general indication; it is therefore recommended to carefully check the technical specifications of the oil before topping up and using EVOX gear units.
- If filling is to be carried out, do not mix synthetic and mineral oils and/or different brands.
- Do not let the oil temperature drop below the pour point -39°C or rise above 100°C, also in storage conditions.
- Always refer to the User's Manual available at www.bonfiglioli.com for further indications concerning any periodic oil check and replacement.

OPTIONS | AVAILABLE FOR EVOX COAXIAL GEAR UNIT

OPTION LIST DEEP DIVE

Oil seals

Gear Units are supplied as standard with a Viton Seal in input and a single lip NBR Seal in output.

Suggested versions:

Ambient temperature	Below -25°C CTS	From -25°C to 0°C PN	From 0°C to 35°C Standard	From 35°C to 50°C PV	Over 50°C CTS
---------------------	--------------------	-------------------------	------------------------------	-------------------------	------------------

CTS = [contact Bonfiglioli's Technical Service](#)

PV

Viton input and output seals

With this option active, Gear Units are supplied with Viton seals both in input and output.

PN

NBR output & input seals

With this option active, Gear Units are supplied with NBR seals both in input and output.

Output lip seals

Gear Units are supplied as standard with a single output lip seal.

DL

Double lip seal

With this option active, Gear Units are supplied with a double lip NBR seal in output.

Select with this option also "PV", if you want the double lip Viton seals in output.


Gear unit backstop – Only for HS../NHS.. inputs

Gear units can be supplied with a backstop in case of HS input. For gearmotor backstops, see the [Motor Option List](#). Be mindful that the Clockwise [CW] and Counter-clockwise [CCW] rotation option of the output shaft depends on the gear unit stage number.

AR/AL

Free right/left rotation backstop

- **AR:** free right rotation
- **AL:** free left rotation



Output reinforced bearings

Gear units are supplied with strong and reliable ball bearings as standard; however, if your application requires higher performance, you can choose reinforced bearings in output with the following options.

OHR

Enhanced radial load capacity


With those bearings, the radial loads at the gear unit output would be increased. This is the right solution for a decentralized (belt and pulley) or a chain-pinion transmission. The values listed in the following table are the rated ones and may vary based on output speed and service factor. Refer to the Performance Table with [Output Radial Load](#), to choose the right bearing for your application.

		CP07	CP17	CP37	CP47	CP57	CP67
Maximum allowed pure radial loads [N]	Standard version	1470	2460	4110	5240		
	OHR option	1640	3460	6580	8420	Coming soon	

Parameters are calculated with the following criteria:

- $[M_{n2}]$ torque applied on output shaft
- most unfavourable gear unit rotating direction [CW or CCW]
- the applied radial force with the most unfavourable α angle, among all gear ratios
- radial load applied in the middle of the output shaft

The permitted radial loads can increase considerably when the parameters listed above vary. [contact Bonfiglioli's Technical Service](#) if your application requires radial loads greater than the values indicated in the tables, because they could be available with a standard gear unit or with a simple option



OHA

Enhanced axial load capacity

With those bearings, the axial loads at the gear unit output would be increased. This is the right solution for axial pumps or screw conveyors. Maximum axial load values are listed below:

		CP07	CP17	CP37	CP47	CP57	CP67
Maximum allowed pure axial loads [N]	Standard version	2370	3270	5600	7650		
	OHA option			15000	20000	Coming soon	

CTS = [contact Bonfiglioli's Technical Service](#)

These values do not depend on Service factor or output speed but are referred to pure axial forces in the Gear Unit direction. If output shaft has both radial and axial forces or the direction of the force is outgoing from the gear unit, [contact Bonfiglioli's Technical Service](#)

OPTIONS | AVAILABLE FOR EVOX COAXIAL GEAR UNIT

OPTION LIST DEEP DIVE

Input reinforced bearings – Only for HS../NHS.. inputs

Gear units are supplied with strong and reliable ball bearings as standard; however, if your application has different requirements, we can supply:

IHB

Input reinforced bearings

With those bearing, the radial loads capacity in input of the gear unit could be enhanced. This is the right solution for a decentralized (belt and pulley) or a chain-pinion transmission.

To select the most suitable solution, [contact Bonfiglioli's Technical Service](#)

Reduced backlash

RB

Reduced backlash

With this option active, Gear Units are supplied with a reduced angular backlash compared to the standard version.

Size	Standard backlash [arcmin]		Reduced backlash [arcmin]	
	2 stages	3 stages	2 stages	3 stages
0.7	11-18	20-25	7-12	10-16
17	11-18	20-25	7-12	10-16
37	11-18	20-25	7-12	10-16
47	11-18	20-25	7-12	10-16
57				Coming soon
67				

CTS = [contact Bonfiglioli's Technical Service](#)

Stainless steel gear unit components

FO

Stainless steel output shaft and gear unit components

To increase the life and reliability of the gear unit in wet or aggressive environments, this option includes the following stainless steel components:

- Output shaft
- Output flange fixing screws
- Solid input shaft for HS configurations
- Gear unit nameplate
- Oil filler cap
- Housing locking screws for CP07
- Housing locking screws for CP17-47 in steel with zinc flake coating



Painting option

RAL5010

RAL painting

Gear units with optional protection to class C3 or C4 are available in the colours listed in the following table.

Painting	Colour	RAL number
RAL7042 *	Traffic Grey A	7042
RAL5010	Gentian Blue	5010
RAL9005	Jet Black	9005
RAL9006	White Aluminium	9006
RAL9010	Pure White	9010
RAL7035	Light Grey	7035
RAL7001	Silver Grey	7001
RAL7037	Dusty Grey	7037
RAL5015	Sky Blue	5015
RAL5024	Pastel blue	5024

* gear units are supplied in this standard colour if no other colour is specified.

NOTE: "Paint" options can only be specified in conjunction with "Surface protection" options.

C3

Surface protection class

When no specific protection class is requested, the surface of the gear units is by default at least equivalent to class C2 (UNI EN ISO 12944-2). For a higher degree of protection, the gear units can be supplied with a class **C3** and **C4** painting.

Surface protection	Typical environments	Maximum surface temperature	Corrosion class according to UNI EN ISO 12944-2
C3	Urban and industrial environments with up to 100% relative humidity (average air pollution)	120 °C	C3
C4	Industrial areas, coastal areas, chemical plants, with up to 100% relative humidity (high air pollution)	120 °C	C4

gear units with optional protection class **C3** or **C4** are available in a choice of colours.

Gear units can also be supplied with surface protection class **C5** according to UNI EN ISO 12944-2.

[contact Bonfiglioli's Technical Service](#) for further details.

Certificates

ACM

Motor certificate of compliance

The document certifies the compliance of the product with the purchase order and the construction in conformity with the applicable procedures of Bonfiglioli's Quality System.

CC

Inspection certificate

The document entails checking the order compliance, visual inspection of external conditions and instrumental testing of the electrical characteristics in unloaded conditions. Inspected units are sampled within the shipping batch and marked individually.



OPTIONS | AVAILABLE FOR EVOX COAXIAL GEAR UNIT

OPTION LIST DEEP DIVE



EX

ATEX 2014/34/EU - 2D/2G T4 (135 °C)

With this option active, the gear unit can be installed in Ex 1 and 21 areas (categories 2G and 2D). The temperature class is T4 (max 135°C).

To comply with this particular environment, Gear Units are equipped with:

- Service plugs for periodic lubricant level checks
- Factory-charged with lubricant (synthetic oil)
- Fluoro elastomer seal rings as standard
- Nameplate indication of the product category and type of protection
- Components that can operate above the max temperature indicated as a limit in the regulation
- Temperature indicator supplied with each unit

The unique oil level allows you to fit EVOX CP in any of the positions with a single product code, as the standard version.

Moreover, the oil quantity is the same as in the standard version, please see the [oil fill table](#) for further information.

For the choice of an "EX" Gear Unit, the Mn2 (nominal torque) is the same as indicated in the [Gear Unit Performance Table](#), except for the following configurations with HS version:

	i	Mn ₂ Nm	n ₂ rpm	Pn ₁ kW	Solid Shaft
CP17 2 Stages	2.4	42	583	2.6	HS1
	2.9	45	483	2.3	
	3.3	47	428	2.1	
CP37 2 Stages	2.3	67	622	4.4	HS2
	2.7	73	519	4.0	
	3.2	78	440	3.6	
	3.4	100	412	4.3	
	4.1	110	325	3.7	
	4.3	86	328	3.0	
	4.8	117	293	3.6	
	5.4	122	261	3.3	
	6.4	129	218	2.9	
	7.8	136	179	2.5	
CP47 2 Stages	2.4	76	593	4.7	HS2
	3.0	84	467	4.1	
	3.3	90	420	4.0	
	3.9	124	363	4.7	
	4.4	131	322	4.4	
	4.9	137	285	4.1	
	5.5	148	256	4.0	
	6.4	156	219	3.6	
	7.1	161	197	3.3	
	8.0	166	176	3.1	

For further information refer to the user manual at www.bonfiglioli.com for compliant maintenance procedures.

Explosive atmosphere

An explosive atmosphere, for the purposes of Directive 2014/34/EU, is defined as a mixture:

- a. of flammable substances, in the form of gases, vapours, mists or dusts;
- b. with air;
- c. under atmospheric conditions;
- d. in which, after ignition, combustion spreads to the entire unburned mixture (sometimes, mainly with dust, the combustion does not consume the whole quantity of combustible material).

For further information refer to the user manual at www.bonfiglioli.com for compliant maintenance procedures.

An atmosphere that could become explosive due to local and/or operational conditions is called a potentially explosive atmosphere.

European harmonized Atex standards

Directive 2014/34/EU stipulates the minimum safety requirements for products intended for use in explosion risk areas within the member countries of the European Union.

The directive also assigns such equipment to categories, which are defined by the directive itself.

The following table describes the zones into which the user of a plant, in which an explosive atmosphere may occur, is required to divide the equipment application areas.

Zones		Frequency of formation of a potentially explosive atmosphere	Hazard Types
Gaseous atmosphere G	Dusty atmosphere D		
0	20	Present continuously or for long periods	Permanent
1	21	Likely to occur occasionally under normal operating conditions	Potential
2	22	It is not likely to occur in normal operations, but if it does, it will only persist for short periods	Minimum

BONFIGLIOLI RIDUTTORI gear units selected in this catalogue are suitable for installation in zones 1, 21, highlighted in light grey in the above diagram, and are also suitable for installation in areas with a lower level of protection (areas 2 and 22).

As from 20 April 2016 the ATEX directive 2014/34/EU come into force throughout the entire European Union, and replace existing conflicting national and European laws on explosive atmospheres and the previous directive 94/9/EC.

It should be emphasised that, for the first time, the directives also govern mechanical, hydraulic and pneumatic equipment, and not only electrical equipment as has been the case so far.

With regard to the Machinery Directive 2006/42/EC it should be noted that directive 2014/34/EU is a set of extremely specific requirements dedicated to the dangers deriving from potentially explosive atmospheres, whereas the Machinery Directive contains only very general explosion safety requirements (Annex I).

Consequently, as regards protection against explosion in potentially explosive atmospheres, Directive 2014/34/EU takes precedence over the Machinery Directive.

The requirements of the Machinery Directive apply to all other risks regarding machinery.

OPTIONS | EVOX COAXIAL GEAR UNIT

MORE ON OPTIONS LIST

Levels of protection for the various categories of equipment

The various categories of equipment must be able to operate in conformity with the Manufacturer's operational specifications, at certain defined levels of protection.

The availability of BONFIGLIOLI RIDUTTORI products is highlighted in grey.

Level of protection	Category		Protection type	Operating conditions
	Group I	Group II		
Very high	M1		Two independent protection or safety devices that can operate even at the occurrence of two independent faults.	The equipment remains powered and functional even in the presence of an explosive atmosphere.
Very high		1	Two independent protection or safety devices that can operate even at the occurrence of two independent faults.	The equipment remains powered and operational in areas 0, 1, 2 (G) and/or areas 20, 21, 22 (D).
High	M2		Protection suitable for normal operation and severe conditions.	The power supply to the equipment is interrupted in the presence of a potentially explosive atmosphere.
High		2	Protection suitable for normal operation and frequent failures or equipment where malfunctioning is normal.	The equipment remains powered and operational in areas 1, 2 (G) and/or areas 21, 22 (D).
Normal	2	3	Protection suitable for normal operation.	The pieces of equipment remain powered and operational in areas 2 (G) and/or areas 22 (D).

Group definition

Group I Applies to equipment intended for use underground work in mines and their surface installations, exposed to the risk of firedamp and/or combustible dust being released.

Group II Applies to equipment intended for use in other environments in which explosive atmospheres are likely to occur.

BONFIGLIOLI RIDUTTORI products may not therefore be installed in mines, classified in Group I and in Group II, category 1.

To summarise, the classification of equipment into groups, categories and zones is illustrated in the table below, whereby the availability of BONFIGLIOLI RIDUTTORI products is highlighted in grey.

		Group I		Group II			
Group		Mining, firedamp		Other potentially explosive areas (gas, dust)			
Category		M1	M2	1	2	3	
Atmosphere				Gas	Dust	Gas	Dust
Areas				0	20	1	21
Gear unit protection type						Ex h Gb	Ex h Db
						Ex h Gc	Ex h Dc

The products described here in conform to the minimum safety requirements of European Directive 2014/34/EU, which is part of the directives known as ATEX (ATmosphères EXplosibles).



Certificate of conformity

The Certificate of conformity, is the document certifying conformity of the product to Directive 2014/34/EU.

The validity of the Declaration is bound to observance of the instructions given in the User, Installation and Service Manual for safe use of the product throughout its service life. Users can download it at www.bonfiglioli.com.

The instructions regarding ambient conditions are of particular importance inasmuch as failure to observe them during operation of the product renders the certificate null and void.


In case of doubt regarding the validity of the certificate of conformity, contact the BONFIGLIOLI RIDUTTORI technical department.

Compatibility with other options

The following options cannot be selected in combination with the ATEX variant:

- Output shafts N in inches
- Compact inputs (S05...S35)
- Solid inputs in inches (NHS1...NHS3)
- NEMA inputs (N56...N215)
- Lubrication option (SO, LA...LY)
- Option on PN seals
- AR, AL backstop options
- Reinforced output bearing options (OHR, OHA)
- FO option
- C3-C4 painting options (any RAL colour)

ELECTRIC MOTOR EVOX

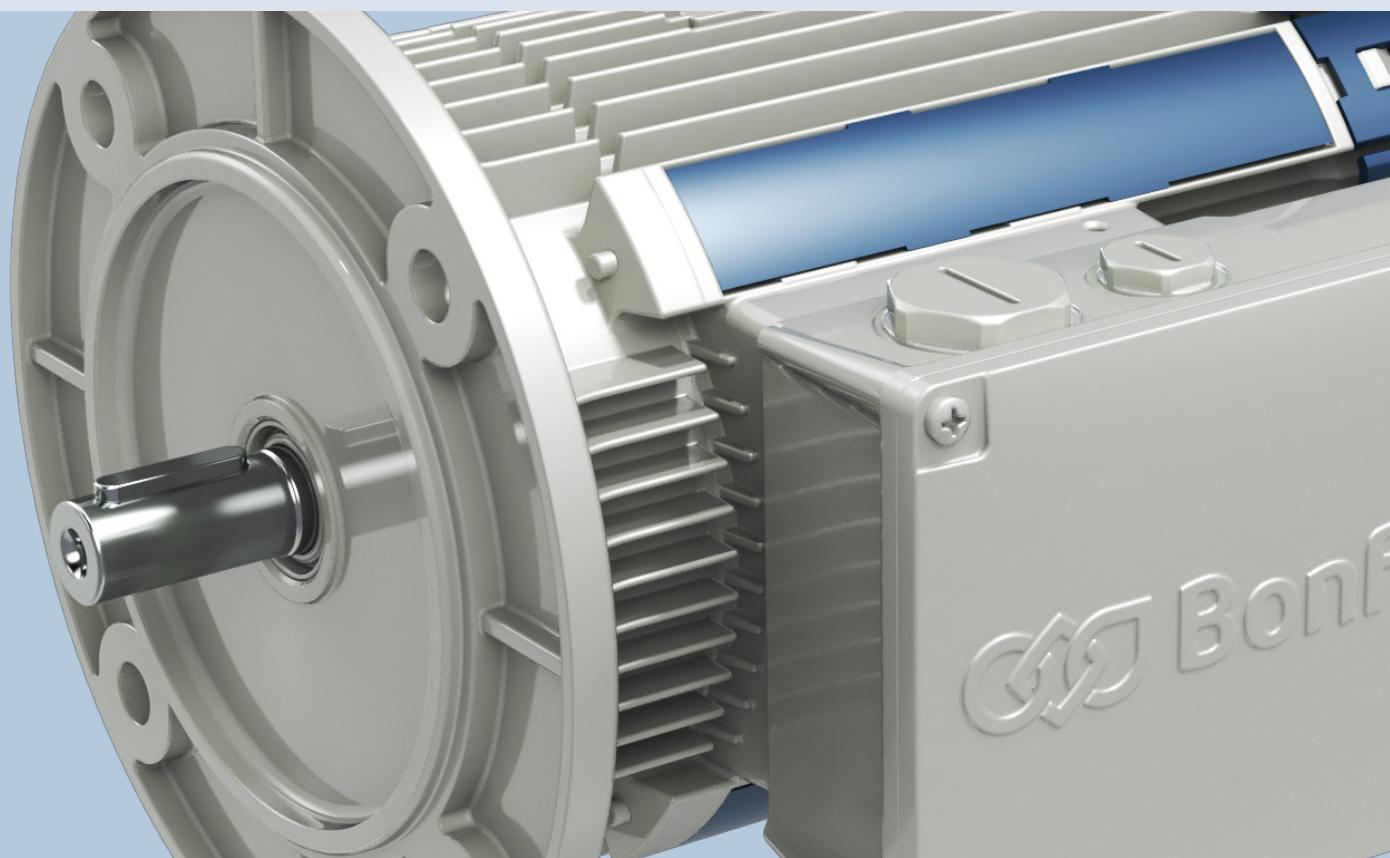

PRODUCT OVERVIEW

BONFIGLIOLI PORTFOLIO

EVOX BXN, MXN and MNN are asynchronous low voltage (<1000V) e-motors and brake motors, developed in the sign of modularity, efficiency and reliability.

The aim of this product is to be compliant with your needs, both in standalone version and in a compact coupling with Bonfiglioli Gear Units.



Efficiency	Compact			IEC
	IE1/NEMA Standard	IE3/NEMA Premium	IE3/NEMA Premium	
Series	MNN	MXN	BXN	Power [kW]
Poles	4	4	4	
	05MA	05MA	63MA	0,12
	05MB	05MB	63MB	0,18
	05MC	10MA	71MA	0,25
	10MA			0,25
	10MB	10MB	71MB	0,37
	10MC	20MA	80MA	0,55
		20MB	80MB	0,75
		25S	90S	1,1
		25L	90L	1,5
		30LA	100LA	2,2
		30LB	100LB	3
		35M	112M	4
		40S	132S	5,5
		40M	132M	7,5

PRODUCT OVERVIEW

BONFIGLIOLI PORTFOLIO

The Motor and Inverter in Bonfiglioli History



In the 1990s, Bonfiglioli integrated its gear unit design within the product portfolio and the know-how of an important local company, and started designing its own electric motors to create robust and efficient gearmotors.

In recent years Bonfiglioli has integrated its offer with servomotors and reluctance motors. In 2001, with the acquisition of Vectron, it began to design and manufacture inverters, thus becoming a **Solution Provider**.



**BSR
Reluctance
Motors**
Bonfiglioli
starts
designing
products
with
reluctance
technology

1980s

Acquisition of
the portfolio
and know-how
of an important
electric motor
company

Bonfiglioli
starts
designing
its own
e-motors

1990s

Vectron
acquisition.
Bonfiglioli
starts
developing
its own
inverters

2001

1995
Compact
motors.
Launch of
the ACFS and
W series



2012
BMD
servomotors
development
Bonfiglioli starts
designing its
servomotors



2017

2020
EVOX Platform
Redesigned
e-motor logic



E-motor Offer

Bonfiglioli offers a great set of opportunities to match your application requirements around the world: you just need to choose your solution.



Gear unit

IE4 NEMA Efficiency Super Premium
IE3 NEMA Premium Efficiency
IE2 NEMA High Efficiency
IE1 NEMA Standard Efficiency


IEC adapter



BSR...E



BXN



BX




BE



BN

Compact adapter



MXN



MNN

Complete your solution



S2U, S2U IP66



Agile



Active Cube



ANG



AxiaVert



AEC

Regenerative Inverters



BMX



BMC



DGM



DGM Modular

Motion Controller



Induction
technology



Reluctance
technology

PRODUCT OVERVIEW

STANDARDS & DIRECTIVES

European standard

Standards

EVOX platform motors are manufactured according to the following standards:

EN	IEC	Standard description
EN 60034-1	IEC 60034-1	Rating and performance
EN 60034-2-1	IEC 60034-2-1	Standard methods for determining losses and efficiency from tests
EN IEC 60034-5	IEC 60034-5	Degrees of protection provided by the integral design of rotating electrical machines (IP code) - Classification
EN 60034-6	IEC 60034-6	Methods of cooling (IC Code)
EN IEC 60034-7	IEC 60034-7	Classification of types of construction, mounting arrangements and terminal box position (IM Code)
EN 60034-8	IEC 60034-8	Terminal markings and direction of rotation
EN 60034-9	IEC 60034-9	Noise limits
EN 60034-11	IEC 60034-11	Thermal protection
EN 60034-12	IEC 60034-12	Starting performance of single-speed three-phase cage induction motors
EN IEC 60034-14	IEC 60034-14	Mechanical vibration of certain machines with shaft heights 56 mm and higher - Measurement, evaluation and limits of vibration severity
EN 60034-30-1	IEC 60034-30-1	Efficiency classes of line operated AC motors (IE code)
EN IEC 63000	IEC 63000	Technical documentation for the assessment of electrical and electronic products with respect to the restriction of hazardous substances

Main directives

BXN, MXN and MNN motors meet the requirements of Directives 2014/35/EU (LVD - Low Voltage Directive), the 2014/30/EU (EMC - Electromagnetic Compatibility Directive), the 2009/125/EC (ERP - Energy Related Products Directive) and 2011/65/EU (RoHS – Restriction of Hazardous Substances) and their nameplates bear the CE mark.

As for the EMC Directive, construction is in accordance with standards EN 61000-6-2 (Generic standards - Immunity for industrial environments), EN 61000-6-4 (Generic standards - Emission standard for industrial environments).

This product should not be mixed with general household waste.

Disposal has to be carried out in conformity with Directive 2012/19/EU, where established, and in accordance to national regulations. They should be disposed of in accordance with any other legislation in force through the country.



Capacitive filter

Motors with FD brakes, when fitted with the suitable capacitive filter at rectifier input (option CF).

Ventilation

Motors are externally ventilated (IC 411) according to EN 60034-6 and are equipped with a plastic cooling fan working in both directions.

Motors must be installed allowing access for maintenance purposes on motor and brake, if supplied. For other cooling devices, please see the options section in this catalogue.

Noise

Noise levels, measured using EN ISO 1680, within the maximum levels specified in standard EN 60034-9.

Vibration balancing

Rotor shaft is balanced with half key fitted, and falls within vibration class N, as standard EN 60034-14.

The responsibility for final product safety and compliance with applicable directives rests with the manufacturer or the assembler who incorporate the motors as component parts.

Other international requirements

BXN, MXN and MNN motors can be sold in the most important markets worldwide such as Europe, UK, USA, Canada, China, Brazil, India, Russia, Australia and New Zealand.

UKCA conformity

BXN, MXN and MNN motors comply with the directives applicable in the United Kingdom, and carry the nameplate with the UKCA logo (United Kingdom Conformity Assessed mark).



EAC conformity

All Bonfiglioli motors comply with the EAC (EurAsian Conformity) regulations of the Eurasian Economic Customs Union of Russia, Kazakhstan and Belarus.

GEMS and EECA conformity

BXN, MXN and MNN motors meet the requirements of the Australia Greenhouse and Energy Minimum Standards (GEMS) regulator and the New Zealand Energy Efficiency and Conservation Authority (EECA).

UL conformity

BXN, MXN and MNN motors comply with the requirements for the American and Canadian markets and carry the nameplate with UL logo.



INMETRO conformity

BXN and MXN motors with WD3 or WD4/WD10 winding comply with the INMETRO requirements for the Brazilian market, and come with an additional label.



BIS conformity

BXN and MXN motors with active BIS option* comply with Bureau of Indian Standard requirements for the Indian market, and include the nameplate with ISI logo.



CCC/CEL conformity*

BXN and MXN motors with CN option* active, comply with the requirements for the Chinese market and include, where applicable, the nameplate with CCC logo and/or the CEL label.



*The motor must be configured with the global motor option (CN).

PRODUCT OVERVIEW

POWER OUTPUT DEPENDING ON THE AMBIENT TEMPERATURE

Standard motors are class F and can work with an ambient temperature from -15°C to 40°C.
There is a reduction in power output with ambient temperature above 40°C.

Ambient temperature [°C]	40	45	50	55	60
P / P _N	1,00	0,97	0,94	0,90	0,86

POWER OUTPUT DEPENDING ON THE ALTITUDE

Performance given in the catalogue is valid at an altitude lower than 1000 metres above sea level.
There is a reduction in power output at altitude above 1000 above sea level.

Altitude a.s.l. [m]	0 - 1000	1500	2000	2500	3000	3500	4000
P / P _N	1,00	0,97	0,92	0,88	0,84	0,80	0,76

TERMINAL BOX

EVOX motors have 9 studs as standard. A ground terminal is also supplied for earthing of the equipment.
Wiring instructions are provided either in the box and in the user manual.
Terminals number and type are shown in the following table:

IEC	Compatto	No. Of terminals	Terminal threads
BXN 63 ... BXN 112	MXN 05 ... MXN 35 MNN 05 MNN 20	9	M4
BXN 132	MXN 40		

CABLE ENTRY

The holes used to bring cables to the terminal boxes use metric threads in accordance with standard EN 50262 as indicated in the following table:

IEC	Compatto	Cable gland and dimensions	Maximum cable diameter allowed [mm]
BXN 63	MXN 05 MNN 05	2 x M20 x 1.5	13
		2 x M16 x 1.5	10
		1 x M16 x 1.5	10
BXN 71 ... BXN 112	MXN 10 ... MXN 35 MNN 10 ... MNN 20	2 x M25 x 1.5	17
		2 x M16 x 1.5	10
		1 x M16 x 1.5	10
BXN 132	MXN 40	2 x M32 x 1.5	21
		2 x M16 x 1.5	10
		1 x M16 x 1.5	10



BEARINGS

Life lubricated preloaded radial ball bearings are used on our motors. The bearing types are shown in the following table:

IEC	DE	NDE	
		Without brake	With brake
BXN 63	6201 2Z C3	6201 2Z C3	6201 2Z C3
BXN 71	6202 2Z C3	6202 2Z C3	6202 2Z C3
BXN 80	6204 2Z C3	6204 2Z C3	6204 2Z C3
BXN 90	6205 2Z C3	6205 2Z C3	6205 2Z C3
BXN 100	6206 2Z C3	6206 2Z C3	6206 2Z C3
BXN 112	6306 2Z C3	6306 2Z C3	6306 2Z C3
BXN 132	6308 2Z C3	6308 2Z C3	6308 2Z C3

Compatto	DE	NDE	
		Without brake	With brake
MXN 05	6301 2Z C3	6201 2Z C3	6201 2Z C3
MXN 10	6302 2Z C3	6202 2Z C3	6202 2Z C3
MXN 20	6304 2Z C3	6204 2Z C3	6204 2Z C3
MXN 25	6205 2Z C3	6205 2Z C3	6205 2Z C3
MXN 30	6206 2Z C3	6206 2Z C3	6206 2Z C3
MXN 35	6306 2Z C3	6306 2Z C3	6306 2Z C3
MXN 40	6308 2Z C3	6308 2Z C3	6308 2Z C3

Calculated endurance lifetime L10h, as per ISO 281, in unloaded condition, exceeds 40000 hrs.

DE = drive end


NDE = non drive end

PRODUCT OVERVIEW

PRODUCT MODULARITY



Lots of e-motor versions available to perfectly **match** your application needs.

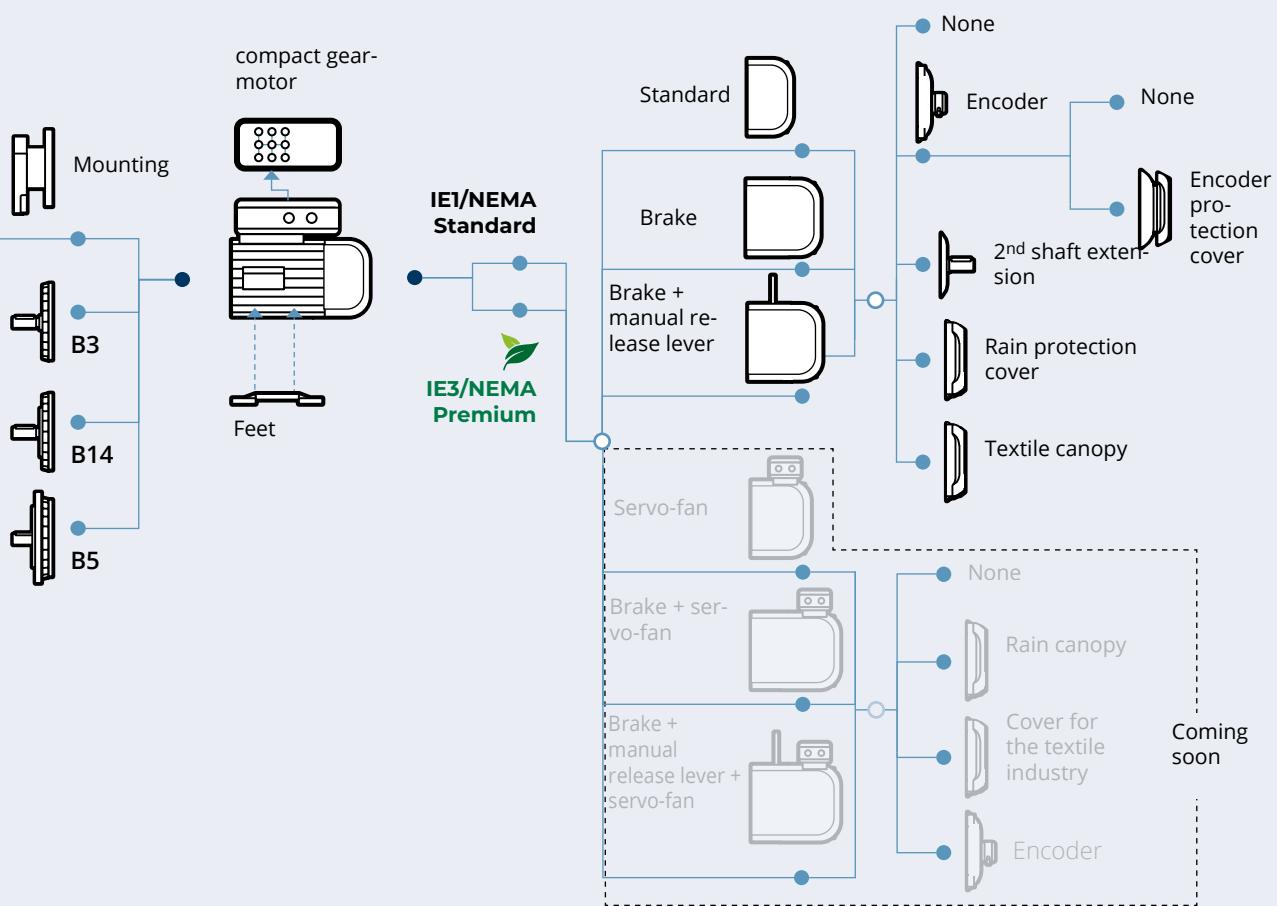


DC brake are available.

Suitable applications



Smart Conveyor

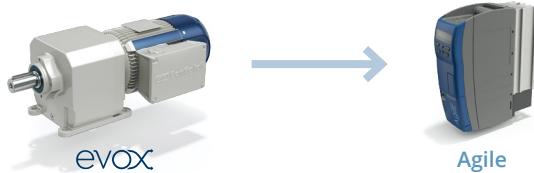


Features	Benefits
Advanced and accurate sensorless vector control providing high starting torque at low speed	Reducing current consumption at starting phase
Built-in PLC functions	Smart Conveyor programming without PLC
Standby mode	Energy saving
Integrated monitoring tool	Inverter failure prevention and diagnostics analysis




Wrapping Machine



Features	Benefits
Sensorless accurate control or closed-loop advanced vectorial control	Wrapping Machine progressive start and stop
PI control with advanced derivative control	Optimized film tension control
Configurable position and speed control via parameters	Variable lifting speed and up/down controls
Built-in PLC functions	Wrap cycle adjustment
Possible sync between several drives	Machine can operate without any PLC

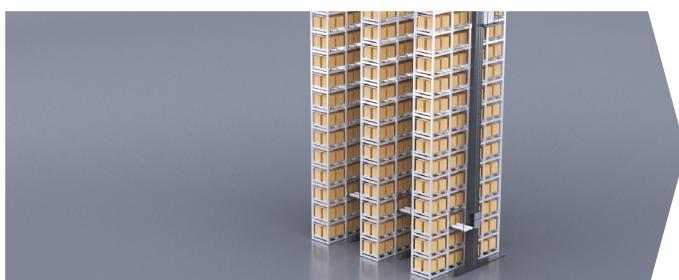

Vertical automatic storage

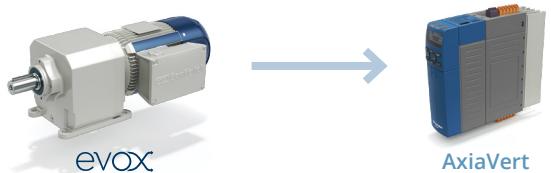

Features	Benefits
SBC (Safety Brake Control)	Minimized application risks
Sensor-connected ready	Scheduled maintenance-ready
See Bonfiglioli BMC 	To be connected to Motion Controller (CSP mode)
All EVOX encoders are compatible with AxiaVert	• Machine complete integration • Single supplier
iOS & Desktop user-friendly application and Bluetooth/Wi-Fi inverter connection	Flexible application • Plug & Play solution • Easy troubleshooting

DESIGNATION

Asynchronous E-motor series


BXN Stand alone motor IE3/NEMA Premium

MXN Integrated Motor IE3/NEMA Premium

MNN Integrated Motor IE1/NEMA Standard

* The “Winding frequency” field is only present in case of FD brake with direct supply (DIR)


NAMEPLATE DESIGNATION

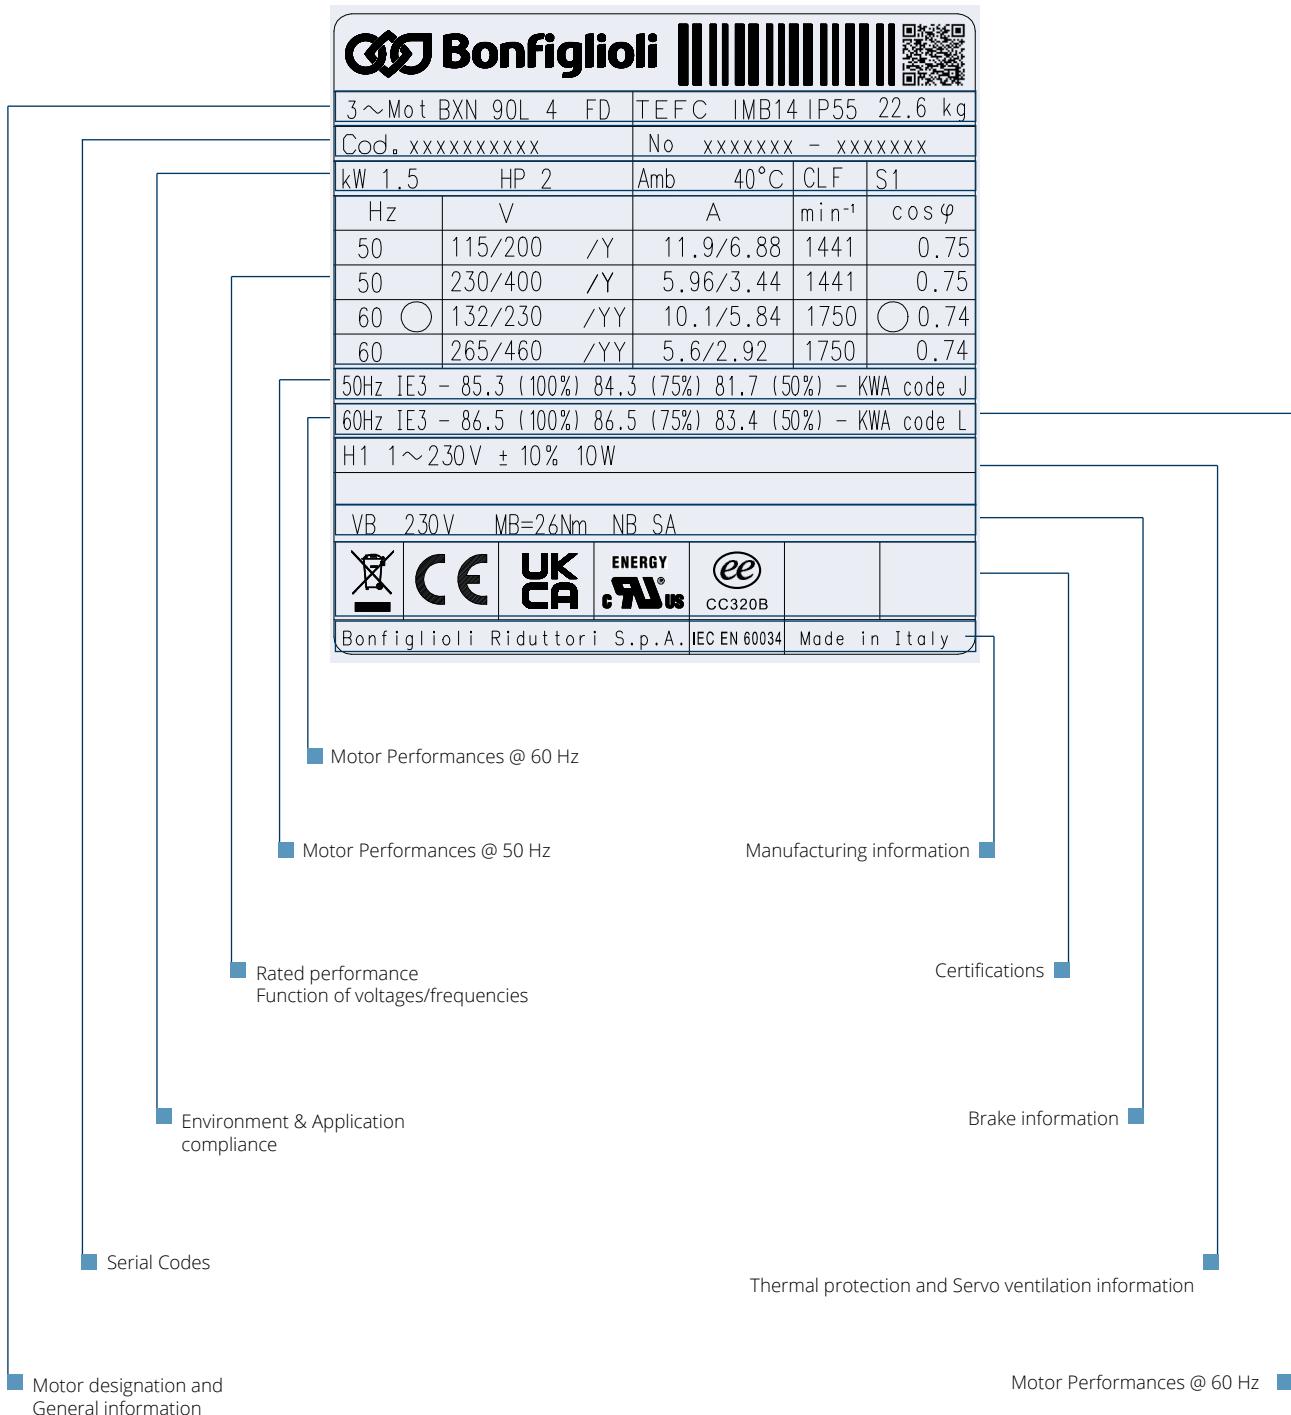

WINDING


Terminal box 9 PIN arrangement


Rotation is possible in both directions. If terminals U1, V1, and W1 are connected to line phases L1, L2 and L3, clockwise rotation (from drive end) is obtained. For counter clockwise rotation, switch two phases.

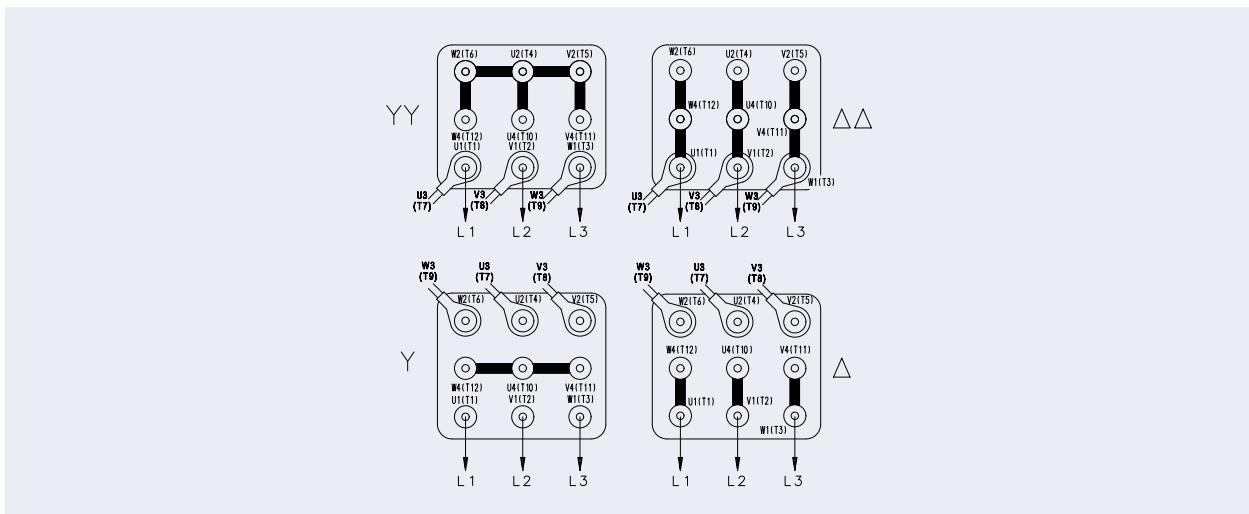

All EVOX motors are designed according to standard 60034-1, which states that a motor must be able to operate continuously in zone A within $\pm 5\%$ of rated voltage and $\pm 2\%$ of rated frequency, guaranteeing rated torque. Operation is also guaranteed in Zone B within a range of $\pm 10\%$ of rated voltage and over a range of $+3 / -5\%$ of frequency, but the machine may have performance deviations or overtemperatures exceeding those at rated voltage within the $\pm 5\%$ range.

According to the standard, prolonged operation at the limits of zone B at $\pm 10\%$ is not recommended. For out-of-tolerance operation, temperature may exceed the limit provided in the relevant insulation class by 10 K.

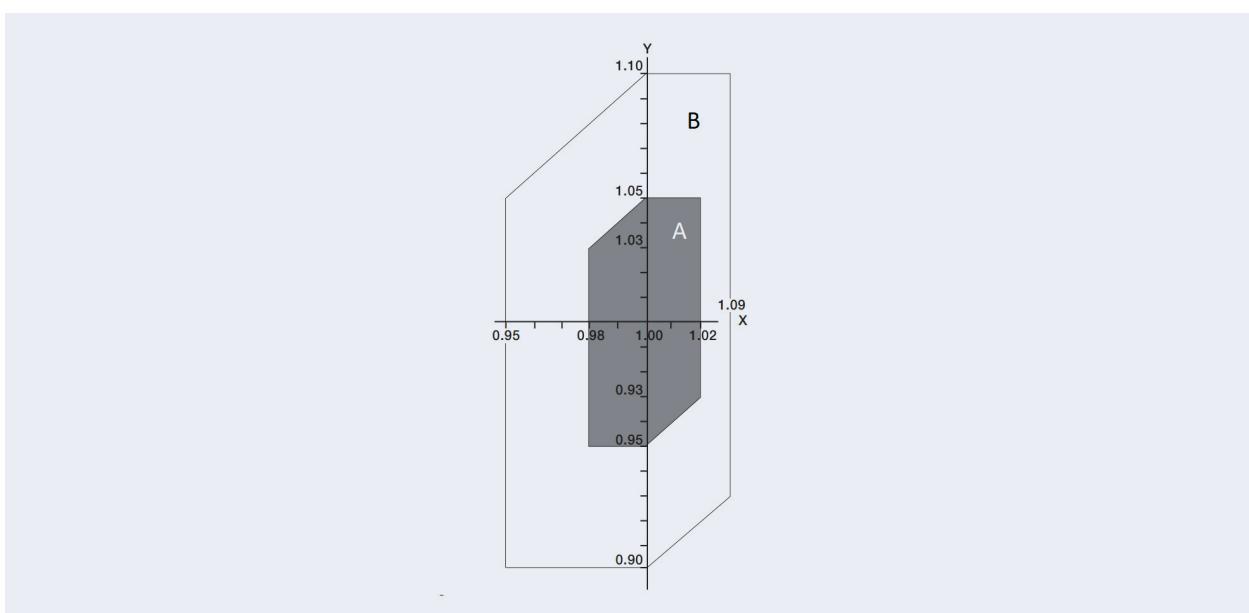

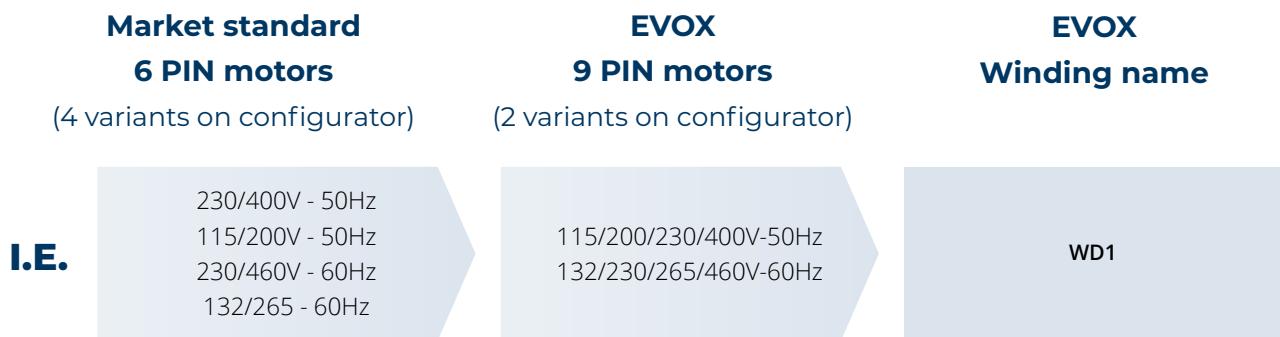


Product selector Winding - Voltage/Frequency correspondences

IEC 63-80 or compact 05-20		IEC 90-112 or compact 25-35		Higher than IEC 132 or compact 40	
Winding	Motor supply {V}	Frequency [Hz]	Winding	Motor supply {V}	Frequency [Hz]
	ΔΔ YY Δ Y			ΔΔ YY Δ Y	
WD1	115 200 230 400	50	WD1	115 200 230 400	50
	132 230 265 460	60		132 230 265 460	60
—			WD2	200 346 400 690	50
				230 400 460 —	60
WD3	110 190 220 380	50	WD3	110 190 220 380	50
	127 220 255 440	60		127 220 255 440	60
WD4	95 165 190 330	50	WD4	95 165 190 330	50
	110 190 220 380	60		110 190 220 380	60
WD5	120 208 240 415	50	WD5	120 208 240 415	50
	140 240 280 480	60		140 240 280 480	60
—			WD6	208 360 415 720	50
				240 415 480 —	60
WD7	147 255 290 500	50	WD7	147 255 290 500	50
	165 290 330 575	60		165 290 330 575	60

OPERATION WITH INVERTER POWER SUPPLY

Bonfiglioli electric motors can be used with PWM inverter power supply, and rated voltage at converter input up to 500 V. Typical torque/speed characteristics in S1 duty for motor with base frequency $f_b = 50$ Hz are given in the table below. For operating frequencies below approx. 30 Hz, due to the ventilation reduction, the torque of standard self-ventilated motors (IC411) must be properly derated or, alternatively, they must be equipped with independent servofan. For frequencies above the basic frequency, when the maximum inverter output voltage has been reached, the motor operates in a constant power operating range, with torque at the shaft that decreases approx. with the ratio (f/f_b) . As the maximum torque of the motor decreases approx. with $(f/f_b)^2$, the permissible overload margin must be progressively reduced.

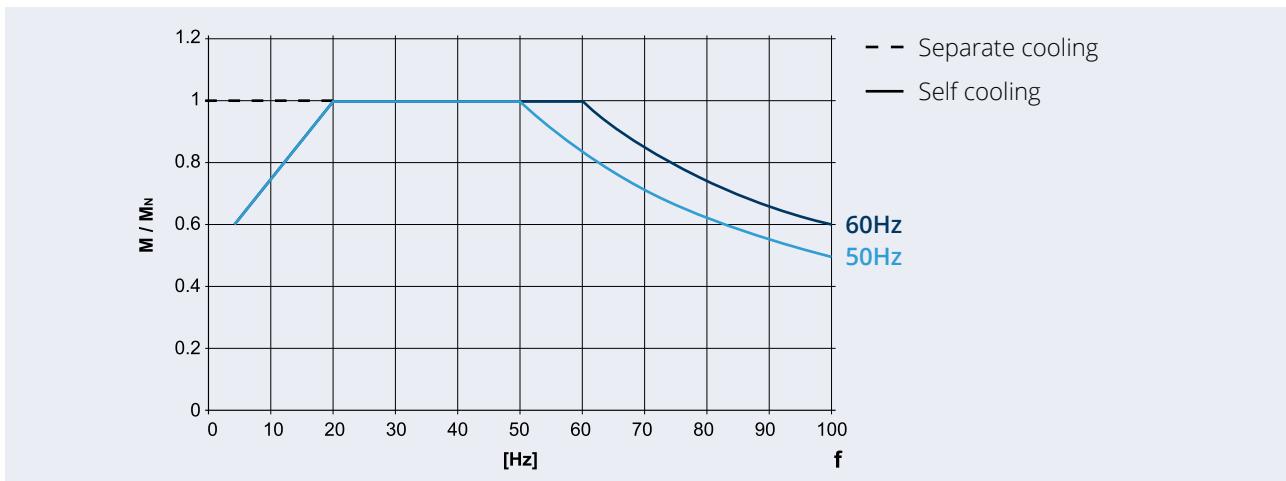

For operation above the rated frequency, the mechanical limit speed of the motors is given in the following table:

	n [min^{-1}]
	4p
BXN 63 - BXN 132	4000

At speeds above the rated speed, the motors have more mechanical vibration and ventilation noise; for these applications, a grade B rotor balance is recommended.

The electromagnetic brake, if any, must always be powered separately from the motor power supply.

PROTECTION CLASS

IPxx

Index of protection

The IP – index of protection – shows the protection rate of the device from any external agents. It is composed of IP and 2 numbers, which show:

- the first digit describes the degree of protection rate against solid objects, dust, the solid particles and bodies.
- the second digit describes the degree of protection offered against liquids.

Solids Particles < 50 mm	Solids Particles < 12.5 mm	Solids Particles < 2.5 mm	Solids Particles < 1 mm	Solidi Dust protection	Solidi Dust seal		
1	2	3	4	5	6		
Water Vertical drip- ping water	Water Dripping water < 15°	Water Spraying water	Water Spraying water	Water Water jet	Water Pressure water jet	Water Immersion < 1 meter	Water Immersion ≥ 3 meters
Low level of protection			Standard level of protection			High level of protection	

Standard motors are designed to IP55 degree of protection and IP54 in case of brake motors.
They can be installed in dusty or humid environments.

IP examples:


- IP54: • Protection against dust deposits • Protected against spray water
- IP55: • Protection against dust deposits • Protection against water jets from any direction
- IP56: • Protection against dust deposits • Protection against powerful water jets from any direction

DESIGNATION

INSULATION CLASS

NEMA motor insulation classes describes the ability of motor insulation in the windings to handle heat (Ref. IEC 60085 and IEC 60034-1). There are four insulation classes in use namely: A, B, F, and H. All four classes identify the allowable temperature rise from an ambient temperature of 40° C (104° F). Classes B and F are the most common in many applications.

Temperature rise (T) and maximum temperatures at hot spots (Tmax) for insulation classes (IEC 60034-1).

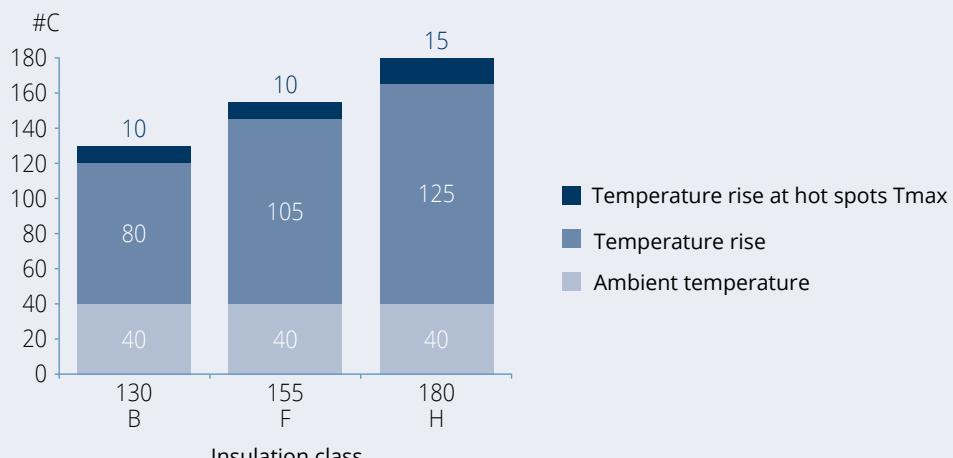

CL F

Class F insulation

Bonfiglioli electric motors have been designed as standard with a class F insulation system (enamelled wire, insulators, impregnation resins). In standard motors, stator winding overtemperature normally remains below the 80 K limit corresponding to class B overtemperature. Class F allows temperature increases of 105 K (measured by the resistance variation method) and maximum temperatures of 155°C in motor hot spots.

A careful selection of insulating components makes the motors compatible with tropical climates and normal vibration. For applications involving the presence of aggressive chemicals or high humidity, contact Bonfiglioli Engineering for assistance with product selection.

CL H

Class H insulation


This option can be selected to achieve class H insulation level. Class H allows temperature increases of 125 K (measured with the resistance variation method) and maximum temperatures at motor hot positions of 180°C.

VERSIONS


Motor Versions – IEC motors (BXN)

BXN motors are available in the design versions as indicated in the table below as per Standards EN 60034-7. Motor reporting on nameplate the standard mounting position can be mounted in the position illustrated in the following table:


B3

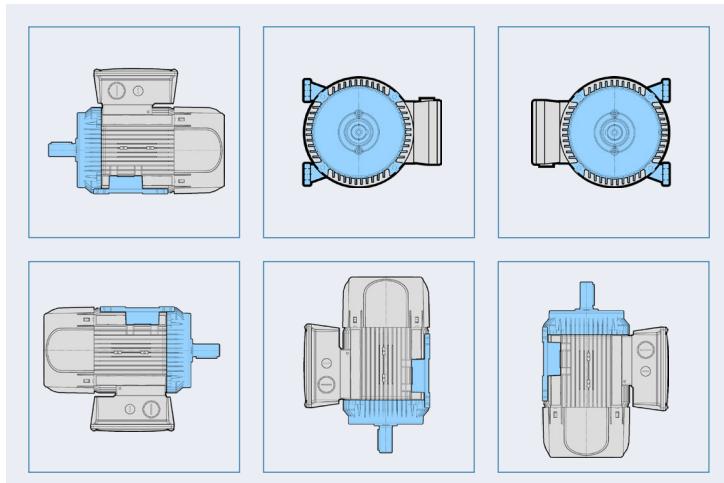

B5

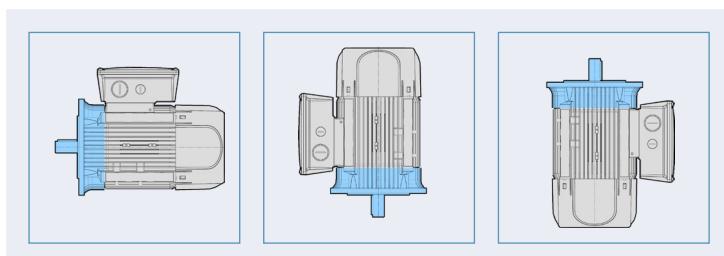

B14

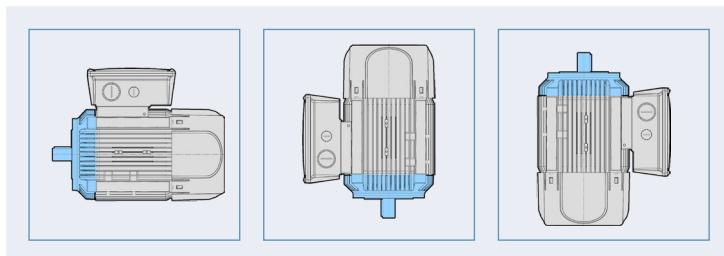

B3 mounting can be combined with B5 or B14 thus becoming B35 in the first case and B34 in the second one.

For outdoor applications where the motor is mounted with the output shaft facing downwards, the selection of rain protection cover (RC) option is recommended.

In this case, specify this request during the ordering phase, because it is not present in standard motor versions.

Motor Versions – Integrated motors (MXN, MNN)

In case a compact motor of the EVOX platform (MXN and MNN) is configured as a stand-alone product, please refer to the following list:

Motor series	Motor size	CP gear unit size	Coupling
MXN/MNN	05MA - 25L	≤ 47	C
		> 47	L
	30LA - 40M	≥ 47	C

PERFORMANCE


EVOX ELECTRIC MOTOR

Tables introduction

Motor designation		Output power		Output speed n_1	Inertia		η		Torque		Weight		
IEC	Compact	P_{n1}	[kW]	[HP]	[rpm]	[kgm ²]	[%]	[%]	[%]	T_N	T_S/T_N	T_A/T_N	IEC B5
BXN 63MA 4	MXN 05MA 4	0.12	0.16	1,407	1.82	52.5	60.3	64.8	0.8	2.9	1.7	4.6	
BXN 63MB 4	MXN 05MB 4	0.18	0.25	1,373	2.92	63.3	68.8	69.9	1.3	3.1	1.8	5.7	

Rated Voltage V_N - Different winding executions

Motor designation		380 V				400 V				415 V			
IEC	Compact	cosφ	IN	I_S/I_N	KVA	cosφ	IN	I_S/I_N	KVA	cosφ	IN	I_S/I_N	KVA
BXN 63MA 4	MXN 05MA 4	0.61	0.48	3.4	H	0.58	0.47	3.4	H	0.57	0.46	3.4	H
BXN 63MB 4	MXN 05MB 4	0.61	0.65	3.5	G	0.61	0.61	3.5	G	0.62	0.59	3.5	G

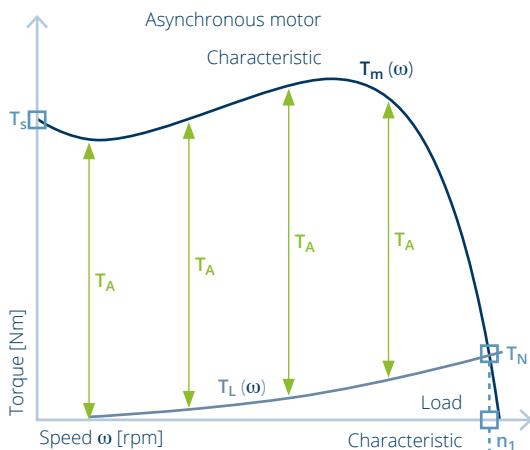



$T_A = \text{Acceleration torque}$

The T_A indicated in this catalogue is calculated with a finite element method because it is dependent from the Load Characteristic and the time.

$$T_a(t) = T_m(t) - T_L(t) = \frac{\delta \omega}{\delta t}$$

(J is the motor + load inertia, both reduced at the output motor shaft)

T_A in this catalogue is calculated without a Load Characteristics and with only the EVOX motor inertia.

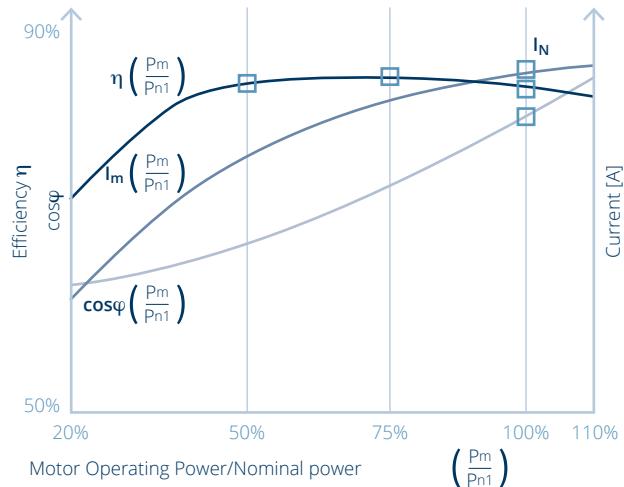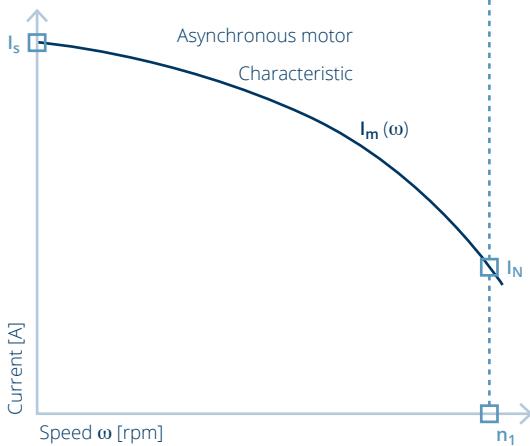

Please, refer to [Configuration Guidelines & Setup](#) section before the motor configuration, in order to select the correct Power.

Tolerances

As per CEI EN 60034-1 standards, the tolerances below apply to the following quantities.

Tolerance rule	Tolerance parameter
-0.15 (1 - η) P≤50kW	η
-(1 - cosφ)/6 min 0.02 max 0.07	cosφ
±20%*	Slip
+20%	I _s
-15% +25%	T _s
-10%	Max torque

(*) ≤30% for motors with P_n < 1kw

Coefficient code for locked-rotor KVA - Nameplate marking

KVA coefficient is a good solution to compare the inrush of different manufactures' motors than % inrush current. The reason being that if a motor has a high full load current, the % inrush will be lower than a motor with the same inrush current but a lower full load current.

Letter designation	KVA per horsepower*	Letter designation	KVA per horsepower*
A	0 - 3.15	L	9.0 - 10.0
B	3.15 - 3.55	M	10.0 - 11.2
C	3.55 - 4.0	N	11.2 - 12.5
D	4.0 - 4.5	P	12.5 - 14.0
E	4.5 - 5.0	R	14.0 - 16.0
F	5.0 - 5.6	S	16.0 - 18.0
G	5.6 - 6.3	T	18.0 - 20.0
H	6.3 - 7.1	U	20.0 - 22.4
J	7.1 - 8.0	V	22.4 and up
K	8.0 - 9.0		

(*) the KVAs defined as horsepower range include the lower figure up to, but not including, the higher figure.

To determinate KVA per HP, use the following formula:

$$\frac{\text{KVA}}{\text{P}_{\text{n}1} \text{ [express in HP]}} \quad \text{where KVA} = V_n \cdot I_s \cdot \frac{\sqrt{3}}{1000}$$

PERFORMANCE

EVOX ELECTRIC MOTOR

Performance Table – 50Hz

IE3/NEMA Premium - 400 V - 50 Hz - 4 poles

Motor designation		Output power P _{n1}	Output speed n ₁	Inertia J _m x10 ⁻⁴	η			Torque			Weight [kg]	
IEC	Compact				50%	75%	100%	T _N	T _{S/TN}	T _{A/TN}		
		[kW]	[HP]	[rpm]	[kgm ²]	[%]	[%]	[%]	[Nm]			
BXN 63MA 4	MNX 05MA 4	0.12	0.16	1,407	1.82	52.5	60.3	64.8	0.8	2.9	1.7	4.6
BXN 63MB 4	MNX 05MB 4	0.18	0.25	1,373	2.92	63.3	68.8	69.9	1.3	3.1	1.8	5.7
BXN 71MA 4	MNX 10MA 4	0.25	0.33	1,388	6.28	67.9	72.8	73.5	1.7	1.6	2.4	6.5
BXN 71MB 4	MNX 10MB 4	0.37	0.50	1,419	9.70	70.8	76.0	77.3	2.5	2.6	2.5	8.3
BXN 80MA 4	MNX 20MA 4	0.55	0.75	1,447	17.78	77.4	80.9	80.8	3.6	1.9	1.6	10.7
BXN 80MB 4	MNX 20MB 4	0.75	1.00	1,451	28.89	82.5	85.1	82.5	4.9	2.4	2.0	14.4
BXN 90S 4	MNX 25S 4	1.1	1.50	1,448	31.76	83.5	85.9	84.1	7.3	2.4	3.4	15.6
BXN 90L 4	MNX 25L 4	1.5	2.00	1,441	34.96	81.7	84.3	85.3	9.9	2.6	2.4	16.6
BXN 100LA 4	MNX 30LA 4	2.2	3.00	1,458	90.01	86.3	88.4	86.7	14.4	3.4	2.3	29.5
BXN 100LB 4	MNX 30LB 4	3.0	4.00	1,452	90.01	86.2	88.0	87.7	19.7	3.2	3.0	29.5
BXN 112M 4	MNX 35M 4	4.0	5.40	1,453	105.43	87.1	88.8	88.6	26.3	2.7	2.8	35.1
BXN 132S 4	MNX 40S 4	5.5	7.50	1,478	497.42	90.0	91.4	89.6	35.6	4.0	3.4	67.9
BXN 132M 4	MNX 40M 4	7.5	10.00	1,473	497.42	89.5	91.0	90.4	48.6	3.7	3.2	67.9

380 V				400 V				415 V					
Motor designation		Current		KVA		Current		KVA		Current		KVA	
IEC	Compact	cosφ	IN	I _{S/I_N}	Code	cosφ	IN	I _{S/I_N}	Code	cosφ	IN	I _{S/I_N}	Code
			[A]					[A]					
BXN 63MA 4	MNX 05MA 4	0.61	0.48	3.4	H	0.58	0.47	3.4	H	0.57	0.46	3.4	H
BXN 63MB 4	MNX 05MB 4	0.61	0.65	3.5	G	0.61	0.61	3.5	G	0.62	0.59	3.5	G
BXN 71MA 4	MNX 10MA 4	0.73	0.71	4.8	H	0.74	0.67	4.8	H	0.73	0.65	4.8	H
BXN 71MB 4	MNX 10MB 4	0.65	1.12	6.3	L	0.66	1.05	6.3	L	0.63	1.06	6.3	L
BXN 80MA 4	MNX 20MA 4	0.73	1.40	6.1	J	0.75	1.31	6.1	J	0.73	1.29	6.1	J
BXN 80MB 4	MNX 20MB 4	0.78	1.71	7.4	K	0.78	1.63	7.4	K	0.79	1.56	7.4	K
BXN 90S 4	MNX 25S 4	0.78	2.51	7.3	J	0.78	2.38	7.3	J	0.77	1.33	7.3	J
BXN 90L 4	MNX 25L 4	0.75	3.59	6.7	J	0.75	3.44	6.7	J	0.75	3.31	6.7	J
BXN 100LA 4	MNX 30LA 4	0.80	4.68	8.8	L	0.81	4.42	8.8	L	0.81	4.28	8.8	L
BXN 100LB 4	MNX 30LB 4	0.81	6.39	8.1	K	0.80	6.14	8.1	K	0.80	5.93	8.1	K
BXN 112M 4	MNX 35M 4	0.83	8.31	7.6	J	0.82	7.97	7.6	J	0.82	7.70	7.6	J
BXN 132S 4	MNX 40S 4	0.77	11.70	11.4	N	0.79	11.00	9.8	L	0.79	10.60	9.8	L
BXN 132M 4	MNX 40M 4	0.78	15.90	10.9	N	0.79	15.10	9.2	L	0.79	14.60	9.2	L

IE1/NEMA Standard - 400 V - 50 Hz - 4 poles

Motor designation		Output power P _{n1}	Output speed n ₁	Inertia J _m x10 ⁻⁴	η			Torque			Weight [kg]	
IEC	Compact				50%	75%	100%	T _N	T _{S/TN}	T _{A/TN}		
		[kW]	[HP]	[rpm]	[kgm ²]	[%]	[%]	[%]	[Nm]			
MNN 05MA 4	MNX 05MA 4	0.12	0.16	1,340	1.80	45.8	52.4	50.0	0.9	2.0	1.5	4.5
MNN 05MB 4	MNX 05MB 4	0.18	0.25	1,330	2.00	49.9	56.5	57.0	1.3	2.5	1.3	4.8
MNN 05MC 4	MNX 05MC 4	0.25	0.33	1,317	2.92	60.4	65.5	61.5	1.8	2.6	1.4	5.7
MNN 10MA 4	MNX 10MA 4	0.25	0.33	1,375	4.58	58.0	65.4	61.5	1.7	1.5	1.8	5.6
MNN 10MB 4	MNX 10MB 4	0.37	0.50	1,368	6.28	65.4	70.8	66.0	2.6	1.5	1.6	6.5
MNN 10MC 4	MNX 10MC 4	0.55	0.75	1,360	7.99	67.9	72.7	70.0	3.9	1.8	1.5	7.4

380 V				400 V				415 V					
Motor designation		Current		KVA		Current		KVA		Current		KVA	
IEC	Compact	cosφ	IN	I _{S/I_N}	Code	cosφ	IN	I _{S/I_N}	Code	cosφ	IN	I _{S/I_N}	Code
			[A]					[A]					
MNN 05MA 4	MNX 05MA 4	0.71	0.47	2.6	F	0.68	0.47	2.6	F	0.68	0.45	2.6	F
MNN 05MB 4	MNX 05MB 4	0.67	0.70	2.7	F	0.64	0.69	2.7	F	0.62	0.68	2.7	F
MNN 05MC 4	MNX 05MC 4	0.65	0.91	2.9	F	0.67	0.85	2.9	F	0.67	0.82	2.9	F
MNN 10MA 4	MNX 10MA 4	0.73	0.78	3.9	G	0.70	0.77	3.9	G	0.69	0.75	3.9	G
MNN 10MB 4	MNX 10MB 4	0.75	1.07	4.3	G	0.74	1.03	4.3	G	0.74	0.99	4.3	G
MNN 10MC 4	MNX 10MC 4	0.75	1.57	4.3	G	0.75	1.49	4.3	G	0.75	1.44	4.3	G



Performance Table – 60Hz

IE3/NEMA Premium - 460 V - 60 Hz - 4 poles

IEC	Motor designation	Motor designation		Output power P _{n1}	Output speed n ₁	Inertia J _m J x10 ⁻⁴	η			Torque		Weight [kg]
		IEC	Compact				50%	75%	100%	T _N	T _{S/T_N}	
				[kW]	[HP]	[rpm]	[kgm ²]	[%]	[%]		[Nm]	
BXN 63MA 4	MXN 05MA 4	0.12	0.16	1,724		1.82	54.2	62.2	66.0	0.7	3.8	2.7
BXN 63MB 4	MXN 05MB 4	0.18	0.25	1,719		2.92	65.0	71.1	69.5	1.0	3.9	3.0
BXN 71MA 4	MXN 10MA 4	0.25	0.33	1,706		6.28	68.5	74.1	73.4	1.4	1.8	2.1
BXN 71MB 4	MXN 10MB 4	0.37	0.50	1,731		9.70	70.7	76.6	78.2	2.0	3.1	4.4
BXN 80MA 4	MXN 20MA 4	0.55	0.75	1,755		17.76	77.7	82.1	81.1	3.0	2.2	10.7
BXN 80MB 4	MXN 20MB 4	0.75	1.00	1,757		28.85	82.3	85.8	85.5	4.1	2.7	3.0
BXN 90S 4	MXN 25S 4	1.1	1.50	1,754		31.76	83.5	86.6	86.5	6.0	2.7	15.6
BXN 90L 4	MXN 25L 4	1.5	2.00	1,750		35.11	83.4	86.5	86.5	8.2	2.8	2.4
BXN 100LA 4	MXN 30LA 4	2.2	3.00	1,765		90.01	87.1	89.6	89.5	11.9	3.8	2.8
BXN 100LB 4	MXN 30LB 4	3.0	4.00	1,761		90.01	87.1	89.5	89.5	16.3	3.6	4.4
BXN 112M 4	MXN 35M 4	3.7	5.00	1,762		105.43	86.6	89.2	89.5	20.1	3.1	3.3
BXN 132S 4	MXN 40S 4	5.5	7.50	1,779		497.42	89.0	91.1	91.7	29.5	5.0	4.0
BXN 132M 4	MXN 40M 4	7.5	10.00	1,777		497.42	89.1	91.1	91.7	40.3	4.5	3.8
												67.9


IEC	Motor designation	380 V				460 V				575 V			
		Current		KVA		Current		KVA		Current		KVA	
		cosφ	IN	I _S /I _N	Code	cosφ	IN	I _S /I _N	Code	cosφ	IN	I _S /I _N	Code
			[A]				[A]				[A]		
BXN 63MA 4	MXN 05MA 4	0.52	0.53	4.1	L	0.52	0.44	4.1	L	0.51	0.35	4.1	L
BXN 63MB 4	MXN 05MB 4	0.56	0.67	4.7	K	0.55	0.56	4.7	K	0.51	0.48	4.7	K
BXN 71MA 4	MXN 10MA 4	0.70	0.72	6.0	K	0.70	0.59	6.0	K	0.71	0.47	6.0	K
BXN 71MB 4	MXN 10MB 4	0.60	1.19	7.7	N	0.61	0.96	7.7	N	0.60	0.79	7.7	N
BXN 80MA 4	MXN 20MA 4	0.71	1.41	7.3	K	0.72	1.15	7.3	K	0.75	0.88	7.3	K
BXN 80MB 4	MXN 20MB 4	0.77	1.71	8.8	L	0.76	1.43	8.8	L	0.75	1.16	8.8	L
BXN 90S 4	MXN 25S 4	0.77	1.33	7.3	J	0.75	2.10	8.5	L	0.75	2.10	8.5	L
BXN 90L 4	MXN 25L 4	0.75	3.50	8.3	L	0.74	2.92	8.3	L	0.74	2.34	8.3	L
BXN 100LA 4	MXN 30LA 4	0.79	4.72	10.5	M	0.79	3.89	10.5	M	0.78	3.14	10.5	M
BXN 100LB 4	MXN 30LB 4	0.79	6.46	9.8	M	0.78	5.37	9.8	M	0.77	4.34	9.8	M
BXN 112M 4	MXN 35M 4	0.79	7.96	9.3	L	0.78	6.59	9.3	L	0.78	5.30	9.3	L
BXN 132S 4	MXN 40S 4	0.77	11.70	11.4	N	0.77	9.72	11.4	N	0.77	7.78	11.4	N
BXN 132M 4	MXN 40M 4	0.78	15.90	10.9	N	0.78	13.20	10.9	N	0.78	10.60	10.9	N

IE1/NEMA Standard - 460 V - 60 Hz - 4 poles

IEC	Motor designation	Motor designation		Output power P _{n1}	Output speed n ₁	Inertia J _m J x10 ⁻⁴	η			Torque		Weight [kg]
		IEC	Compact				50%	75%	100%	T _N	T _{S/T_N}	
				[kW]	[HP]	[rpm]	[kgm ²]	[%]	[%]		[Nm]	
MNN 05MA 4	MNN 05MA 4	0.12	0.16	1,687		1.8	48.1	55.2	62.0	0.7	2.7	2.2
MNN 05MB 4	MNN 05MB 4	0.18	0.25	1,669		2.0	52.0	59.2	66.0	1.0	3.4	1.9
MNN 05MC 4	MNN 05MC 4	0.25	0.33	1,672		2.9	63.1	68.9	68.0	1.4	3.6	2.1
MNN 10MA 4	MNN 10MA 4	0.25	0.33	1,696		4.6	59.6	67.0	68.0	1.4	1.8	2.8
MNN 10MB 4	MNN 10MB 4	0.37	0.50	1,694		6.3	66.8	72.6	70.0	2.1	1.8	2.6
MNN 10MC 4	MNN 10MC 4	0.55	0.75	1,689		8.0	70.5	75.4	74.0	3.1	2.2	2.4
												7.4

IEC	Motor designation	380 V				460 V				575 V			
		Current		KVA		Current		KVA		Current		KVA	
		cosφ	IN	I _S /I _N	Code	cosφ	IN	I _S /I _N	Code	cosφ	IN	I _S /I _N	Code
			[A]				[A]				[A]		
MNN 05MA 4	MNN 05MA 4	0.60	0.52	3.4	J	0.59	0.43	3.4	J	0.59	0.35	3.4	J
MNN 05MB 4	MNN 05MB 4	0.54	0.81	3.5	J	0.56	0.65	3.5	J	0.56	0.52	3.5	J
MNN 05MC 4	MNN 05MC 4	0.58	0.92	3.9	J	0.59	0.76	3.9	J	0.60	0.60	3.9	J
MNN 10MA 4	MNN 10MA 4	0.65	0.84	4.8	J	0.66	0.68	4.8	J	0.66	0.55	4.8	J
MNN 10MB 4	MNN 10MB 4	0.70	1.09	5.4	J	0.69	0.91	5.4	J	0.69	0.73	5.4	J
MNN 10MC 4	MNN 10MC 4	0.70	1.58	5.6	J	0.69	1.31	5.6	J	0.67	1.08	5.6	J



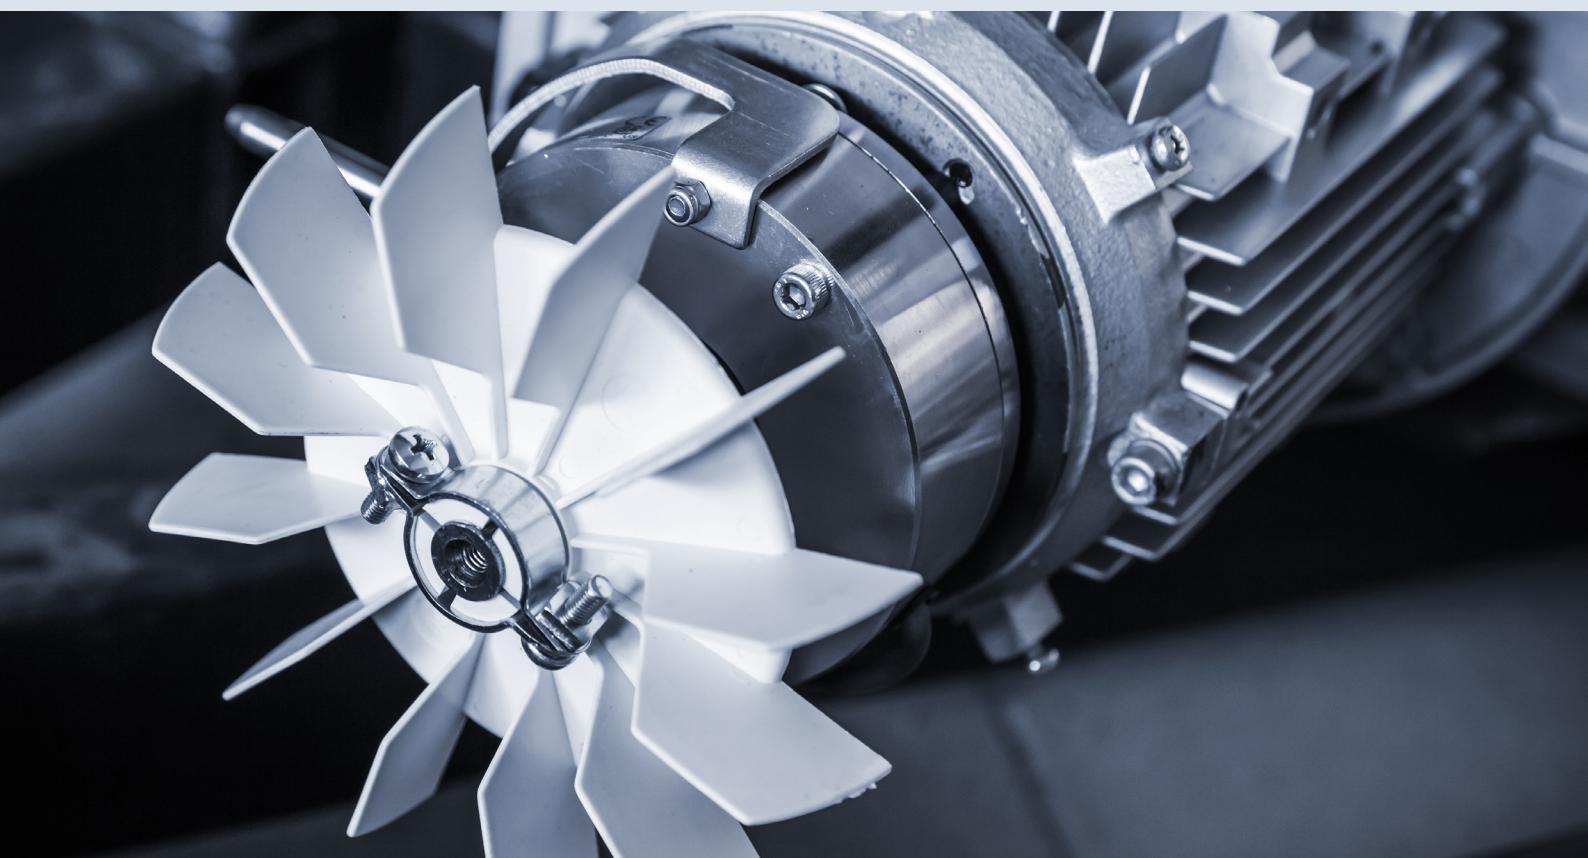

BRAKE | EVOX ELECTRIC MOTOR

BRAKE OPTION LIST



BRAKE | EVOX ELECTRIC MOTOR

BRAKE PERFORMANCE

Tables introduction

The legend identifies the following parameters:

- Brake designation
- Brake release time with half-wave rectifier
- Brake release time with over-energizing rectifier
- Brake engagement time with AC line interruption and separate power supply
- Brake engagement time with AC & DC line interruption
- Brake power absorption @ 20 °C
- Max energy per brake operation
- Braking energy between two successive air gap adjustments
- Maximum permitted starts per hour at zero resistant torque and intermittent cycle of 50%

Motor designation	Brake Release Braking					Wmax	Z ₀	Inertia Weight	Configurable static brake torques*																		
	IEC	Compact	ID	t ₁	t _{1s}	t ₂	t _{2c}	P	10 s/h	100 s/h	1000 s/h	W	NB	SB	Jx10 ⁻⁴	IEC B5	1.8	2.5	3.5	5	7.5	10	13	15	20	26	40
BXN	MXN					ms		W	KJ	MJ	[1/h]	[kgm ²]	[kg]														
63MA 4	05MA 4	FD02	30	15	80	9	17	4.5	1.4	0.18	15	8,900	11,000	2.4	6.3	•											

[Values calculated at maximum braking torque, average air gap and brake setting 230/400 V - 50 Hz]

* Max brake torque tolerance ±15%

- Available brake torque
- Coppia raccomandata



Performance Table – DC Brake

Motor designation		Brake Release Braking Wmax Z ₀ (50Hz) Z ₀ (60Hz) Inertia Weight										Configurable static brake torques*																					
IEC	Compact	ID	t ₁	t _{1s}	t ₂	t _{2c}	P	10 s/h	100 s/h	1000 s/h	W	NB	SB	NB	SB	Jx10 ⁻⁴	IEC B5	1.75	2.5	3.5	5	7.5	10	13	15	20	26	40	50	60	100		
BXN		ms W KJ MJ [1/h] [1/h] [kgm ²] [kg]																								Nm							
MXN																																	
63MA 4	05MA 4	FD02	30	15	80	9	17	4.5	1.4	0.18	15	8,900	11,000	8,900	11,000	2.4	6.3	●															
63MB 4	05MB 4	FD02	30	15	80	9	17	4.5	1.4	0.18	15	7,000	9,000	7,000	9,000	3.5	7.4		●														
71MA 4	10MA 4	FD53	60	30	100	12	24	7	1.9	0.23	25	5,700	8,100	5,700	8,100	7.4	9.2			●													
71MB 4	10MB 4	FD53	60	30	100	12	24	7	1.9	0.23	25	6,400	9,900	6,400	9,900	10.8	11.0			●													
80MA 4	20MA 4	FD04	80	35	140	15	33	10	3.1	0.35	30	2,500	5,200	2,500	5,200	19.8	14.6				●												
80MB 4	20MB 4	FD04	80	35	140	15	33	10	3.1	0.35	30	2,000	4,100	2,000	4,100	30.8	18.3					●											
90S 4	25S 4	FD05	130	65	170	20	45	18	4.5	0.50	50	2,800	6,600	2,800	6,600	35.8	21.6						●										
90L 4	25L 4	FD05	130	65	170	20	45	18	4.5	0.50	50	1,400	3,100	1,400	3,100	39.1	22.6						●										
100LA 4	30LA 4	FD15	430	65	170	20	45	18	4.5	0.50	50	1,400	2,400	520	1,400	94.0	36.5							●									
100LB 4	30LB 4	FD15	430	65	170	20	45	18	4.5	0.50	50	2,000	3,700	-	890	94.0	36.5							●									
112M 4	35M 4	FD06S	-	80	220	25	55	20	4.8	0.55	70	-	1,400	-	780	114.4	45.1																
132S 4	40S 4	FD06	-	100	250	20	65	29	7.4	0.80	80	-	750	-	600	520.4	80.9																
132M 4	40M 4	FD06	-	100	250	20	65	29	7.4	0.80	80	-	570	-	420	520.4	80.9																

Motor designation		Brake Release Braking Wmax Z ₀ Inertia Weight										Configurable static brake torques*																			
IEC	Compact	ID	t ₁	t _{1s}	t ₂	t _{2c}	P	10 s/h	100 s/h	1000 s/h	W	NB	SB	Jx10 ⁻⁴	IEC B5	1.75	2.5	3.5	5	7.5	10	13	15	20	26	40					
MNN		ms W KJ MJ [1/h] [1/h] [kgm ²] [kg]																								Nm					
MXN																															
05MA 4	05MA 4	FD02	30	15	80	9	17	4.5	1.4	0.18	15	8,000	10,000	2.1	5.9	●															
05MB 4	05MB 4	FD02	30	15	80	9	17	4.5	1.4	0.18	15	6,400	8,200	2.4	6.3		●														
05MC 4	05MC 4	FD02	30	15	80	9	17	4.5	1.4	0.18	15	5,700	7,300	3.5	7.4			●													
10MA 4	10MA 4	FD53	60	30	100	12	24	7	1.9	0.23	25	9,900	14,000	5.7	8.3				●												
10MB 4	10MB 4	FD53	60	30	100	12	24	7	1.9	0.23	25	5,600	8,800	7.4	9.2					●											
10MC 4	10MC 4	FD53	60	30	100	12	24	7	1.9	0.23	25	3,300	6,700	9.1	10.1																

* Max brake torque tolerance ±15%

Available brake torque

Suggested torque



BRAKE | EVOX ELECTRIC MOTOR

BRAKE OPTION LIST DEEP DIVE


Permissible starts per hour, Z

The rating charts of brakemotors lend the permitted number of starts Z_0 , based on 50% intermittence and for unloaded operation. The catalogue value represents the maximum number of starts per hour for the motor without exceeding the rated temperature for the insulation class F. To give a practical example for an application characterized by inertia J_c , drawing power P_r and requiring mean torque at start-up M_L the actual number of starts per hour for the motor can be calculated approximately through the following equation:

$$Z = \frac{Z_0 \cdot K_c \cdot K_d}{K_J}$$

where:

$K_J = \frac{J_m + J_c}{J_m}$	inertia factor
$K_c = \frac{M_a - M_L}{M_a}$	torque factor
$K_d =$	load factor, see the following table

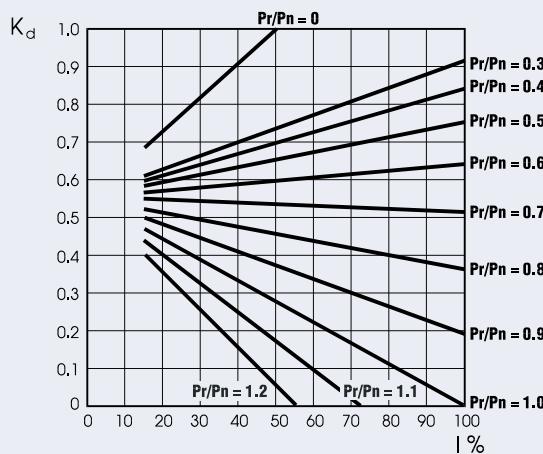


If actual starts per hour is within permitted value (Z) it may be worth checking that braking work is compatible with brake (thermal) capacity W_{max} .

Asynchronous brake motors

Standard electric motors can be equipped with a brake thus creating a self-braking motor. The brake helps in situation where it is necessary a quickly and safely stop of the machine. The Bonfiglioli .

All brakes are designed to provide *fail-safe* operation, meaning that they are applied by spring action in the event of power failure.

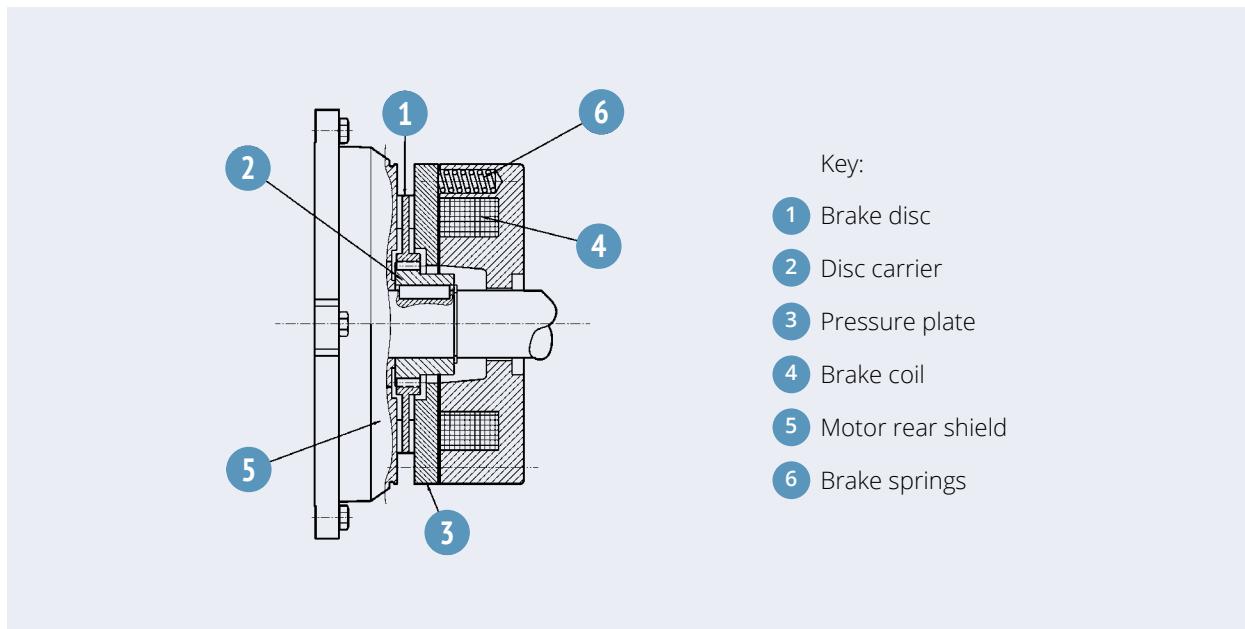

In case of power failure, pressure springs push the reinforcement plate against the brake disc. The disc is trapped between the reinforcement plate and the motor shield, thus stopping shaft rotation. When coil is energised, a magnetic field - strong enough to overcome spring action - attracts the reinforcement plate. The brake disc, which is integral with the motor shaft, is thus released.

Brake type selection

FD brakes [DC brake power supply]: they are suitable for applications where a smooth, progressive, dynamic, silent and soft reaction time is requested.

Cases	Motor power supply	Brake coil power supply	Brake power supply designation	Braking system
1		Connected to the terminal box of the motor	DIR	FD + rectifier
2	CA	Dedicated AC	SA	FD + rectifier
3		Dedicated DC	SD	FD

BRAKE | EVOX ELECTRIC MOTOR

BRAKE OPTION LIST DEEP DIVE

Brake type


FD

DC brake type


Direct current toroidal-coil electromagnetic brake bolted onto the motor shield. Preloading springs provide axial positioning of magnet body. Brake disc slides axially on steel hub shrunk onto motor shaft with anti-vibration device. Brake torque factory setting is indicated in the corresponding motor rating charts. Braking torque may be modified by changing the type and/or number of springs. If requested, the motors may be equipped with a manual release lever with automatic return (R) or a system for holding the brake in the released position (RM). See variant in paragraph "BRAKE RELEASE SYSTEMS" for available release lever locations. FD brakes ensure excellent dynamic performance with low noise. DC brake operating characteristics may be optimized to meet the application requirements by choosing from the various rectifier/power supply and wiring connection options available.

For applications involving lifting and/or high hourly energy dissipation, [contact Bonfiglioli's Technical Service](#)

IP54

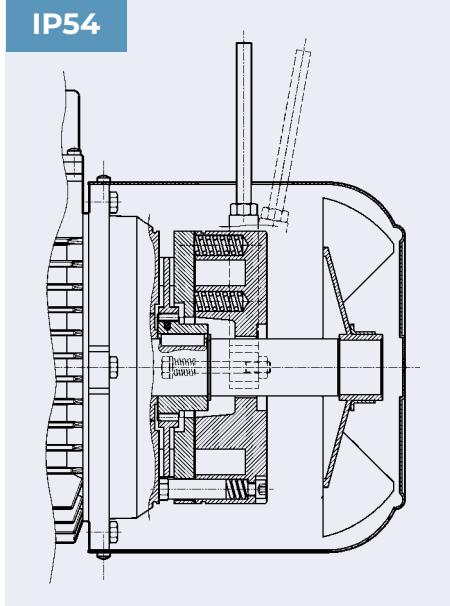

IP55

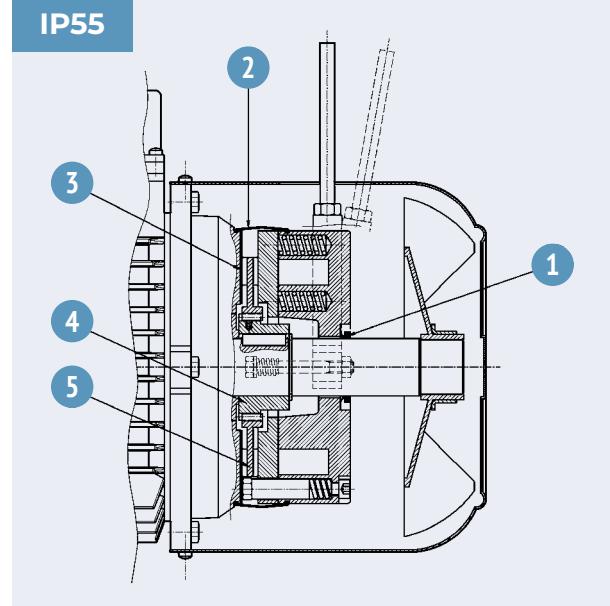

BXN, MXN and MNN brake motors comes with an IP54 protection degree as standard and it is possible to configure them with an IP55 as an option. If **IP55** is selected, the following construction variants will be applied:

- 1 V-ring at N.D.E. of motor shaft
- 2 Dust and waterproof rubber seal
- 3 Stainless steel ring placed between motor shield and brake disc
- 4 Stainless steel hub
- 5 Stainless steel brake disc

For FD technical specifications, refer to the [performance section](#)

OPTIONS | BRAKE

AC/DC rectifier type

The FD brake coil can be directly fed with DC current or by an AC/DC connection operated by a diode half-wave rectifier ($V_{DC} \approx 0,45 \times V_{AC}$). A rectifier is a circuit that converts the Alternating Current (AC) input power into a Direct Current (DC) output power. Evox products are available in versions NB and SB, as detailed in the table below:



	Brake	Standard		At request
BXN 63	FD 02			
BXN 71	FD 03 - FD 53			
BXN 80	FD 04			
BXN 90S	FD 14			
BXN 90L	FD 05			
BXN 100	FD 15			
BXN 112	FD 06S			
BXN 132	FD 56 - FD 06 - FD 07			

(*) $t_{2c} < t_{2r} < t_2$

NB

Simple half-wave rectifiers

Rectifier **NB** lets just one half of each complete AC supply wave through, to transform it into a DC supply. The brake release response time is reduced.

SB

Double half-wave rectifiers:

Rectifier **SB** with electronic energizing control over-energizes the electromagnet upon power-up to cut brake release response times and then switches to normal half-wave operation once the brake has been released.

Use of the **SB** rectifier is mandatory in the event of:

- High number of operations per hour
- Reduced brake release response times
- Brake exposed to extreme thermal stress

BRAKE | EVOX ELECTRIC MOTOR

OPTIONS | BRAKE

Brake hand release systems

Spring-applied brakes type FD may be equipped with optional manual release devices. These are typically used for manually releasing the brake before servicing any machine or system parts operated by the motor.

Availability of the various disengagement devices is indicated below:

R	RM
BXN_FD	BXN 63 ... BXN 132

R


Lever with return spring

With this options, the return spring brings the release lever back in the original position.

RM

Lever with a release blocked position

On brake motors type FD, if the RM option is specified, the release device may be locked in the "release" position by tightening the lever until its end engages with a brake housing projection.

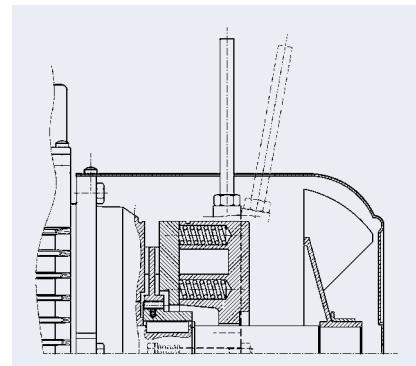


Brake hand release lever position

AA

Release lever orientation

Unless otherwise specified, the release lever is located 90° away from the terminal box – identified by letters [AB] in the diagram on the right – in a clockwise direction on both R and RM options.

Alternative lever positions [AA], [AC] and [AD] are also possible when the corresponding option is specified.



MORE ON BRAKE OPTIONS

Separate brake supply

DIR

Direct brake supply

The brake system is directly powered through the electric motor terminal board power supply

SA

Brake AC separate power supply

The brake coil is directly powered through an independent line, separated from the motor one.

FD-NB/SB-SA: the rated AC voltage which powers the rectifier must be specified. E.g. SA 400 (V AC)

SD

Brake DC separate power supply

The brake coil is directly powered with a DC current and the rectifier is not present.

The rated coil voltage must be specified, E.g. SD 24 (V DC).

Brake supply

230

FD brake power supply

A rectifier installed inside the terminal box feeds the DC brake coil. Wiring connection across rectifier and brake coil is performed as factory standard.

On all single-pole motors, the rectifier is connected to the motor terminal board.

Brake power supply voltage is indicated in the following table, regardless of the mains frequency:

FD-SD brake supply voltages

4P	Motor supply	Braking system supply	Voltage (V CC)
BXN 63 ... BXN 132	More options depending on the chosen winding and frequency	The brake coil is directly powered with DC	24
			48
			56
			74
			90
			100
			110
			150
			180

Configurable for motors with 50HZ and 60HZ power supply

BRAKE | EVOX ELECTRIC MOTOR

MORE ON BRAKE OPTIONS

FD-SA brake supply voltages

4P	Motor supply	Braking system supply	Voltage (V AC)
BXN 63 ... BXN 132	More options depending on the chosen winding and frequency	The brake rectifier is powered with a separate AC	110
			115
			120
			127
			132
			165
			200
			208
			220
			230
			240
			330
			380
			400
			415
			440
			460

Configurable for motors with 50HZ and 60HZ power supply

FD brake connection

For switch-pole motors, and where a separate brake power supply is required, connection to rectifier must comply with brake winding voltage stated in the motor nameplate.

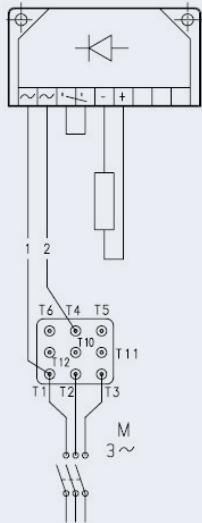
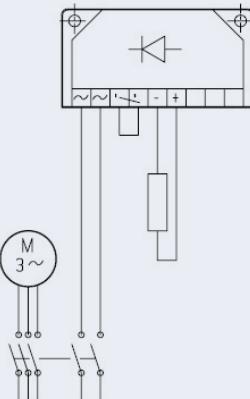
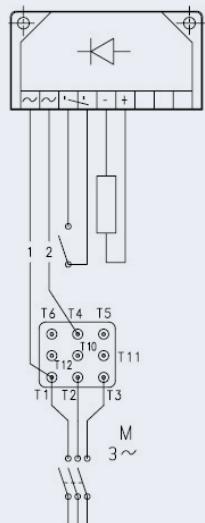
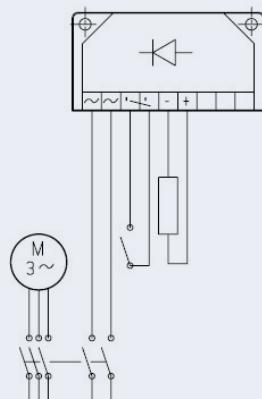
Because of the inductive load type, brake control and DC line interruption must use contacts from usage class AC-3 to IEC 60947-4-1.

Table (1) – Brake coil with direct power supply, the brake activates when the AC line is interrupted.

Table (2) – Brake coil with separate power supply, a.c. line interruption.

Table (3) – Brake coil with direct power supply, the brake activates when the AC and DC lines are interrupted.

Table (4) – Brake coil with separate power supply, a.c. and d.c. lines interruption.

Table (1)
FD DIRTable (2)
FD SATable (3)
FD DIRTable (4)
FD SA

Capacitive filter

CF

Capacitive filter


An optional capacitive filter is available for brake motors type FD only. When the suitable capacitive filter is installed upstream of the rectifier (option CF), motors comply with the emission limits required by standard EN6100-6-3:2007 "Electromagnetic compatibility (EMC) - Generic standards - Part 6-3: Emission standard for residential, commercial and light-industrial environments".

Essentially, the capacitive filter absorbs some of the electromagnetic waves interference so that the motor will be suitable for light industrial, residential and commercial applications.

Brake connection when equipped with the CF option:


Motors with FD brake, when fitted with the suitable capacitive filter at rectifier input (option CF), meet the emission limits required by Standard EN 61000-6-3:

«Electromagnetic compatibility - Generic Emission Standard - Part 6.3: Residential, commercial and light industrial environments»

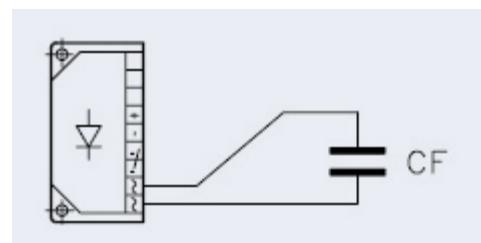

OPTIONS | EVOX ELECTRIC MOTOR SIDE

OPTION DESIGNATION - EVOX MOTORS

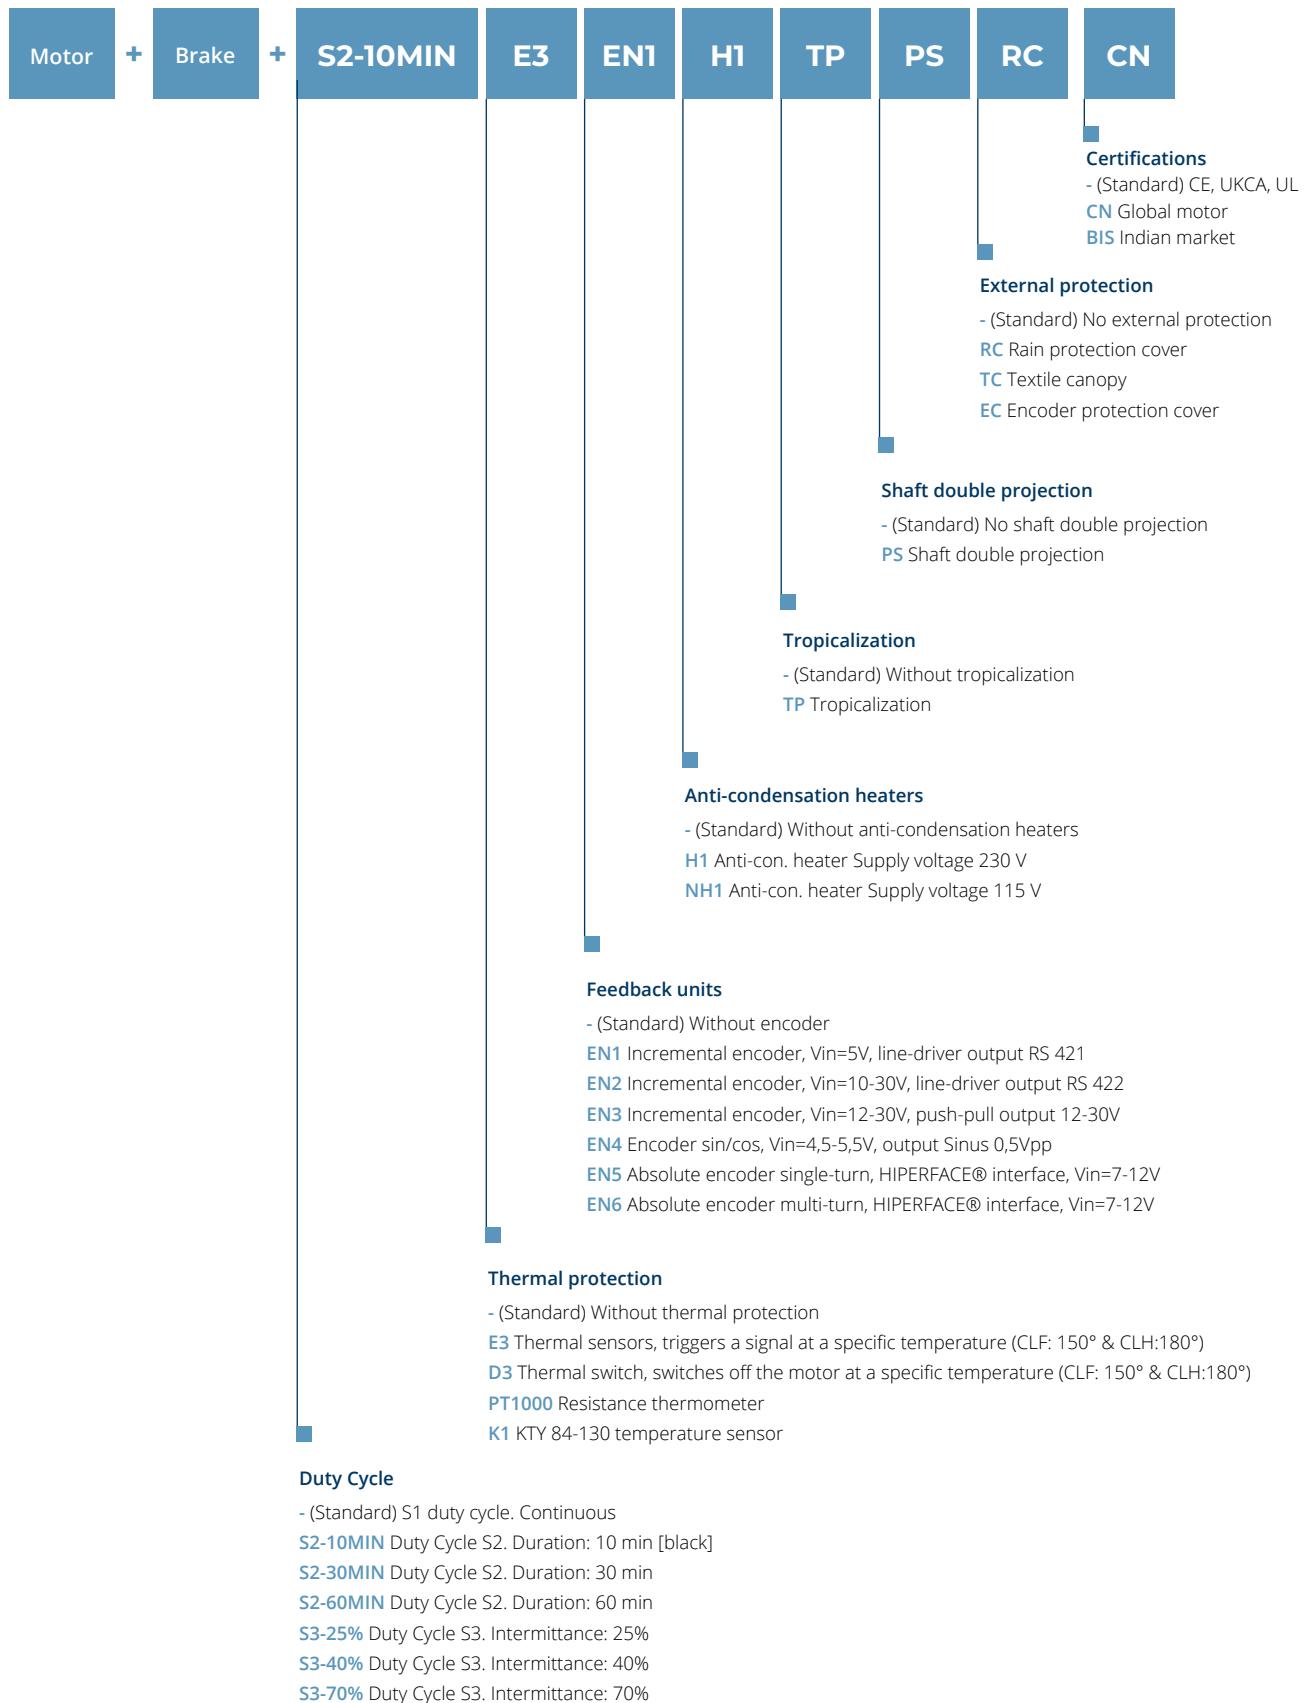

... ⁽¹⁾	+	AC	RAL5010	C3
				<p>Surface protection</p> <ul style="list-style-type: none"> - (Standard) C2 protection <p>C3 C4</p> <p>For C5 according to UNI EN ISO 12944-2, please contact our Technical Customer Support for further details</p>

Painting

- (Standard) not painted
- RAL7042** Traffic Grey A
- RAL5010** Gentian Blue
- RAL9005** Jet Black
- RAL9006** White aluminium
- RAL9010** Pure White
- RAL7035** Light Grey
- RAL7001** Silver Grey
- RAL7037** Dusty Grey
- RAL5015** Sky Blue
- RAL5024** Pastel blue

Certificates

- (Standard) Without certificate
- AC** Gear unit compliance certificate
- ACM** Motor compliance certificate
- CC** Inspection certificate

(1) Those options are available for Gear Units, Gearmotors, Gear brake motors, Stand alone motors and Stand alone Brake motors

OPTIONS | EVOX ELECTRIC MOTOR SIDE


OPTION DETAIL

Duty Cycle

Unless specified, catalogue motor power refers to continuous duty S1. Any different condition has to be classified in the correct Duty Cycle, according with CEI EN 60034-1.

S2...MIN

S2 Duty Cycle (Limited duration duty)




This type of duty is characterized by operation at a constant load for a limited time t_f , which is shorter than the time required to reach thermal balance, followed by an idle period t_r where the motor can return to the ambient temperature.

The duration of the duty cycle is: $D=t_f+t_r$

t_f = operating time under constant load
 t_r = idle period

S3...%

S3 Duty Cycle (Periodical intermittent duty)



This type of duty is characterized by a sequence of identical operation cycles formed by a constant load operation and an idle period.

For this type of duty, the starting current does not significantly affect overtemperature.

t_f = operating time under constant load
 t_r = idle period
 t_c = cycle time

$$I = \frac{t_f}{t_f + t_r} \cdot 100 \quad t_f = \text{operating time under constant load} \\ t_r = \text{idle period}$$

For a S2 & S3 duty cycle motor, the required motor power should be multiplied by the coefficient reported in the following table.

	Service Duty						
	S2			S3			S4 - S9
	D (min)			Intermittance (%)			
	10	30	60	25%	40%	70%	
f_m	1.35	1.15	1.05	1.25	1.15	1.1	Contact us

If cycles from S2 to S9 are chosen, the motor nameplate will be marked with the cycle name, an increased power rating and electrical data to suit the type of duty.

For further details, please [contact Bonfiglioli's Technical Service](#)

Thermal protection

In addition to the standard protection provided by the magneto-thermal device, motors can be supplied with built-in thermal probes to protect the winding against overheating caused by severe and demanding application or by an insufficient ventilation of the environment.

This additional protection is highly recommended on servo-ventilated motors (IC416).

E3

Thermistors

These are semi-conductors having rapid resistance variation when they are close to the rated switch off temperature (150°C for CLF or 180° for CLH insulation class). Variations of the $R=f(T)$ characteristic are specified under DIN 44081, IEC 34-11 Standards. Positive temperature coefficient thermistors are normally used (also known as PTC "cold conductor resistors"). Usually this kind of thermal protection is easy to be found on inverters.

Thermistors cannot control relays directly and must be connected to a suitable disconnect device. Thus protected, three PTCs connected in series are installed in the winding, the terminals of which are located on the auxiliary terminal-board.

D3

Bimetallic thermostats

These types of protective devices house a bimetal disk. Bimetal switches operate on the principle of mechanical deformation as a result of long-term heating. Bimetal strips bent as a result of such heating have a spring action that results in sudden reversal of the curvature (concave to convex or vice-versa).

When the rated switch off temperature (150°C for CLF or 180° for CLH insulation class) is reached, these temperature detectors (NC contacts) can deactivate an auxiliary circuit. The circuit can only be reclosed following a considerable fall in temperature. Three bimetallic thermostats connected in series are usually employed, with normally closed contacts. The terminals are located on an auxiliary terminal-board.

Bimetal switches are suitable protection devices in the case of slowly rising motor temperatures. When the motor current rises quickly (e.g. with a locked rotor), these switches are not suitable due to their large thermal time constants.

OPTIONS | EVOX ELECTRIC MOTOR SIDE

OPTION DETAIL


PT1000

Resistance thermometer

The resistance thermometer has a chip for a temperature sensor, the resistance of which changes in relation to temperature according to a series of reproducible basic values. The changes in resistance are transferred as changes in current.

At 0 °C, the measurement resistances are adjusted to 1000 Ω for the Pt1000 and correspond to the accuracy class B (i.e. the relationship between resistance and temperature). The limit deviation is ±0.3 °C, and the admissible deviations are defined in EN 60751. The Pt1000 resistance thermometer will, in the future, gradually replace the KTY84-130 temperature sensors available today. The relationship between the temperature and the electrical resistance of conductors is utilized in the Pt1000 to measure the temperature, just like with the additional resistance thermometers described above. Pure metals undergo larger changes in resistance than alloys and have a relatively constant temperature coefficient.

°C	Ω	°C	Ω
-40	843	110	1,423
-30	882	120	1,461
-20	922	130	1,498
-10	961	140	1,536
0	1,000	150	1,573
10	1,039	160	1,611
20	1,078	170	1,648
30	1,117	180	1,685
40	1,155	190	1,722
50	1,194	200	1,759
60	1,232	210	1,795
70	1,271	220	1,832
80	1,309	230	1,868
90	1,347	240	1,905
100	1,385	250	1,941

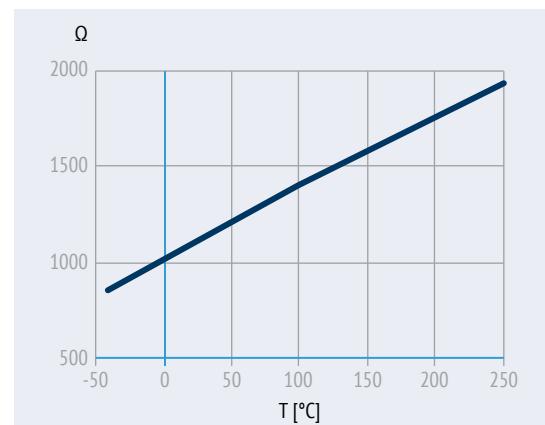


K1

KTY 84-130 temperature sensor

The design characteristics of this sub-group of PTC thermistors allow them to be used as positive temperature coefficient sensors with variable resistance. Functioning temperature range: 0°C ... +260°C. Within the measuring range, however, the KTY 84-130 characteristic rises almost linearly. The temperature sensor is embedded in the winding overhang of the motor in the same way as the components mentioned above. It is characterized by its outstanding precision, high reliability, and temperature stability, as well as a fast response time. Thanks to these properties, which permit the almost analogue monitoring of winding temperature, the KTY 84-130 is preferred for converter operation. Thermistors cannot control relays directly and must be connected to a suitable disconnect device. Terminals (polarized) for 1 x KTY 84-130 are provided on an auxiliary terminal strip.

°C	Ω min	Ω max	°C	Ω min	Ω max
0	474	522	130	1,152	1,235
10	514	563	140	1,216	1,309
20	555	607	150	1,282	1,385
25	577	629	160	1,350	1,463
30	599	652	170	1,420	1,544
40	645	700	180	1,492	1,628
50	694	750	190	1,566	1,714
60	744	801	200	1,641	1,803
70	797	855	210	1,719	1,894
80	852	912	220	1,798	1,988
90	910	970	230	1,879	2,085
100	970	1,030	240	1,962	2,184
110	1,029	1,096	250	2,046	2,286
120	1,089	1,164	260	2,132	2,390

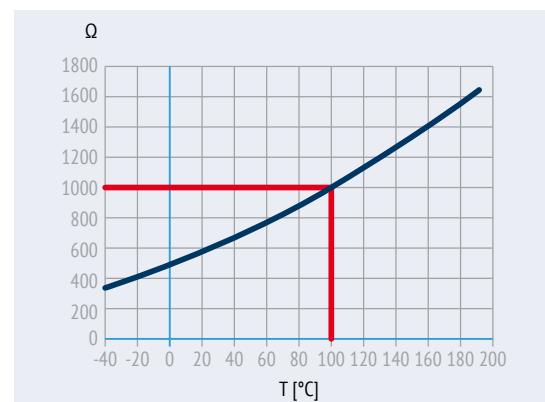

Feedback units

Motors can be combined with six different types of encoders in order to achieve feedback circuits. The installation requires an expansion module which depends on the type of the encoder selected.

Configurations with double-extended shaft (PS) and rain/fabric canopy (RC, TC) are not compatible with encoder installation.

EN1

Incremental encoder

These encoders are speed sensors obtained with optic-electronic technology and can be utilized as speed transducers. They are composed by an electric circuit and an optic disk integral with the shaft. Usually, there are 2 main standards for incremental encoder outputs: Push-pull and Line driver. The first one is useful in case of long wirings, the second one for applications in high electromagnetic pollution environments.

EN2

EN3

EN4

SIN/COS encoder

These encoders are both speed and position sensors obtained with optic-electronic technology and can be used as position and speed transducers at the same time. Usually employed for applications that require very high dynamic features.

EN5

EN6

Absolute encoder

These encoders are position sensors obtained with optic-electronic technology and can be utilized as position transducers. Usually employed for applications that require high precision

	EN1	EN2	EN3	EN4	EN5	EN6
Encoder type	Incremental	Incremental	Incremental	sin/cos	Absolute single turn	Absolute multi-turn
Output interface	TTL/RS 442	TTL/RS 442	HTL push-pull	Sinus VPP 0.5	HIPERFACE®	HIPERFACE®
Power supply voltage VIN [V]	4 ... 6	10 ... 30	12 ... 30	4.4 ... 5.5	7 ... 12	7 ... 12
Output voltage [V]	5	5	12 ... 30	-	-	-
Current in unloaded conditions [mA]	120	100	100	40	80	80
Pulses per revolution	1024					
Steps per revolution	-	-	-	-	15 bit	15 bit
Revolutions	-	-	-	-	-	12 bit
Number of signals	6 (A, B, Z + inverted signals)			6 (\cos^- , \cos^+ , \sin^- , \sin^+ , Z, \bar{Z})	-	-
Max. output frequency [kHz]	600			200		
Max. speed [rpm]				6,000 (9,000 rpm for 10s)		
Temperature range [°C]				-30 ... +100		
Protection class	IP65					

The Bonfiglioli ACU and ANG inverter series can manage all 6 types of encoders mentioned above and can be easily selected through the product configurator platform.

OPTIONS | EVOX ELECTRIC MOTOR SIDE

OPTION DETAIL

Anti-condensation heaters

H1

Anti-condensation heaters

Where an application involves high humidity or extreme temperature fluctuations, e.g. inactive motors in humid atmospheres or motors that are subject to widely fluctuating temperatures, motors may be equipped with an anti-condensate heater. A single-phase power supply is available in the auxiliary terminal board inside the main terminal box.

Values for the absorbed power are listed below:

	H1 1~230V ± 10% P[W]
BXN 63 ... BXN 80	10
BXN 90 ... BXN 132	25

Warning! Always cut off the anti-condensation heater power before operating the motor.

Tropicalization

TP

Tropicalization

The TP option uses stators that are impregnated with highly hydrolysis-resistant resins. This allows the motors to be used in areas with increased air humidity and temperature, such as in tropical climate conditions.

The used wiring insulation materials and the impregnating resin protect the motor against termite-related damage


Second shaft extension

PS

Second shaft extension

The PS option provides the motor for an additional shaft end. This second shaft end is designed with a conventional keyway and key in accordance with DIN 6885 Sheet 1 (ISO 773).

This option is not compatible with variants RC, TC, EC, U1, EN1, EN2, EN3, EN4, EN5, EN6. For shaft dimensions please see motor dimensions tables.

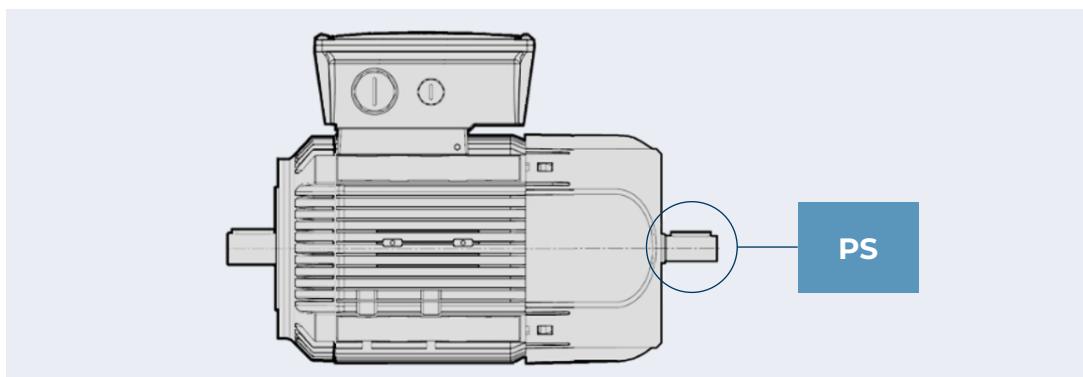

External protection

External protection canopies are used to prevent damages caused by external conditions, such as rain or cellulose particles to the electrical motor.

RC

Rain canopy

The rain canopy protects the motor from dripping and avoids the penetration of solid bodies. It is recommended when motor is installed in a vertical position with the shaft downwards. Only in this position a perfect coverage from rain is granted. The guard extends the length of the motor or brake motor. Please check the [dimensions table](#).

The drip cover is not compatible with variants PS, EN1, EN2, EN3, EN4, EN5, EN6.

TC

Textile canopy

Option TC is a cover variant for textile industry environments, where lint may obstruct the fan grid and prevent a regular flow of cooling air. The overall dimensions are the same as drip cover type RC.

This option with variants PS, EN1, EN2, EN3, EN4, EN5, EN6.



EC

Encoder canopy

Option EC is a cover variant specifically made for our encoders. It protects them from impacts and may help in prolonging their productive life.



OPTIONS | EVOX ELECTRIC MOTOR

MORE ON OPTIONS LIST

Certifications

CN

Global motor

With the CN option, BXN and MXN motors can be sold in the most important markets worldwide such as Europe, UK, USA, Canada, China, Russia, Australia and New Zealand. In detail, the motor will bear the CE, UKCA, UL, CCC and, where required, CEL labelling on the nameplate. The motors also comply with EAC and EECA requirements.

This option is available in the following winding/power combinations:

Motor series	Size	Power	Service Duty	Winding
BXN	63MA a 80MA			
MXN	05MA a 20MA	0,12 a 0,55 kW	S1	WD1 - WD3*
Motor series	Size	Power	Service Duty	Winding
BXN	80MB a 112M			
MXN	20MB a 35M	0,75 a 4 kW	S1	WD1

* Brazilian certification is standard on the WD3 winding only, and additional INMETRO labelling is provided.

BIS

Indian market

With the BIS option, BXN and MXN motors can be sold in the most important markets worldwide such as Europe, UK, USA, Canada, India, Russia, Australia and New Zealand. In detail, the motor will bear the CE, UKCA, UL, ISI marks on the nameplate. The motors also comply with EAC and EECA requirements.

This option is available on the following windings:

Motor series	Size	Power	Winding
BXN	63MA a 112M		
MXN	05MA a 35M	0,12 a 4 kW	WD1 - WD2 - WD3 - WD5 - WD6

Certificates

ACM

Motor certificate of compliance

The document certifies the compliance of the product with the purchase order and the construction in conformity with the applicable procedures of Bonfiglioli's Quality System.

CC


Inspection certificate

The document entails checking the order compliance, visual inspection of external conditions and instrumental testing of the electrical characteristics in unloaded conditions. Inspected units are sampled within the shipping batch and marked individually.



SIZES

EVOX ELECTRIC MOTOR

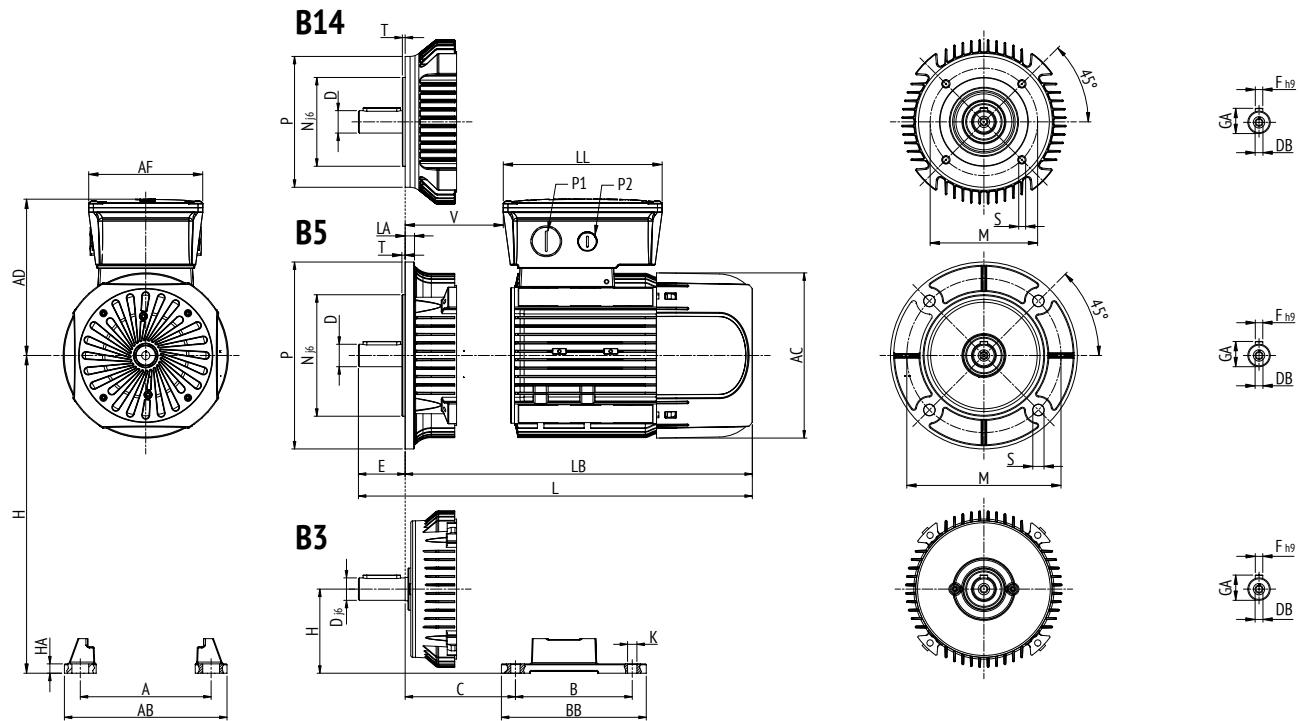



Motor size	Output shaft					Motor overall dimensions							P1	P2
	D	E	DB	GA	F	AC	L	LB	AD	AF	LL	V		
BXN63	11	23	M4	12.5	4	122	281	258	136	112	165	37	M20	M16
BXN71	14	30	M5	16	5	138	292	262	138	112	165	34	M25	M16
BXN80	19	40	M6	21.5	6	158	346	306	148	112	165	40	M25	M16
BXN90	24	50	M8	27	8	177	365	315	170	122	170	43	M25	M16
BXN100	28	60	M10	31	8	192	434	374	179	122	170	42	M25	M16
BXN112	28	60	M10	31	8	220	450	390	191	122	170	62	M25	M16
BXN132	38	80	M12	41	10	255	546	466	216	148	192	63	M25	M16

Motor size	B5 Version						B14 Version				
	M	N	P	S	T	LA	M	N	P	S	T
BXN63	115	95	140	9.5	3	9	75	60	90	M5	2.5
BXN71	130	110	160	9.5	3.5	9	85	70	105	M6	2.5
BXN80	165	130	200	11.5	3.5	10	100	80	120	M6	3
BXN90	165	130	200	11.5	3.5	10	115	95	140	M8	3
BXN100	215	180	250	14	4	11	130	110	160	M8	3.5
BXN112	215	180	250	14	4	11	130	110	160	M8	3.5
BXN132	265	230	300	14	4	12	165	130	200	M8	4

Motor size	B3 Version							
	B	A	HA	BB	AB	K	C	H
BXN63	80	100	8	96	120	7	40	63
BXN71	90	112	8	112	135	7	45	71
BXN80	100	125	8	124	153	10	50	80
BXN90S	100	140	8	155	174	10	56	90
BXN90L	125	140	8	155	174	10	56	90
BXN100	140	160	10	175	202	12	63	100
BXN112	140	190	10	175	224	12	70	112
BXN132S	140	216	12	218	254	12	89	132
BXN132M	178	216	12	218	254	12	89	132


SIZES

BRAKE AND E-MOTOR OPTIONS

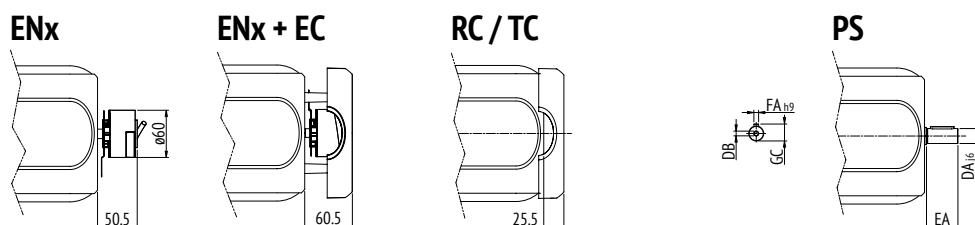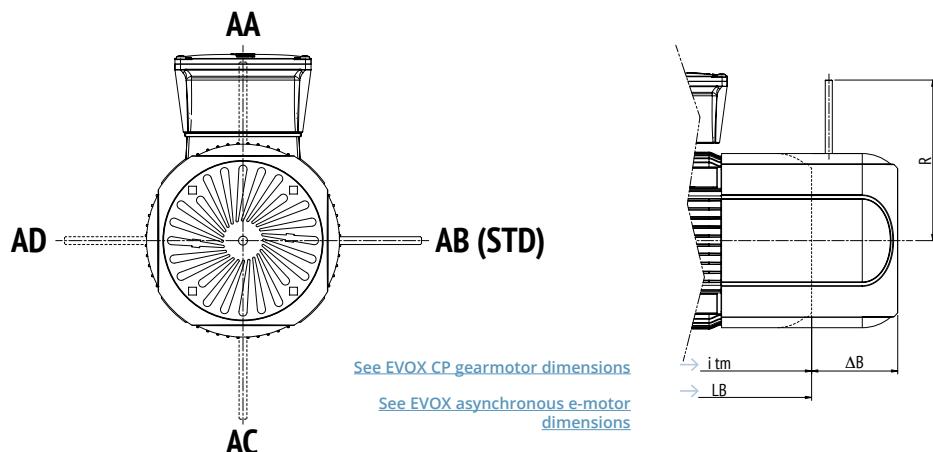

Motor size	ΔB [mm]	R		PS Motor shaft double end				
		FD	FA	DA	EA	DB	GC	FA
		[mm]		[mm]				
BXN63	47	96	116	9	20	M3	10.2	3
BXN71	59	103	121	11	23	M4	12.5	4
BXN80	71	129	131	14	30	M5	16	5
BXN90	68	160	160	19	40	M6	21.5	6
BXN100	87	160	160	24	50	M8	27	8
BXN112	93	199	198	24	50	M8	27	8
BXN132	100	204	217	28	60	M10	31	8

ORDER INFO

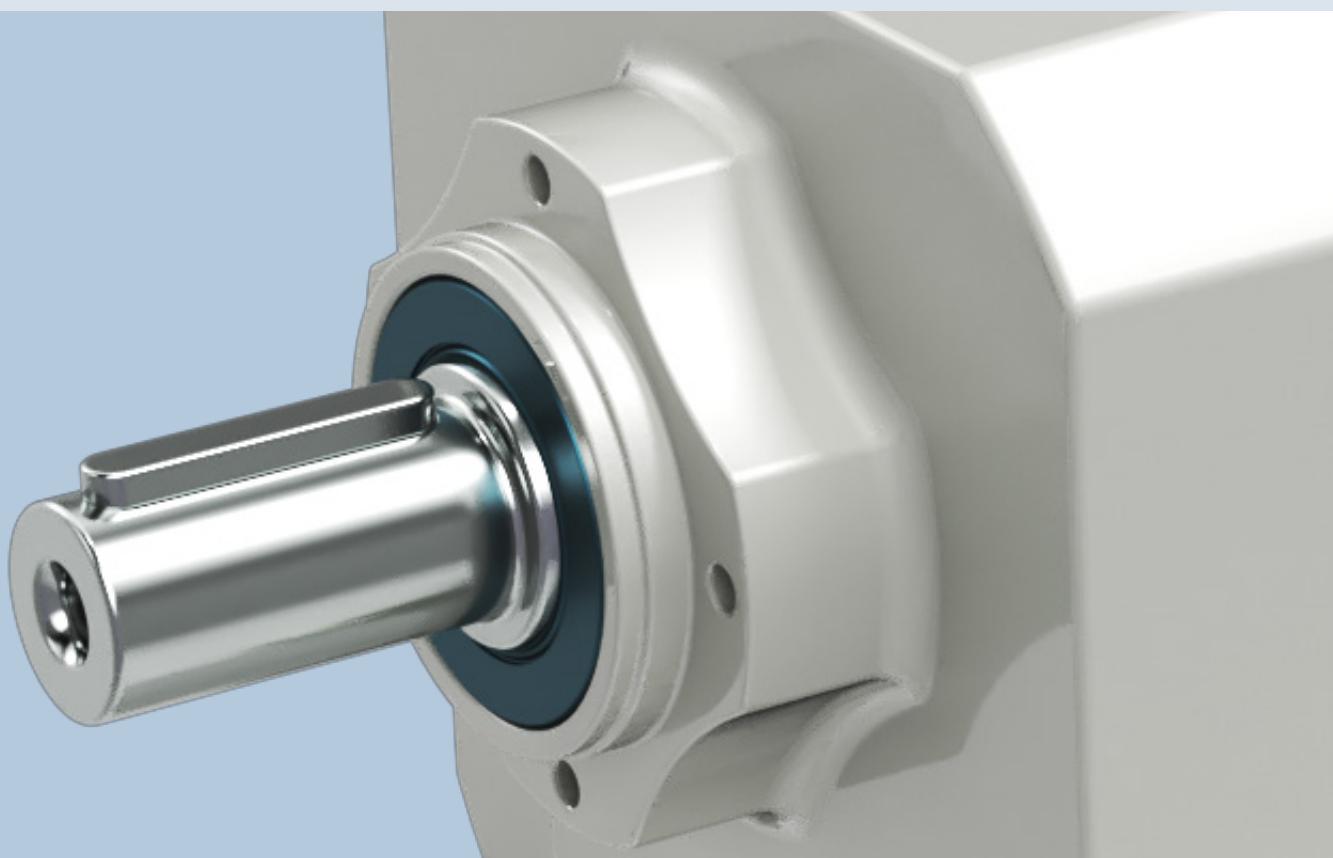

OUR GLOBAL PRESENCE

Thanks to an international network of closely interconnected commercial and production sites, we can guarantee the same high standards of Bonfiglioli quality anywhere at any given time. We know that our direct presence in local markets is the key to long-lasting success, so our family includes 18 production sites, 23 commercial sites and more than 550 distributors around the world.

Our organization is always close by, offering complete and efficient solutions and supporting our customers with dedicated services, co-engineering and after-sales assistance.



18

PRODUCTION SITES



23

COMMERCIAL SITES



80

COUNTRIES



550

DISTRIBUTORS



~4,700

PEOPLE

AUSTRALIA

Bonfiglioli Transmission (Aust.) Pty Ltd
2, Cox Place Glendenning NSW 2761
Locked Bag 1000 Plumpton NSW 2761
Tel. +61 2 8811 8000



BRAZIL

Bonfiglioli Redutores do Brasil Ltda
Av. Osvaldo Fregonezi, 171, cjs 31 e 44
CEP 09851-015 - São Bernardo do Campo
São Paulo
Tel. +55 11 4344 2322



CHINA

Bonfiglioli Drives (Shanghai) Co. Ltd.
#68, Hui-Lian Road, QingPu District,
201707 Shanghai
Tel. +86 21 6700 2000



Industry & Automation Solutions

#568, Longpan Road, Jiading District,
201707 Shanghai



Bonfiglioli Trading (Shanghai) Co. Ltd.


Room 423, 4th Floor, #38, Yinglun Road,
China (Shanghai) Pilot Free Trade Zone,
Shanghai



Selcom Electronics (Shanghai) Co., Ltd
A7, No.5399, Waiqingsong Road, QingPu
District,
201707 Shanghai
Tel. +86 21 6010 8100



A24, No.5399, Waiqingsong Road, QingPu
District,
201707 Shanghai
Tel. +86 21 6010 8100



FRANCE

Bonfiglioli Transmission S.A.S.

14 Rue Eugène Pottier
Zone Industrielle de Moimont II
95670 Marly la Ville
Tel. +33 1 34474510



GERMANY

Bonfiglioli Deutschland GmbH

Sperberweg 12 - 41468 Neuss
Tel. +49 0 2131 2988 0



Bonfiglioli Vectron GmbH

Europark Fichtenhain B6 - 47807 Krefeld
Tel. +49 0 2151 8396 0



O&K Antriebstechnik GmbH

Ruhrallee 8-12 - 45525 Hattingen
Tel. +49 0 2324 2050 1



INDIA

Bonfiglioli Transmission Pvt. Ltd.
Mobility & Wind Industries
AC 7 - 11, SIDCO Industrial Estate,
Thirumudivakkam
Kancheepuram - 600132 - Tamil Nadu
Tel. +91 844 844 8649



Industry & Automation Solutions

Survey No. 528/1, Perambakkam High Road
Mannur Village, Sriperumbudur Taluk
Kancheepuram - 602 105 - Tamil Nadu
Tel. +91 844 844 8649



Industry & Automation Solutions

Plot No E-5/2, Badhalwadi
Talegaon MIDC Phase II,
Pune - 410 507 - Maharashtra
Tel. +91 844 844 8649



Bonfiglioli Drive Systems Pvt. Ltd.

Industry & Automation Solutions
No 50, Papparambakkam Road,
Mannur Village, Sriperumbudur Taluk,
Kancheepuram - 602105 - Tamil Nadu
Tel. +91 844 844 8649



ITALY

Bonfiglioli Riduttori S.p.A.

Industry & Automation Solutions
Via Cav. Clementino Bonfiglioli, 1
40012 Calderara di Reno
Tel. +39 051 647311



Industry & Automation Solutions

Via Sandro Pertini, lotto 7b
20080 Carpiano
Tel. +39 02985081



Industry & Automation Solutions

Via Saliceto, 15 - 40010 Bentivoglio
Bologna



Mobility & Wind Industries

Via Enrico Mattei, 12 Z.I. Villa Selva
47122 Forlì
Tel. +39 0543 789111



Industry & Automation Solutions

Via Unione, 49 - 38068 Rovereto
Tel. +39 0464 443435/36



Selcom Group S.p.A.

Via Achille Grandi, 5
40013 Castel Maggiore (BO)
Tel. +39 051 6387111



Via Marino Serenari, 18
40013 Castel Maggiore (BO)
Tel. +39 051 6387111



Via Cadriano, 19

40057 Cadriano (BO)
Tel. +39 051 6387111



NEW ZEALAND

Bonfiglioli Transmission (Aust.) Pty Ltd
88 Hastie Avenue, Mangere Bridge,
2022 Auckland
PO Box 11795, Ellerslie
Tel. +64 09 634 6441



SINGAPORE

Bonfiglioli South East Asia Pte Ltd
8 Boon Lay Way, #04-09,
8@ Tadehub 21, Singapore 609964
Tel. +65 6268 9869



SLOVAKIA

Bonfiglioli Slovakia s.r.o.
Robotnícka 2129
Považská Bystrica, 01701 Slovakia
Tel. +421 42 430 75 64



SOUTH AFRICA

Bonfiglioli South Africa Pty Ltd.
55 Galaxy Avenue, Linbro Business Park,
Sandton, Johannesburg
2090 South Africa
Tel. +27 11 608 2030



SPAIN

Tecnotrans Bonfiglioli S.A.
Avinguda del Ferrocarril, nº 14,
Polígon Industrial Can Estapé
08755 Castellbisbal - Barcelona
Tel. +34 93 447 84 00



TURKEY

Bonfiglioli Türkiye Jsc
Atatürk Organize Sanayi Bölgesi,
10007 Sk. No. 30
Atatürk Organize Sanayi Bölgesi,
35620 Çiğli - Izmir
Tel. +90 0 232 328 22 77



UNITED KINGDOM

Bonfiglioli UK Ltd.
Unit 1 Calver Quay, Calver Road, Winwick
Warrington, Cheshire - WA2 8UD
Tel. +44 1925 852667



USA

Bonfiglioli USA Inc.
3541 Hargrave Drive
Hebron, Kentucky 41048
Tel. +1 859 334 3333



VIETNAM

Bonfiglioli Vietnam Ltd.
Lot C-9D-CN My Phuoc Industrial Park 3
Ben Cat - Binh Duong Province
Tel. +84 650 3577411





We have a relentless commitment to excellence, innovation & sustainability. Our team creates, distributes and services world-class power transmission & drive solutions to keep the world in motion.

HEADQUARTERS

Bonfiglioli S.p.A

Via Cav. Clementino Bonfiglioli, 1
40012 Calderara di Reno - Bologna (Italy)
Tel. +39 051 6473111