

Browning®




BROWNING® E920 TAPERED ROLLER BEARING



RegalRexnord™

BROWNING® TAPERED ROLLER BEARING

E920 Series

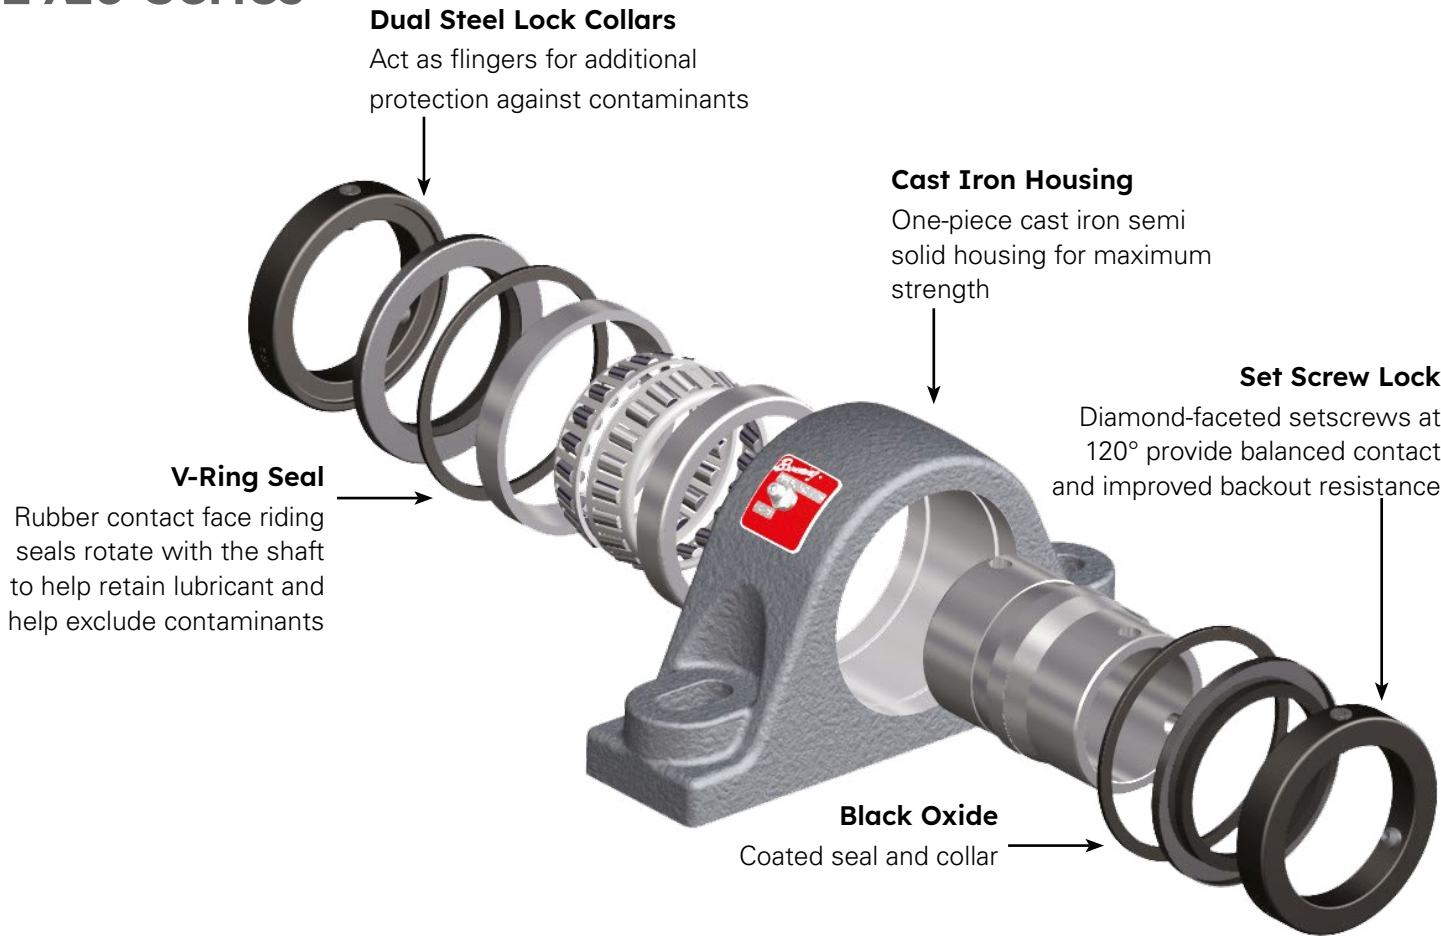

COMPETITIVE COMPARISON




	Seal Types	Seal Mount	Setscrew Angle	Setscrew Type	Seal Treatment	Collar Treatment
Browning® E920	Contact	Race-Mounted, rotates with shaft	120°	Diamond Faceted	Black Oxide	Black Oxide
Dodge** Type E	Contact	Housing Mount, Stationary	65°	Cup Point	N/A	Paint
Timken** Type E	Contact	Housing Mount, Stationary	65°	Cup Point	N/A	Paint
Moline Type E	Contact	Housing Mount, Stationary	65°	Cup Point	N/A	Black Oxide
Royersford™*	Contact	Housing Mount, Stationary	120°	Cup Point	N/A	Black Oxide

QUICK INTERCHANGE GUIDE

		Brand				
		Browning®	Dodge*	Timken*	Moline	Royersford*
Series	PBE	P2B-E	E-P2B-TRB	19321	20-02	
	PBFE	P4B-E	E-P4B-TRB	19341	20-04	
	FBE	F4B-E	E-4BF-TRB	19331	20-05	
	TUE	WSTU-E	E-TU-TRB	19351	20-07	

* The following are believed to be the trademarks and/or trade names of their respective owners and are not owned or controlled by Regal Rexnord Corporation. Dodge: ABB ASEA Brown Boveri, Ltd.; Timken: The Timken Company; Royersford : Royersford Foundry & Machine Co., Inc.


E920 PILLOW BLOCK

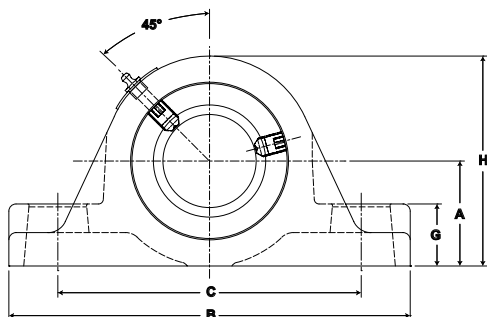

Shaft Dia. (in)	Part Description	Basic Dynamic Rating C (lb)	Dimensions (in)												Unit Wt. (lb)*	Dodge®* Inter- change
			A	B	C		D	E	G	H	J	K	L	Bolt Size		
					MIN.	MAX.										
TWO BOLT BASE																
1 3/16	PBE920x 1 3/16	2,975	1 1/2	6 3/8	4 5/16	5	1 7/8	-	7/8	3	2 3/4	1 25/64	2 1/4	1/2	4	P2B-E-103R
1 1/4	PBE920x 1 1/4	2,975	1 1/2	6 3/8	4 5/16	5	1 7/8	-	7/8	3	2 3/4	1 25/64	2 1/4	1/2	4	P2B-E-104R
1 3/8	PBE920x 1 3/8	4,760	1 7/8	7 3/8	5	6	2 1/8	-	1 1/8	3 3/4	3	1 1/2	2 3/4	1/2	7	P2B-E-106R
1 7/16	PBE920x 1 7/16	4,760	1 7/8	7 3/8	5	6	2 1/8	-	1 1/8	3 3/4	3	1 1/2	2 3/4	1/2	7	P2B-E-107R
1 1/2	PBE920x 1 1/2	6,140	2 1/8	7 7/8	5 11/16	6 1/2	2 1/2	-	1 1/4	4 1/4	3 3/8	1 11/16	3 3/16	1/2	10	P2B-E-108R
1 5/8	PBE920x 1 5/8	6,140	2 1/8	7 7/8	5 11/16	6 1/2	2 1/2	-	1 1/4	4 1/4	3 3/8	1 11/16	3 3/16	1/2	10	P2B-E-110R
1 11/16	PBE920x 1 11/16	6,140	2 1/8	7 7/8	5 11/16	6 1/2	2 1/2	-	1 1/4	4 1/4	3 3/8	1 11/16	3 3/16	1/2	10	P2B-E-111R
1 3/4	PBE920x 1 3/4	8,070	2 1/4	8 7/8	6 3/16	7 1/4	2 1/2	-	1 1/4	4 1/2	3 1/2	1 3/4	3 7/16	5/8	11	P2B-E-112R
1 15/16	PBE920x 1 15/16	8,070	2 1/4	8 7/8	6 3/16	7 1/4	2 1/2	-	1 1/4	4 1/2	3 1/2	1 3/4	3 7/16	5/8	11	P2B-E-115R
2	PBE920x 2	8,070	2 1/4	8 7/8	6 3/16	7 1/4	2 1/2	-	1 1/4	4 1/2	3 1/2	1 3/4	3 7/16	5/8	11	P2B-E-200R
2 3/16	PBE920x 2 3/16	8,570	2 1/2	9 5/8	6 11/16	8	2 5/8	-	1 7/16	5	3 3/4	1 7/8	3 3/4	5/8	14	P2B-E-203R
2 1/4	PBE920x 2 1/4	9,030	2 3/4	10 1/2	7 1/8	8 3/4	2 7/8	-	1 5/8	5 1/2	4	2	4 1/16	5/8	19	P2B-E-204R
2 7/16	PBE920x 2 7/16	9,030	2 3/4	10 1/2	7 1/8	8 3/4	2 7/8	-	1 5/8	5 1/2	4	2	4 1/16	5/8	19	P2B-E-207R
2 1/2	PBE920x 2 1/2	9,030	2 3/4	10 1/2	7 1/8	8 3/4	2 7/8	-	1 5/8	5 1/2	4	2	4 1/16	5/8	19	P2B-E-208R
2 11/16	PBE920x 2 11/16	9,630	3 1/8	12	8 7/16	9 3/4	3	-	1 3/4	6 1/4	4 1/2	2 1/4	4 23/32	3/4	26	P2B-E-211R
2 3/4	PBE920x 2 3/4	9,630	3 1/8	12	8 7/16	9 3/4	3	-	1 3/4	6 1/4	4 1/2	2 1/4	4 23/32	3/4	26	P2B-E-212R
2 15/16	PBE920x 2 15/16	9,630	3 1/8	12	8 7/16	9 3/4	3	-	1 3/4	6 1/4	4 1/2	2 1/4	4 23/32	3/4	26	P2B-E-215R
3	PBE920x 3	9,630	3 1/8	12	8 7/16	9 3/4	3	-	1 3/4	6 1/4	4 1/2	2 1/4	4 23/32	3/4	26	P2B-E-300R
3 3/16	PBE920x 3 3/16	15,320	3 3/4	14	9 3/4	11 1/2	3 5/8	-	2 1/8	7 1/2	5	2 1/2	5 7/16	7/8	44	P2B-E-303R
3 7/16	PBE920x 3 7/16	15,320	3 3/4	14	9 3/4	11 1/2	3 5/8	-	2 1/8	7 1/2	5	2 1/2	5 7/16	7/8	44	P2B-E-307R
3 1/2	PBE920x 3 1/2	15,320	3 3/4	14	9 3/4	11 1/2	3 5/8	-	2 1/8	7 1/2	5	2 1/2	5 7/16	7/8	44	P2B-E-308R
FOUR BOLT BASE																
2 1/4	PBE920Fx 2 1/4	9,030	2 3/4	10 1/2	7 1/8	8 3/4	3 1/2	1 7/8	1 5/8	5 1/2	4	2	4 1/16	5/8	19	P4B-E-204R
2 7/16	PBE920Fx 2 7/16	9,030	2 3/4	10 1/2	7 1/8	8 3/4	3 1/2	1 7/8	1 5/8	5 1/2	4	2	4 1/16	5/8	19	P4B-E-207R
2 1/2	PBE920Fx 2 1/2	9,030	2 3/4	10 1/2	7 1/8	8 3/4	3 1/2	1 7/8	1 5/8	5 1/2	4	2	4 1/16	5/8	19	P4B-E-208R
2 11/16	PBE920Fx 2 11/16	9,630	3 1/8	12	8	9 7/8	4	2 1/8	1 3/4	6 1/4	4 1/2	2 1/4	4 23/32	5/8	26	P4B-E-211R
2 3/4	PBE920Fx 2 3/4	9,630	3 1/8	12	8	9 7/8	4	2 1/8	1 3/4	6 1/4	4 1/2	2 1/4	4 23/32	5/8	26	P4B-E-212R
2 15/16	PBE920Fx 2 15/16	9,630	3 1/8	12	8	9 7/8	4	2 1/8	1 3/4	6 1/4	4 1/2	2 1/4	4 23/32	5/8	26	P4B-E-215R
3	PBE920Fx 3	9,630	3 1/8	12	8	9 7/8	4	2 1/8	1 3/4	6 1/4	4 1/2	2 1/4	4 23/32	5/8	26	P4B-E-300R
3 3/16	PBE920Fx 3 3/16	15,320	3 3/4	14	9 11/16	11 7/16	4 1/2	2 3/8	2 1/8	7 1/2	5	2 1/2	5 7/16	3/4	44	P4B-E-303R
3 7/16	PBE920Fx 3 7/16	15,320	3 3/4	14	9 11/16	11 7/16	4 1/2	2 3/8	2 1/8	7 1/2	5	2 1/2	5 7/16	3/4	44	P4B-E-307R
3 1/2	PBE920Fx 3 1/2	15,320	3 3/4	14	9 11/16	11 7/16	4 1/2	2 3/8	2 1/8	7 1/2	5	2 1/2	5 7/16	3/4	44	P4B-E-308R
3 15/16	PBE920Fx 3 15/16	20,980	4 1/4	15 1/4	10 7/16	12 7/8	4 1/2	2 1/4	2 7/16	8 1/2	6 1/4	3 1/8	5 15/16	3/4	65	P4B-E-315R
4	PBE920Fx 4	20,980	4 1/4	15 1/4	10 7/16	12 7/8	4 1/2	2 1/4	2 7/16	8 1/2	6 1/4	3 1/8	5 15/16	3/4	65	P4B-E-400R
4 7/16	PBE920Fx 4 7/16	25,750	4 3/4	16 5/8	11 1/4	13 7/8	4 1/2	2 1/2	2 3/4	9 3/8	6 3/4	3 3/8	6 13/32	3/4	65	P4B-E-407R
4 1/2	PBE920Fx 4 1/2	25,750	4 3/4	16 5/8	11 1/4	13 7/8	4 1/2	2 1/2	2 3/4	9 3/8	6 3/4	3 3/8	6 13/32	3/4	65	P4B-E-408R
4 15/16	PBE920Fx 4 15/16	35,520	5 1/2	18 1/2	13	15 7/8	5 1/8	2 3/4	3 1/8	10 7/8	7 1/4	3 5/8	7 13/32	7/8	132	P4B-E-415R
5	PBE920Fx 5	35,520	5 1/2	18 1/2	13	15 7/8	5 1/8	2 3/4	3 1/8	10 7/8	7 1/4	3 5/8	7 13/32	7/8	132	P4B-E-500R

* rounded to nearest lb



E920 FOUR-BOLT FLANGE

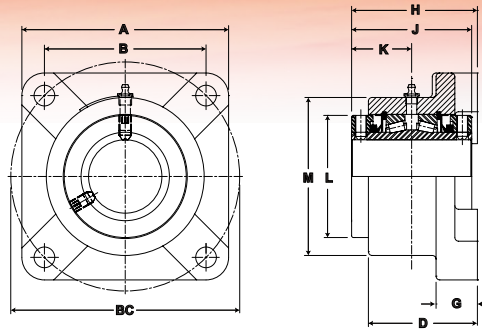

Shaft Dia. (in)	Part Description	Basic Dynamic Rating C (lb)	Dimensions (in)										Unit Wt. (lb)*	Dodge®* Interchange
			A	B.C.	B	D	G	H	J	L	M	BOLT SIZE		
1 3/16	FBE920x 1 3/16	2,975	3 3/4	4 1/16	2 7/8	2 3/8	1 1/32	2 27/32	2 3/4	2 1/4	3	3/8	5	F4B-E-103R
1 1/4	FBE920x 1 1/4	2,975	3 3/4	4 1/16	2 7/8	2 3/8	1 1/32	2 27/32	2 3/4	2 1/4	3	3/8	5	F4B-E-104R
1 3/8	FBE920x 1 3/8	4,760	4 5/8	4 61/64	3 1/2	2 5/8	1 1/16	3 5/64	3	2 3/4	3 5/8	1/2	7	F4B-E-106R
1 7/16	FBE920x 1 7/16	4,760	4 5/8	4 61/64	3 1/2	2 5/8	1 1/16	3 5/64	3	2 3/4	3 5/8	1/2	7	F4B-E-107R
1 1/2	FBE920x 1 1/2	6,140	5 3/8	5 53/64	4 1/8	3	1 3/16	3 29/64	3 3/8	3 3/16	4 1/4	1/2	10	F4B-E-108R
1 5/8	FBE920x 1 5/8	6,140	5 3/8	5 53/64	4 1/8	3	1 3/16	3 29/64	3 3/8	3 3/16	4 1/4	1/2	10	F4B-E-110R
1 11/16	FBE920x 1 11/16	6,140	5 3/8	5 53/64	4 1/8	3	1 3/16	3 29/64	3 3/8	3 3/16	4 1/4	1/2	10	F4B-E-111R
1 3/4	FBE920x 1 3/4	8,070	5 5/8	6 3/16	4 3/8	3 1/8	1 3/16	3 5/8	3 1/2	3 7/16	4 1/2	1/2	12	F4B-E-112R
1 15/16	FBE920x 1 15/16	8,070	5 5/8	6 3/16	4 3/8	3 1/8	1 3/16	3 5/8	3 1/2	3 7/16	4 1/2	1/2	12	F4B-E-115R
2	FBE920x 2	8,070	5 5/8	6 3/16	4 3/8	3 1/8	1 3/16	3 5/8	3 1/2	3 7/16	4 1/2	1/2	12	F4B-E-200R
2 3/16	FBE920x 2 3/16	8,570	6 1/4	6 57/64	4 7/8	3 5/16	1 1/4	3 7/8	3 3/4	3 3/4	4 7/8	5/8	16	F4B-E-203R
2 1/4	FBE920x 2 1/4	9,030	6 7/8	7 39/64	5 3/8	3 5/8	1 1/2	4 3/16	4	4 1/16	5 1/4	5/8	21	F4B-E-204R
2 7/16	FBE920x 2 7/16	9,030	6 7/8	7 39/64	5 3/8	3 5/8	1 1/2	4 3/16	4	4 1/16	5 1/4	5/8	21	F4B-E-207R
2 1/2	FBE920x 2 1/2	9,030	6 7/8	7 39/64	5 3/8	3 5/8	1 1/2	4 3/16	4	4 1/16	5 1/4	5/8	21	F4B-E-208R
2 11/16	FBE920x 2 11/16	9,630	7 3/4	8 31/64	6	3 15/16	1 5/8	4 11/16	4 1/2	4 23/32	6 1/8	3/4	28	F4B-E-211R
2 3/4	FBE920x 2 3/4	9,630	7 3/4	8 31/64	6	3 15/16	1 5/8	4 11/16	4 1/2	4 23/32	6 1/8	3/4	28	F4B-E-212R
2 15/16	FBE920x 2 15/16	9,630	7 3/4	8 31/64	6	3 15/16	1 5/8	4 11/16	4 1/2	4 23/32	6 1/8	3/4	28	F4B-E-215R
3	FBE920x 3	9,630	7 3/4	8 31/64	6	3 15/16	1 5/8	4 11/16	4 1/2	4 23/32	6 1/8	3/4	28	F4B-E-300R
3 3/16	FBE920x 3 3/16	15,320	9 1/4	9 29/32	7	4 9/16	1 7/8	5 1/4	5	5 7/16	7 1/2	3/4	46	F4B-E-303R
3 7/16	FBE920x 3 7/16	15,320	9 1/4	9 29/32	7	4 9/16	1 7/8	5 1/4	5	5 7/16	7 1/2	3/4	46	F4B-E-307R
3 1/2	FBE920x 3 1/2	15,320	9 1/4	9 29/32	7	4 9/16	1 7/8	5 1/4	5	5 7/16	7 1/2	3/4	46	F4B-E-307R
3 15/16	FBE920x 3 15/16	20,980	10 1/4	10 31/32	7 3/4	5 11/16	2 3/16	6 9/16	6 1/4	5 15/16	8 1/4	7/8	64	F4B-E-315R
4	FBE920x 4	20,980	10 1/4	10 31/32	7 3/4	5 11/16	2 3/16	6 9/16	6 1/4	5 15/16	8 1/4	7/8	64	F4B-E-400R

* rounded to nearest lb

E920 WIDE-SLOT TAKE UP

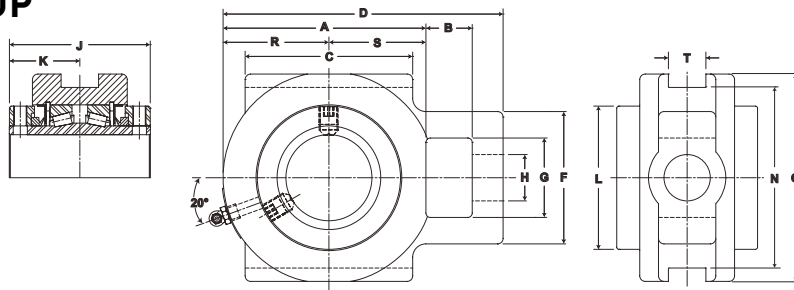



Shaft Dia. (in)	Part Description	Basic Dynamic Rating C (lb)	Dimensions (in)															Unit Wt. (lb)*	Dodge® Interchange
			A	B	C	D	F	G	H	J	K	L	N	O	R	S	T		
1 3/8	TUE920x 1 3/8	4,760	3 3/4	5/8	2 3/4	5 3/32	2 7/16	1 7/16	13/16	3	1 1/2	2 3/4	3 1/2	4 1/8	1 3/4	1 29/32	17/32	6	WSTU-E-103R
1 7/16	TUE920x 1 7/16	4,760	3 3/4	5/8	2 3/4	5 3/32	2 7/16	1 7/16	13/16	3	1 1/2	2 3/4	3 1/2	4 1/8	1 3/4	1 29/32	17/32	6	WSTU-E-107R
1 1/2	TUE920x 1 1/2	6,140	4 5/16	1 1/16	3 1/4	6	2 7/8	1 15/16	1 1/16	3 3/8	1 11/16	3 3/16	4	4 3/4	2 1/4	2 1/8	11/16	9	WSTU-E-108R
1 11/16	TUE920x 1 11/16	6,140	4 5/16	1 1/16	3 1/4	6	2 7/8	1 15/16	1 1/16	3 3/8	1 11/16	3 3/16	4	4 3/4	2 1/4	2 1/8	11/16	9	WSTU-E-111R
1 3/4	TUE920x 1 3/4	8,070	4 3/8	1 1/16	3 1/2	6 3/16	2 7/8	1 15/16	1 1/16	3 1/2	1 3/4	3 7/16	4	4 3/4	2 1/2	2 1/8	11/16	12	WSTU-E-112R
1 15/16	TUE920x 1 15/16	8,070	4 3/8	1 1/16	3 1/2	6 3/16	2 7/8	1 15/16	1 1/16	3 1/2	1 3/4	3 7/16	4	4 3/4	2 1/2	2 1/8	11/16	12	WSTU-E-115R
2	TUE920x 2	8,070	4 3/8	1 1/16	3 1/2	6 3/16	2 7/8	1 15/16	1 1/16	3 1/2	1 3/4	3 7/16	4	4 3/4	2 1/2	2 1/8	11/16	12	WSTU-E-200R
2 3/16	TUE920x 2 3/16	8,570	4 7/8	1 3/16	3 3/4	6 13/16	3 1/2	2 1/4	1 3/16	3 3/4	1 7/8	3 3/4	4 1/2	5 1/4	2 1/2	2 3/8	13/16	16	WSTU-E-203R
2 7/16	TUE920x 2 7/16	9,030	5 3/4	1 5/16	4 3/4	7 15/16	3 3/4	2 1/4	1 5/16	4	2	4 1/16	5 1/8	5 7/8	3	2 3/4	1 1/16	21	WSTU-E-207R
2 1/2	TUE920x 2 1/2	9,030	5 3/4	1 5/16	4 3/4	7 15/16	3 3/4	2 1/4	1 5/16	4	2	4 1/16	5 1/8	5 7/8	3	2 3/4	1 1/16	21	WSTU-E-208R
2 11/16	TUE920x 2 11/16	9,630	6 3/16	1 9/16	4 3/4	8 3/4	4 1/4	2 3/4	1 9/16	4 1/2	2 1/4	4 23/32	5 15/16	6 3/4	3 1/4	3	1 13/16	30	WSTU-E-211R
2 3/4	TUE920x 2 3/4	9,630	6 3/16	1 9/16	4 3/4	8 3/4	4 1/4	2 3/4	1 9/16	4 1/2	2 1/4	4 23/32	5 15/16	6 3/4	3 1/4	3	1 13/16	30	WSTU-E-212R
2 15/16	TUE920x 2 15/16	9,630	6 3/16	1 9/16	4 3/4	8 3/4	4 1/4	2 3/4	1 9/16	4 1/2	2 1/4	4 23/32	5 15/16	6 3/4	3 1/4	3	1 13/16	30	WSTU-E-215R
3	TUE920x 3	9,630	6 3/16	1 9/16	4 3/4	8 3/4	4 1/4	2 3/4	1 9/16	4 1/2	2 1/4	4 23/32	5 15/16	6 3/4	3 1/4	3	1 13/16	30	WSTU-E-300R
3 7/16	TUE920x 3 7/16	15,320	7 5/8	1 13/16	6 1/4	10 7/16	4 7/8	2 7/8	1 13/16	5	2 1/2	5 7/16	6 13/16	7 5/8	4	3 5/8	1 13/16	44	WSTU-E-307R
3 15/16	TUE920x 3 15/16	20,980	8 9/16	2 1/8	7	11 13/16	5 5/8	3 3/8	2 3/16	6 1/4	3 1/8	5 15/16	8 5/8	9 7/16	4 1/2	4 1/8	2 1/16	70	WSTU-E-315R
4 7/16	TUE920x 4 7/16	25,750	8 9/16	2 1/8	7	11 13/16	5 5/8	3 3/8	2 3/16	6 3/4	3 3/8	6 13/32	8 5/8	9 7/16	4 1/2	4 1/8	2 1/16	74	WSTU-E-407R

* Dodge is believed to be the trademark and/or trade names of ABB ASEA Brown Boveri, Ltd. and is not owned or controlled by Regal Rexnord Corporation.

* rounded to nearest lb



CENTER-PULL TAKE-UP FRAMES

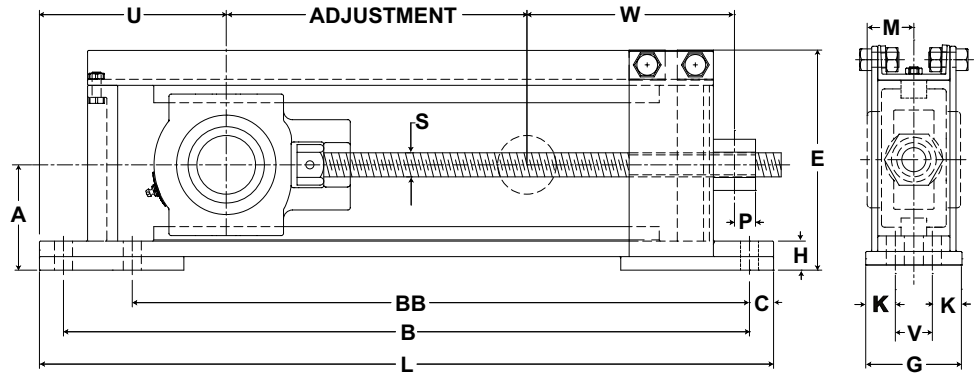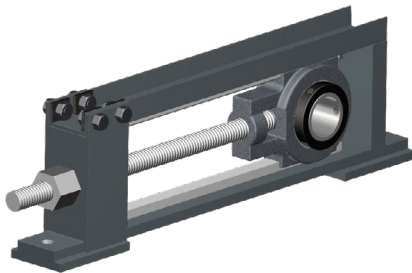

Shaft Dia. (in)	Part Description	Dimensions (in)																			Unit Wt. (lb)*	Dodge®** Inter-change
		Travel		A	B	BB	C	E	G	H	K	L	M	P	S	U	V	W	BOLTS REQ'D			
		Nominal	Max																NO.	Size		
1 3/4	12-16.5T1000D	12	16.5	3 15/16	27 1/2	26 1/2	1	8 9/32	4	1 1/4	-	29 1/2	1 7/8	1 1/4	1-8NC	5 3/8	-	5 5/8	2	5/8	60	CP400X12
1 15/16	18-22.5T1000D	18	22.5	3 15/16	33 1/2	32 1/2	1	8 9/32	4	1 1/4	-	35 1/2	1 7/8	1 1/4	1-8NC	5 3/8	-	5 5/8	2	5/8	70	CP400X18
2	24-28.5T1000D	24	28.5	3 15/16	39 1/2	38 1/2	1	8 9/32	4	1 1/4	-	41 1/2	1 7/8	1 1/4	1-8NC	5 3/8	-	5 5/8	2	5/8	80	CP400X24
2 3/16	12-17T1000EL	12	17	4 3/16	27 1/2	-	1	8 21/32	4	1 3/8	-	29 1/2	2	1 5/8	1 1/8-7NC	4 9/16	-	5 15/16	2	5/8	65	-
	18-23T1000EL	18	23	4 3/16	33 1/2	-	1	8 21/32	4	1 3/8	-	35 1/2	2	1 5/8	1 1/8-7NC	4 9/16	-	5 15/16	2	5/8	77	-
	24-29T1000EL	24	29	4 3/16	39 1/2	-	1	8 21/32	4	1 3/8	-	41 1/2	2	1 5/8	1 1/8-7NC	4 9/16	-	5 15/16	2	5/8	86	-
2 3/16	12-17T1000EH	12	17	4 7/16	27 1/2	-	1	8 29/32	4	1 5/8	-	29 1/2	2	1 5/8	1 1/8-7NC	4 9/16	-	5 15/16	2	5/8	68	CP408X12
	18-23T1000EH	18	23	4 7/16	33 1/2	-	1	8 29/32	4	1 5/8	-	35 1/2	2	1 5/8	1 1/8-7NC	4 9/16	-	5 15/16	2	5/8	80	CP408X18
	24-29T1000EH	24	29	4 7/16	39 1/2	-	1	8 29/32	4	1 5/8	-	41 1/2	2	1 5/8	1 1/8-7NC	4 9/16	-	5 15/16	2	5/8	91	CP408X24
	12-16.6T1000F	12	16.6	4 3/8	28 1/2	-	1	9 9/32	4	1 1/8	-	30 1/2	2 1/8	1 3/4	1 1/4-7NC	5 5/16	-	6 9/16	2	3/4	71	CP502X12
2 7/16	18-22.6T1000F	18	22.6	4 3/8	34 1/2	-	1	9 9/32	4	1 1/8	-	36 1/2	2 1/8	1 3/4	1 1/4-7NC	5 5/16	-	6 9/16	2	3/4	81	CP502X18
2 1/2	24-28.6T1000F	24	28.6	4 3/8	40 1/2	-	1	9 9/32	4	1 1/8	-	42 1/2	2 1/8	1 3/4	1 1/4-7NC	5 5/16	-	6 9/16	2	3/4	91	CP502X24
	30-34.6T1000F	30	3.6	4 3/8	46 1/2	-	1	9 9/32	4	1 1/8	-	48 1/2	2 1/8	1 3/4	1 1/4-7NC	5 5/16	-	6 9/16	2	3/4	111	CP502X30
2 11/16	12-15.5T1000GL	12	15.5	4 15/16	30 1/2	-	1	10 11/16	5	31/32	1 1/2	32 1/2	2 3/8	1/2	1 1/2-6NC	6 1/2	2	8 1/2	4	5/8	105	-
2 3/4	18-21.5T1000GL	18	21.5	4 15/16	36 1/2	-	1	10 11/16	5	31/32	1 1/2	38 1/2	2 3/8	1/2	1 1/2-6NC	6 1/2	2	8 1/2	4	5/8	120	-
2 15/16	24-27.5T1000GL	24	27.5	4 15/16	42 1/2	-	1	10 11/16	5	31/32	1 1/2	44 1/2	2 3/8	1/2	1 1/2-6NC	6 1/2	2	8 1/2	4	5/8	135	-
3	30-33.5T1000GL	30	33.5	4 15/16	48 1/2	-	1	10 11/16	5	31/32	1 1/2	50 1/2	2 3/8	1/2	1 1/2-6NC	6 1/2	2	8 1/2	4	5/8	150	-
2 11/16	12-15.5T1000GH	12	15.5	5 1/8	30 1/2	-	1	10 7/8	5	1 5/32	1 1/2	32 1/2	2 3/8	1/2	1 1/2-6NC	6 1/2	2	8 1/2	4	5/8	109	CP515X12
2 3/4	18-21.5T1000GH	18	21.5	5 1/8	36 1/2	-	1	10 7/8	5	1 5/32	1 1/2	38 1/2	2 3/8	1/2	1 1/2-6NC	6 1/2	2	8 1/2	4	5/8	126	CP515X18
2 15/16	24-27.5T1000GH	24	27.5	5 1/8	42 1/2	-	1	10 7/8	5	1 5/32	1 1/2	44 1/2	2 3/8	1/2	1 1/2-6NC	6 1/2	2	8 1/2	4	5/8	141	CP515X24
3	30-33.5T1000GH	30	33.5	5 1/8	48 1/2	-	1	10 7/8	5	1 5/32	1 1/2	50 1/2	2 3/8	1/2	1 1/2-6NC	6 1/2	2	8 1/2	4	5/8	156	CP515X30
3 3/16	12-15.5T1000JL	12	15.5	5 7/16	32	-	1 1/8	11 5/8	5	1 1/32	1 1/2	34 1/4	2 19/32	1	1 3/4-5NC	7 5/16	2	9 3/16	4	3/4	138	138
3 7/16	18-21.5T1000JL	18	21.5	5 7/16	38	-	1 1/8	11 5/8	5	1 1/32	1 1/2	40 1/4	2 19/32	1	1 3/4-5NC	7 5/16	2	9 3/16	4	3/4	156	156
3 1/2	24-27.5T1000JL	24	27.5	5 7/16	44	-	1 1/8	11 5/8	5	1 1/32	1 1/2	46 1/4	2 19/32	1	1 3/4-5NC	7 5/16	2	9 3/16	4	3/4	173	173
	30-33.5T1000JL	30	33.5	5 7/16	50	-	1 1/8	11 5/8	5	1 1/32	1 1/2	52 1/4	2 19/32	1	1 3/4-5NC	7 5/16	2	9 3/16	4	3/4	191	191
3 3/16	12-15.5T1000JH	12	15.5	5 5/8	32	-	1 1/8	11 13/16	5	1 7/32	1 1/2	34 1/4	2 19/32	1	1 3/4-5NC	7 5/16	2	9 3/16	4	3/4	145	CP613X12
3 7/16	18-21.5T1000JH	18	21.5	5 5/8	38	-	1 1/8	11 13/16	5	1 7/32	1 1/2	40 1/4	2 19/32	1	1 3/4-5NC	7 5/16	2	9 3/16	4	3/4	163	CP613X18
3 1/2	24-27.5T1000JH	24	27.5	5 5/8	44	-	1 1/8	11 13/16	5	1 7/32	1 1/2	46 1/4	2 19/32	1	1 3/4-5NC	7 5/16	2	9 3/16	4	3/4	179	CP613X24
	30-33.5T1000JH	30	33.5	5 5/8	50	-	1 1/8	11 13/16	5	1 7/32	1 1/2	52 1/4	2 19/32	1	1 3/4-5NC	7 5/16	2	9 3/16	4	3/4	197	CP613X30
3 11/16	12-18T1000K	12	18	7	36	-	1 1/4	14 15/32	6	1 7/16	1 3/4	38 1/2	2 31/32	1 5/8	2-4 1/2NC	7 1/2	2 1/2	10 7/16	4	3/4	191	CP810X12
3 15/16	18-24T1000K	18	24	7	42	-	1 1/4	14 15/32	6	1 7/16	1 3/4	44 1/2	2 31/32	1 5/8	2-4 1/2NC	7 1/2	2 1/2	10 7/16	4	3/4	223	CP810X18
4 7/16	24-30T1000K	24	30	7	48	-	1 1/4	14 15/32	6	1 7/16	1 3/4	50 1/2	2 31/32	1 5/8	2-4 1/2NC	7 1/2	2 1/2	10 7/16	4	3/4	249	CP810X24
4 1/2	30-36T1000K	30	36	7	54	-	1 1/4	14 15/32	6	1 7/16	1 3/4	56 1/2	2 31/32	1 5/8	2-4 1/2NC	7 1/2	2 1/2	10 7/16	4	3/4	274	CP810X30

* rounded to nearest lb

For specific interchange information and dimensional comparisons, please visit Smart Interchange at www.Regalrexnord.com under Engineering Tools.



**Motion Control Solutions
Regal Rexnord**

Customer Service: 800-626-2120

Technical Service: 800-626-2093

CustomerService.PTSolutions@regalrexnord.com

regalrexnord.com

The proper selection and application of products and components, including assuring that the product is safe for its intended use, are the responsibility of the customer. To view our Application Considerations, please visit <https://www.regalrexnord.com/Application-Considerations>.

To view our Standard Terms and Conditions of Sale, please visit <https://www.regalrexnord.com/Terms-and-Conditions-of-Sale> (which may redirect to other website locations based on product family).

"Regal Rexnord" is not indicative of legal entity. Refer to product purchase documentation for the applicable legal entity.

Regal Rexnord and Browning are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

© 2017, 2022 Regal Rexnord Corporation, All Rights Reserved. MCB22077E • Form# 10125E

